

# Current Mode PWM Controller

## FEATURES

- Optimized for Off-line and DC to DC Converters
- Low Start Up Current (<0.5mA)
- Trimmed Oscillator Discharge Current
- Automatic Feed Forward Compensation
- Pulse-by-Pulse Current Limiting
- Enhanced Load Response Characteristics
- Under-Voltage Lockout With Hysteresis
- Double Pulse Suppression
- High Current Totem Pole Output
- Internally Trimmed Bandgap Reference
- 500kHz Operation
- Low Ro Error Amp


## DESCRIPTION

The UC1842A/3A/4A/5A family of control ICs is a pin for pin compatible improved version of the UC3842/3/4/5 family. Providing the necessary features to control current mode switched mode power supplies, this family has the following improved features. Start up current is guaranteed to be less than 0.5mA. Oscillator discharge is trimmed to 8.3mA. During under voltage lockout, the output stage can sink at least 10mA at less than 1.2V for VCC over 5V.

The difference between members of this family are shown in the table below.

| Part #  | UVLO On | UVLO Off | Maximum Duty Cycle |
|---------|---------|----------|--------------------|
| UC1842A | 16.0V   | 10.0V    | <100%              |
| UC1843A | 8.5V    | 7.9V     | <100%              |
| UC1844A | 16.0V   | 10.0V    | <50%               |
| UC1845A | 8.5V    | 7.9V     | <50%               |

## BLOCK DIAGRAM

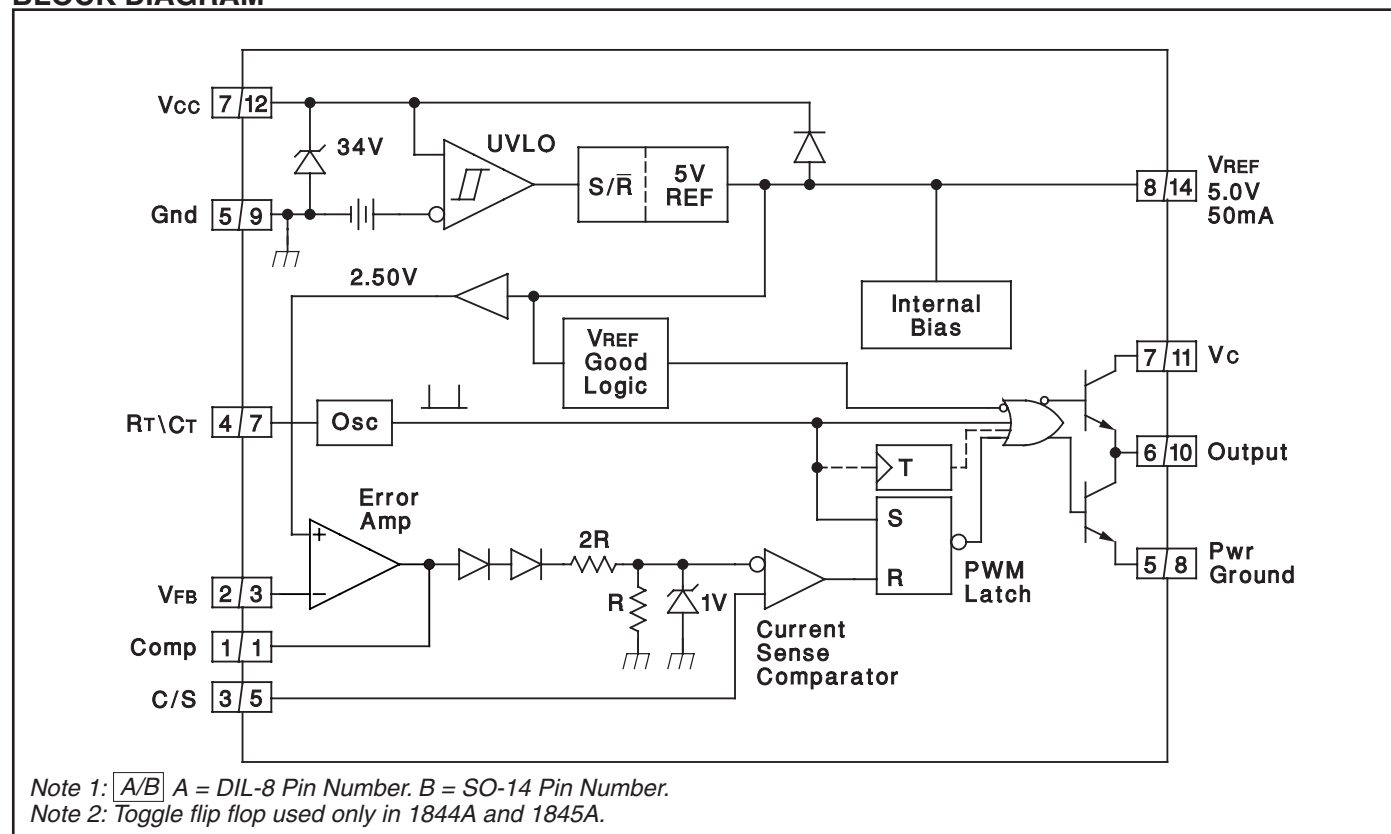

## CONNECTION DIAGRAMS

UC1842A/3A/4A/5A  
UC2842A/3A/4A/5A  
UC3842A/3A/4A/5A


### ABSOLUTE MAXIMUM RATINGS (Note 1)

Supply Voltage (Low Impedance Source) . . . . . 30V  
Supply Voltage (I<sub>CC</sub> mA) . . . . . Self Limiting  
Output Current. . . . . ±1A  
Output Energy (Capacitive Load). . . . . 5μJ  
Analog Inputs (Pins 2, 3). . . . . -0.3V to +6.3V  
Error Amp Output Sink Current . . . . . 10mA  
Power Dissipation at T<sub>A</sub> ≤ 25°C (DIL-8) . . . . . 1W  
Storage Temperature Range. . . . . -65°C to +150°C  
Lead Temperature (Soldering, 10 Seconds) . . . . . 300°C

*Note 1. All voltages are with respect to Ground, Pin 5. Currents are positive into, negative out of the specified terminal. Consult Packaging Section of Databook for thermal limitations and considerations of packages. Pin numbers refer to DIL package only.*


### SOIC-14 (TOP VIEW)

#### D Package

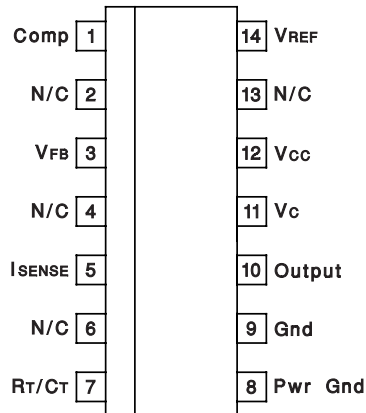


### SOIC-WIDE16 (TOP VIEW)

#### DW Package

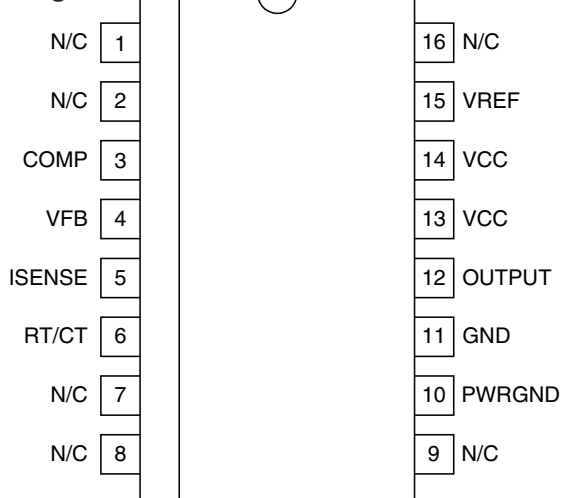


### PLCC-20, LCC-20 (TOP VIEW) Q, L Packages



| PACKAGE PIN FUNCTION           |     |
|--------------------------------|-----|
| FUNCTION                       | PIN |
| N/C                            | 1   |
| Comp                           | 2   |
| N/C                            | 3-4 |
| VFB                            | 5   |
| N/C                            | 6   |
| ISENSE                         | 7   |
| N/C                            | 8-9 |
| R <sub>T</sub> /C <sub>T</sub> | 10  |
| N/C                            | 11  |
| Pwr Gnd                        | 12  |
| Gnd                            | 13  |
| N/C                            | 14  |
| Output                         | 15  |
| N/C                            | 16  |
| V <sub>c</sub>                 | 17  |
| V <sub>CC</sub>                | 18  |
| N/C                            | 19  |
| VREF                           | 20  |

### DIL-8, SOIC-8 (TOP VIEW) J or N, D8 Package

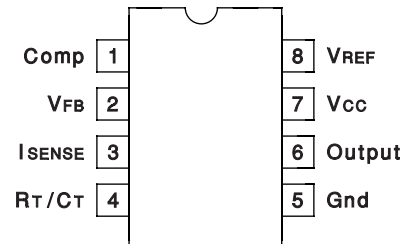

**ELECTRICAL CHARACTERISTICS** Unless otherwise stated, these specifications apply for  $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$  for the UC184xA;  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$  for the UC284xAQ;  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  for the UC284xA;  $0 \leq T_A \leq 70^{\circ}\text{C}$  for the UC384xA;  $V_{CC} = 15\text{V}$  (Note 5);  $R_T = 10\text{k}$ ;  $C_T = 3.3\text{nF}$ ;  $T_A = T_J$ ; Pin numbers refer to DIL-8.

| PARAMETER              | TEST CONDITIONS                        | UC184xA\UC284xA |      |      | UC384xA |      |      | UNITS |
|------------------------|----------------------------------------|-----------------|------|------|---------|------|------|-------|
|                        |                                        | MIN.            | TYP. | MAX. | MIN.    | TYP. | MAX. |       |
| Reference Section      |                                        |                 |      |      |         |      |      |       |
| Output Voltage         | TJ = 25°C, IO = 1mA                    | 4.95            | 5.00 | 5.05 | 4.90    | 5.00 | 5.10 | V     |
| Line Regulation        | 12 ≤ VIN 25V                           |                 | 6    | 20   |         | 6    | 20   | mV    |
| Load Regulation        | 1 ≤ IO ≤ 20mA                          |                 | 6    | 25   |         | 6    | 25   | mV    |
| Temp. Stability        | (Note 2, Note 7)                       |                 | 0.2  | 0.4  |         | 0.2  | 0.4  | mV/°C |
| Total Output Variation | Line, Load, Temp.                      | 4.9             |      | 5.1  | 4.82    |      | 5.18 | V     |
| Output Noise Voltage   | 10Hz ≤ f ≤ 10kHz<br>TJ = 25°C (Note 2) |                 | 50   |      |         | 50   |      | μV    |
| Long Term Stability    | TA = 125°C, 1000Hrs. (Note 2)          |                 | 5    | 25   |         | 5    | 25   | mV    |
| Output Short Circuit   |                                        | -30             | -100 | -180 | -30     | -100 | -180 | mA    |
| Oscillator Section     |                                        |                 |      |      |         |      |      |       |
| Initial Accuracy       | TJ = 25°C (Note 6)                     | 47              | 52   | 57   | 47      | 52   | 57   | kHz   |
| Voltage Stability      | 12 ≤ VCC ≤ 25V                         |                 | 0.2  | 1    |         | 0.2  | 1    | %     |
| Temp. Stability        | TMIN ≤ TA ≤ TMAX (Note 2)              |                 | 5    |      |         | 5    |      | %     |
| Amplitude              | VPIN 4 peak to peak (Note 2)           |                 | 1.7  |      |         | 1.7  |      | V     |
| Discharge Current      | TJ = 25°C, VPIN 4 = 2V (Note 8)        | 7.8             | 8.3  | 8.8  | 7.8     | 8.3  | 8.8  | mA    |
|                        | VPIN 4 = 2V (Note 8)                   | 7.5             |      | 8.8  | 7.6     |      | 8.8  | mA    |
| Error Amp Section      |                                        |                 |      |      |         |      |      |       |
| Input Voltage          | VPIN 1 = 2.5V                          | 2.45            | 2.50 | 2.55 | 2.42    | 2.50 | 2.58 | V     |
| Input Bias Current     |                                        |                 | -0.3 | -1   |         | -0.3 | -2   | μA    |
| AVOL                   | 2 ≤ VO ≤ 4V                            | 65              | 90   |      | 65      | 90   |      | dB    |
| Unity Gain Bandwidth   | TJ = 25°C (Note 2)                     | 0.7             | 1    |      | 0.7     | 1    |      | MHz   |
| PSRR                   | 12 ≤ VCC ≤ 25V                         | 60              | 70   |      | 60      | 70   |      | dB    |
| Output Sink Current    | VPIN 2 = 2.7V, VPIN 1 = 1.1V           | 2               | 6    |      | 2       | 6    |      | mA    |
| Output Source Current  | VPIN 2 = 2.3V, VPIN 1 = 5V             | -0.5            | -0.8 |      | -0.5    | -0.8 |      | mA    |
| VOUT High              | VPIN 2 = 2.3V, RL = 15k to ground      | 5               | 6    |      | 5       | 6    |      | V     |
| VOUT Low               | VPIN 2 = 2.7V, RL = 15k to Pin 8       |                 | 0.7  | 1.1  |         | 0.7  | 1.1  | V     |
| Current Sense Section  |                                        |                 |      |      |         |      |      |       |
| Gain                   | (Note 3, Note 4)                       | 2.85            | 3    | 3.15 | 2.85    | 3    | 3.15 | V/V   |
| Maximum Input Signal   | VPIN 1 = 5V (Note 3)                   | 0.9             | 1    | 1.1  | 0.9     | 1    | 1.1  | V     |
| PSRR                   | 12 ≤ VCC ≤ 25V (Note 3)                |                 | 70   |      |         | 70   |      | dB    |
| Input Bias Current     |                                        |                 | -2   | -10  |         | -2   | -10  | μA    |
| Delay to Output        | VPIN 3 = 0 to 2V (Note 2)              |                 | 150  | 300  |         | 150  | 300  | ns    |
| Output Section         |                                        |                 |      |      |         |      |      |       |
| Output Low Level       | ISINK = 20mA                           |                 | 0.1  | 0.4  |         | 0.1  | 0.4  | V     |
|                        | ISINK = 200mA                          |                 | 15   | 2.2  |         | 15   | 2.2  | V     |
| Output High Level      | ISOURCE = 20mA                         | 13              | 13.5 |      | 13      | 13.5 |      | V     |
|                        | ISOURCE = 200mA                        | 12              | 13.5 |      | 12      | 13.5 |      | V     |
| Rise Time              | TJ = 25°C, CL = 1nF (Note 2)           |                 | 50   | 150  |         | 50   | 150  | ns    |
| Fall Time              | TJ = 25°C, CL = 1nF (Note 2)           |                 | 50   | 150  |         | 50   | 150  | ns    |
| UVLO Saturation        | VCC = 5V, ISINK = 10mA                 |                 | 0.7  | 1.2  |         | 0.7  | 1.2  | V     |

**ELECTRICAL CHARACTERISTICS** Unless otherwise stated, these specifications apply for  $-55^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$  for the UC184xA;  $-40^{\circ}\text{C} \leq T_A \leq 125^{\circ}\text{C}$  for the UC284xAQ;  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  for the UC284xA;  $0 \leq T_A \leq 70^{\circ}\text{C}$  for the UC384xA;  $V_{CC} = 15\text{V}$  (Note 5);  $R_T = 10\text{k}\Omega$ ;  $C_T = 3.3\text{nF}$ ;  $T_A = T_J$ ; Pin numbers refer to DIL-8.

| PARAMETER                            | TEST CONDITIONS                              | UC184xA\UC284xA |      |      | UC384xA |      |      | UNITS |
|--------------------------------------|----------------------------------------------|-----------------|------|------|---------|------|------|-------|
|                                      |                                              | MIN.            | TYP. | MAX. | MIN.    | TYP. | MAX. |       |
| Under-Voltage Lockout Section        |                                              |                 |      |      |         |      |      |       |
| Start Threshold                      | x842A/4A                                     | 15              | 16   | 17   | 14.5    | 16   | 17.5 | V     |
|                                      | x843A/5A                                     | 7.8             | 8.4  | 9.0  | 7.8     | 8.4  | 9.0  | V     |
| Min. Operation Voltage After Turn On | x842A/4A                                     | 9               | 10   | 11   | 8.5     | 10   | 11.5 | V     |
|                                      | x843A/5A                                     | 7.0             | 7.6  | 8.2  | 7.0     | 7.6  | 8.2  | V     |
| PWM Section                          |                                              |                 |      |      |         |      |      |       |
| Maximum Duty Cycle                   | x842A/3A                                     | 94              | 96   | 100  | 94      | 96   | 100  | %     |
|                                      | x844A/5A                                     | 47              | 48   | 50   | 47      | 48   | 50   | %     |
| Minimum Duty Cycle                   |                                              |                 |      | 0    |         |      | 0    | %     |
| Total Standby Current                |                                              |                 |      |      |         |      |      |       |
| Start-Up Current                     |                                              |                 | 0.3  | 0.5  |         | 0.3  | 0.5  | mA    |
| Operating Supply Current             | V <sub>PIN 2</sub> = V <sub>PIN 3</sub> = 0V |                 | 11   | 17   |         | 11   | 17   | mA    |
| V <sub>CC</sub> Zener Voltage        | I <sub>CC</sub> = 25mA                       | 30              | 34   |      | 30      | 34   |      | V     |

**Note 2:** Ensured by design, but not 100% production tested.

**Note 3:** Parameter measured at trip point of latch with  $V_{PIN2} = 0$ .

**Note 4:** Gain defined as:  $A = \frac{\Delta V_{PIN1}}{\Delta V_{PIN3}}$ ;  $0 \leq V_{PIN3} \leq 0.8\text{V}$ .

**Note 5:** Adjust Vcc above the start threshold before setting at 15V.


**Note 6:** Output frequency equals oscillator frequency for the UC1842A and UC1843A. Output frequency is one half oscillator frequency for the UC1844A and UC1845A.

**Note 7:** "Temperature stability, sometimes referred to as average temperature coefficient, is described by the equation:

$$\text{Temp Stability} = \frac{V_{REF}(\text{max}) - V_{REF}(\text{min})}{T_J(\text{max}) - T_J(\text{min})}. V_{REF}(\text{max}) \text{ and } V_{REF}(\text{min}) \text{ are the maximum \& minimum reference voltage measured over the appropriate temperature range. Note that the extremes in voltage do not necessarily occur at the extremes in temperature.}"$$


**Note 8:** This parameter is measured with  $R_T = 10\text{k}\Omega$  to  $V_{REF}$ . This contributes approximately  $300\mu\text{A}$  of current to the measurement. The total current flowing into the  $R_T/C$  pin will be approximately  $300\mu\text{A}$  higher than the measured value.

## Error Amp Configuration

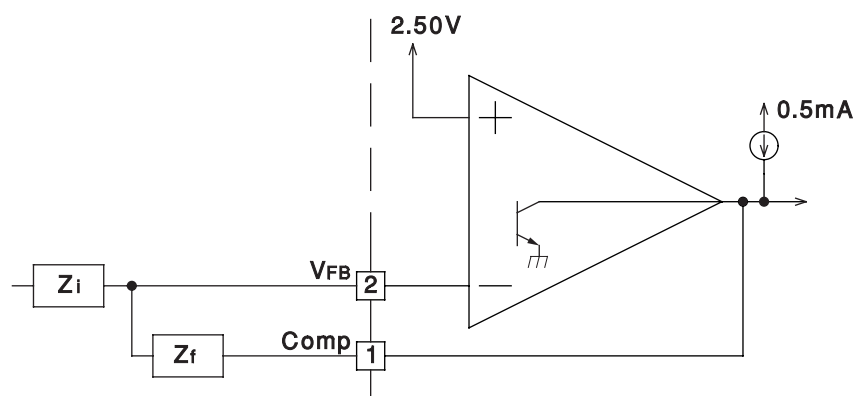


Error Amp can Source and Sink up to 0.5mA, and Sink up to 2mA.


## Under-Voltage Lockout

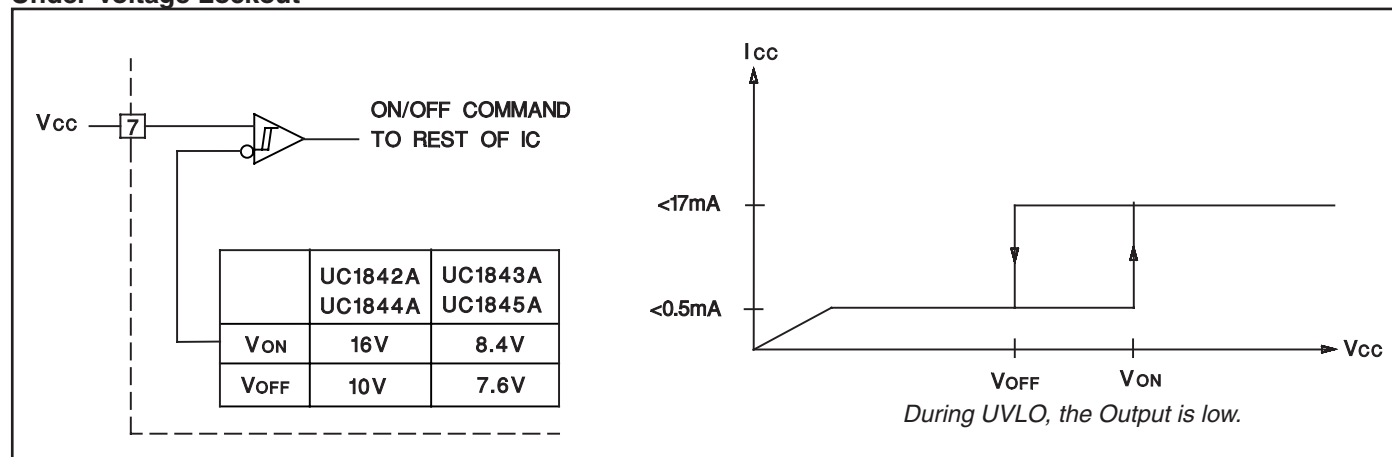


## Current Sense Circuit

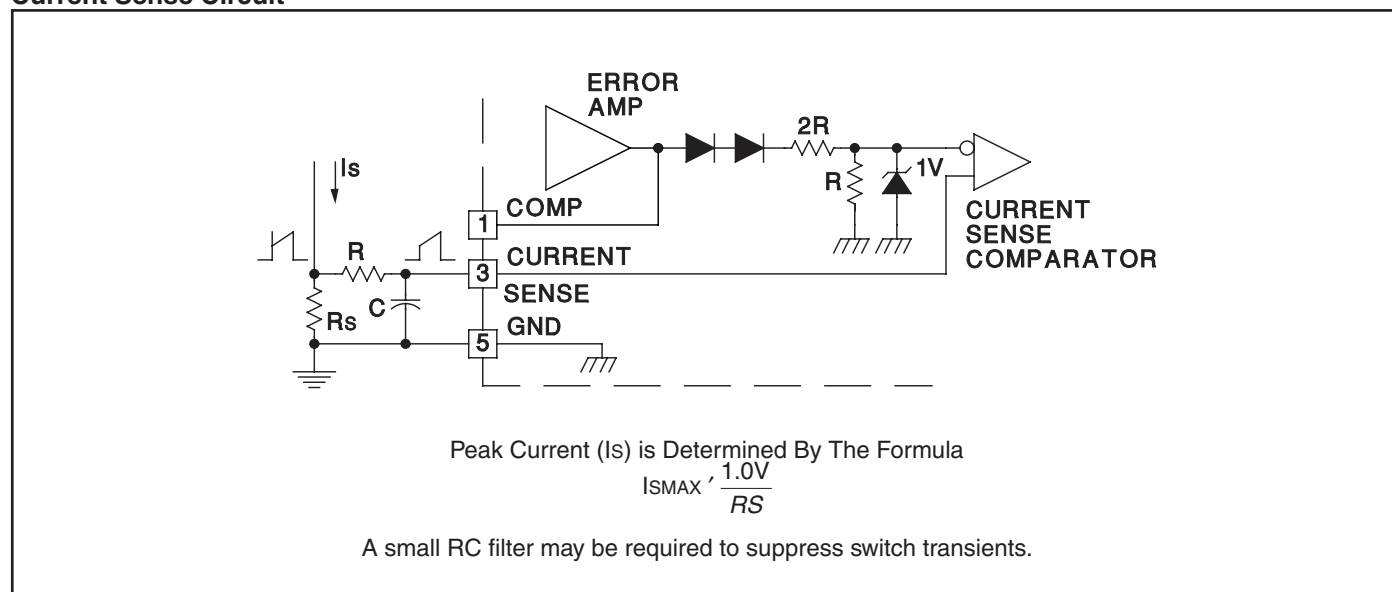

## Output Saturation Characteristics

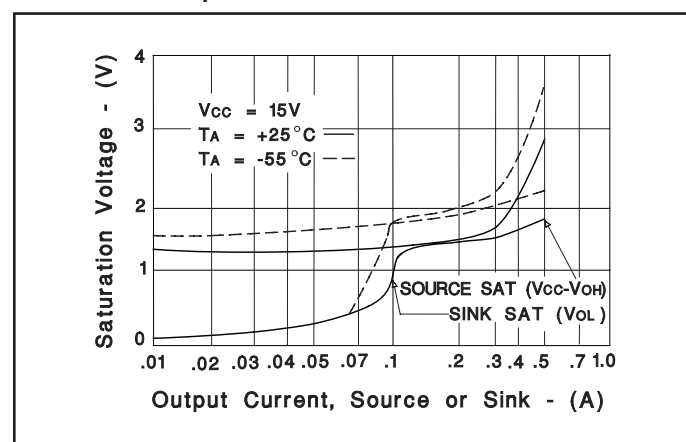


## Error Amplifier Open-Loop Frequency Response

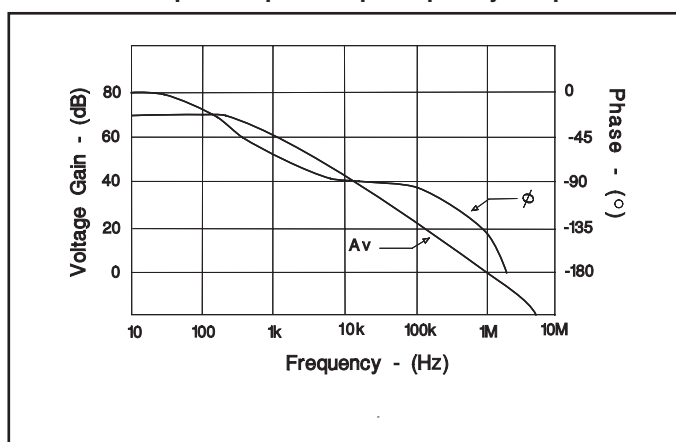


## APPLICATIONS DATA (cont.)


### Oscillator Section

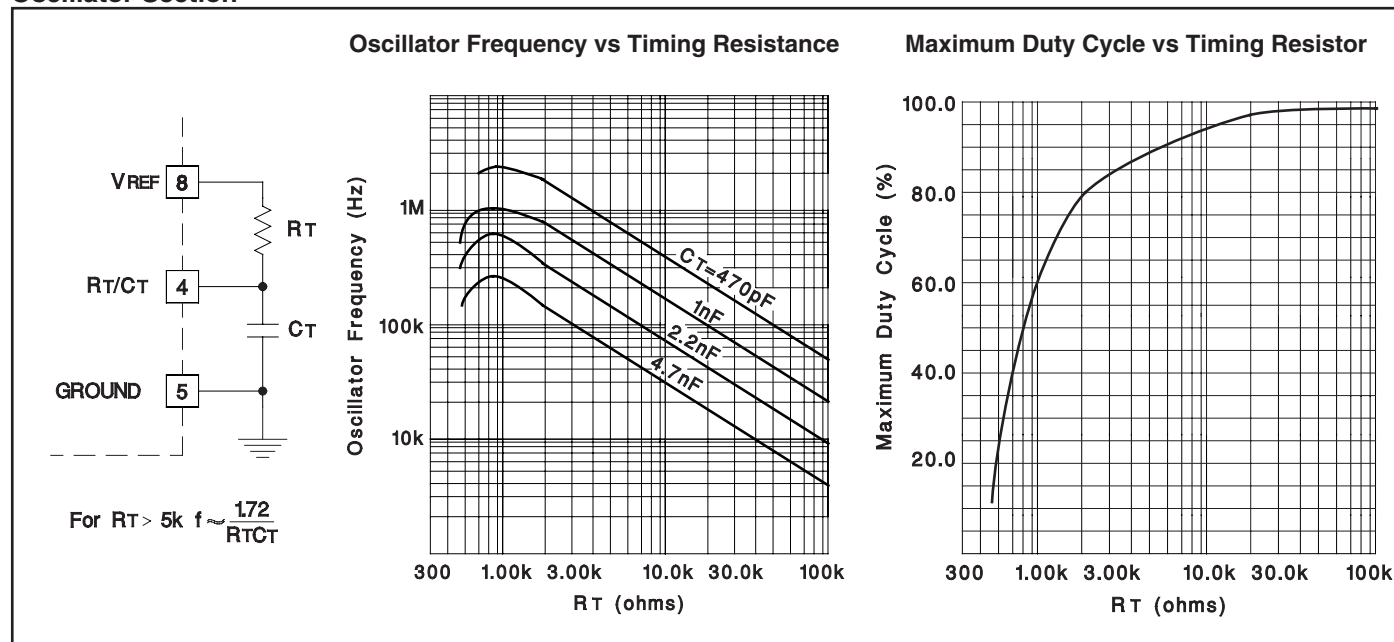

### Open-Loop Laboratory Test Fixture

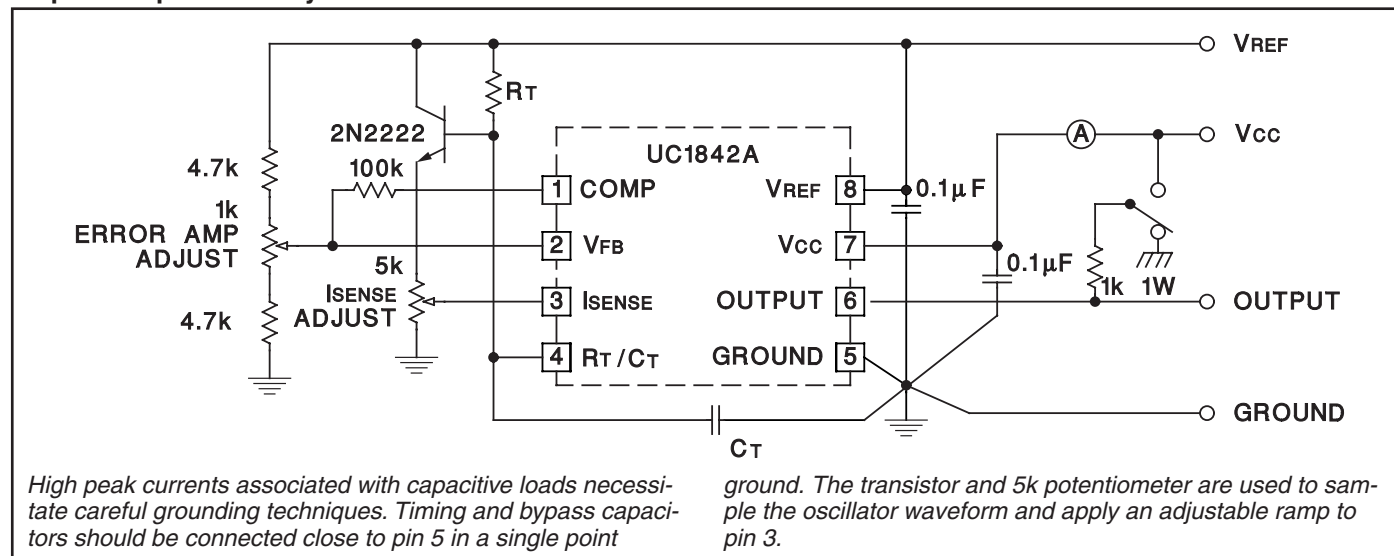


### Slope Compensation

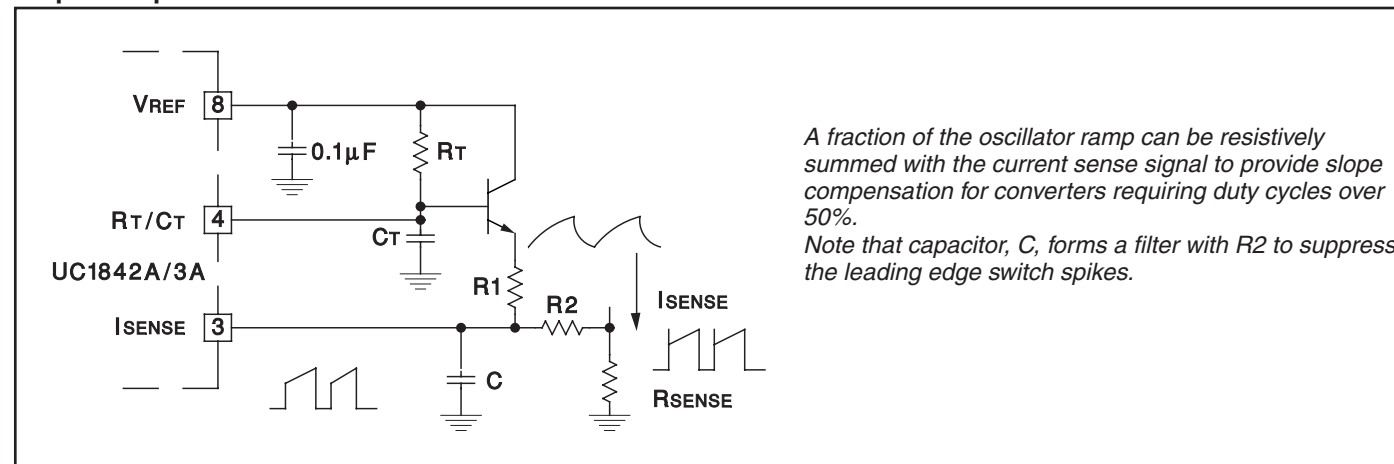

## APPLICATIONS DATA (cont.)

### Off-line Flyback Regulator

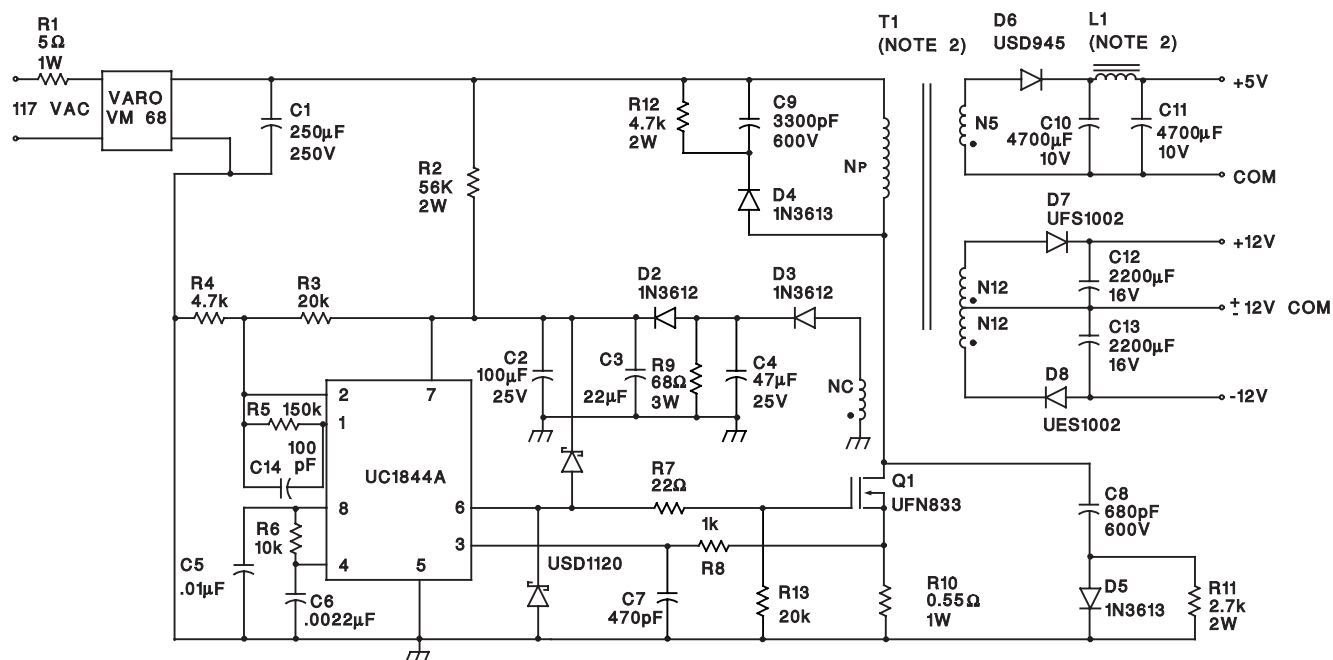

#### Power Supply Specifications

- |                         |                                |
|-------------------------|--------------------------------|
| 1. Input Voltage        | 95VAC to 130VA<br>(50 Hz/60Hz) |
| 2. Line Isolation       | 3750V                          |
| 3. Switching Frequency  | 40kHz                          |
| 4. Efficiency Full Load | 70%                            |

#### 5. Output Voltage:

- |                                 |                               |
|---------------------------------|-------------------------------|
| A. +5V, ±5%; 1A to 4A load      | Ripple voltage: 50mV P-P Max  |
| B. +12V, ±3%; 0.1A to 0.3A load | Ripple voltage: 100mV P-P Max |
| C. -12V, ±3%; 0.1A to 0.3A load | Ripple voltage: 100mV P-P Max |

## **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Mailing Address:

Texas Instruments  
Post Office Box 655303  
Dallas, Texas 75265