

VN2222LL

Preferred Device

Small Signal MOSFET 150 mAmps, 60 Volts

N-Channel TO-92

Features

- Pb-Free Packages are Available*

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	60	Vdc
Drain-Gate Voltage ($R_{GS} = 1.0 \text{ M}\Omega$)	V_{DGR}	60	Vdc
Gate-Source Voltage	V_{GS}	± 20	Vdc
- Continuous	V_{GSM}	± 40	Vpk
- Non-repetitive ($t_p \leq 50 \mu\text{s}$)			
Drain Current	I_D	150	mAdc
- Continuous	I_{DM}	1000	
- Pulsed			
Total Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	400 3.2	mW mW/ $^\circ\text{C}$
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to $+150$	$^\circ\text{C}$

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	312.5	$^\circ\text{C/W}$
Maximum Lead Temperature for Soldering Purposes, 1/16" from case for 10 seconds	T_L	300	$^\circ\text{C}$



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



ON Semiconductor®


<http://onsemi.com>

150 mA, 60 V
 $R_{DS(on)} = 7.5 \Omega$



TO-92
CASE 29
STYLE 22

MARKING DIAGRAM & PIN ASSIGNMENT



A = Assembly Location
Y = Year
WW = Work Week

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

Preferred devices are recommended choices for future use and best overall value.

VN2222LL

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Drain-Source Breakdown Voltage (V _{GS} = 0, I _D = 100 μ Adc)	V _{(BR)DSS}	60	–	Vdc
Zero Gate Voltage Drain Current (V _{DS} = 48 Vdc, V _{GS} = 0) (V _{DS} = 48 Vdc, V _{GS} = 0, T _J = 125°C)	I _{DSS}	–	10 500	μ Adc
Gate-Body Leakage Current, Forward (V _{GSS} = 30 Vdc, V _{DS} = 0)	I _{GSSF}	–	–100	nAdc

ON CHARACTERISTICS (Note 1)

Gate Threshold Voltage (V _{DS} = V _{GS} , I _D = 1.0 mAdc)	V _{GS(th)}	0.6	2.5	Vdc
Static Drain-Source On-Resistance (V _{GS} = 10 Vdc, I _D = 0.5 Adc) (V _{GS} = 10 Vdc, I _D = 0.5 Vdc, T _C = 125°C)	r _{DS(on)}	–	7.5 13.5	Ω
Drain-Source On-Voltage (V _{GS} = 5.0 Vdc, I _D = 200 mAdc) (V _{GS} = 10 Vdc, I _D = 500 mAdc)	V _{DS(on)}	–	1.5 3.75	Vdc
On-State Drain Current (V _{GS} = 10 Vdc, V _{DS} $\geq$ 2.0 V _{DS(on)})	I _{D(on)}	750	–	mA
Forward Transconductance (V _{DS} = 10 Vdc, I _D = 500 mAdc)	g _{fs}	100	–	μ mos

DYNAMIC CHARACTERISTICS

Input Capacitance	(V _{DS} = 25 Vdc, V _{GS} = 0, f = 1.0 MHz)	C _{iss}	–	60	pF
Output Capacitance		C _{oss}	–	25	
Reverse Transfer Capacitance		C _{rss}	–	5.0	

SWITCHING CHARACTERISTICS (Note 1)

Turn-On Delay Time	(V _{DD} = 15 Vdc, I _D = 600 mA, R _{gen} = 25 Ω , R _L = 23 Ω)	t _{on}	–	10	ns
Turn-Off Delay Time		t _{off}	–	10	

1. Pulse Test: Pulse Width $\leq$ 300 μ s, Duty Cycle $\leq$ 2.0%.

ORDERING INFORMATION

Device	Package	Shipping [†]
VN2222LL	TO-92	1000 Unit / Box
VN2222LLG	TO-92 (Pb-Free)	1000 Unit / Box
VN2222LLRL	TO-92	1000 Unit / Box
VN2222LLRLRA	TO-92	2000 Tape & Reel
VN2222LLRLRAG	TO-92 (Pb-Free)	2000 Tape & Reel
VN2222LLRLRM	TO-92	2000 Unit / Ammo Box

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

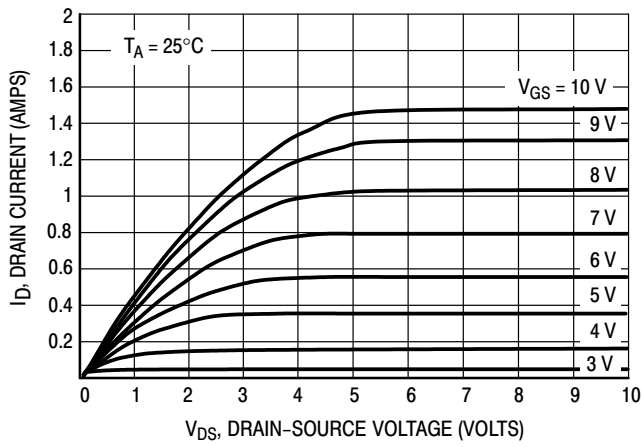


Figure 1. Ohmic Region

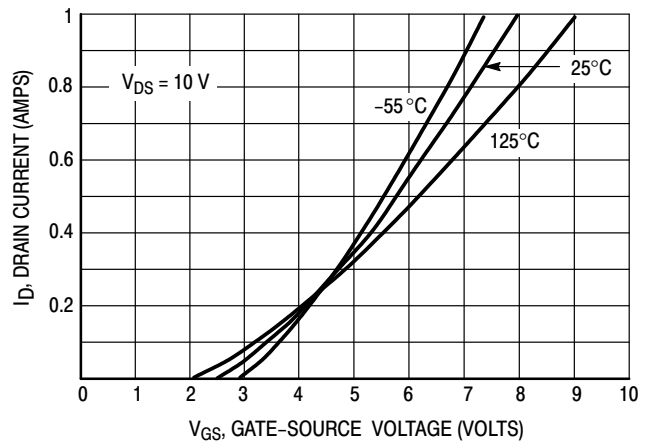


Figure 2. Transfer Characteristics

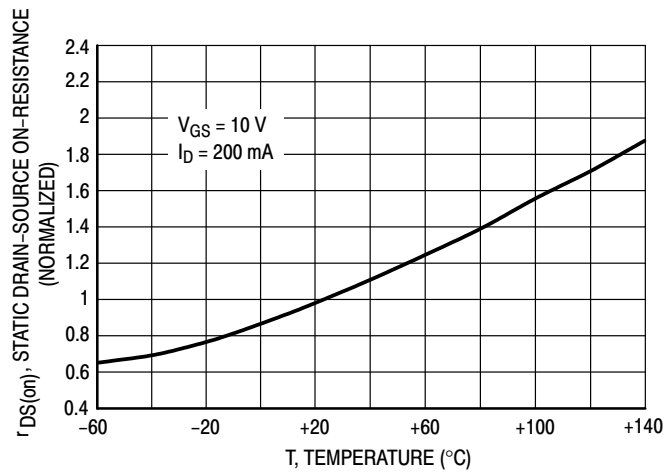


Figure 3. Temperature versus Static Drain-Source On-Resistance



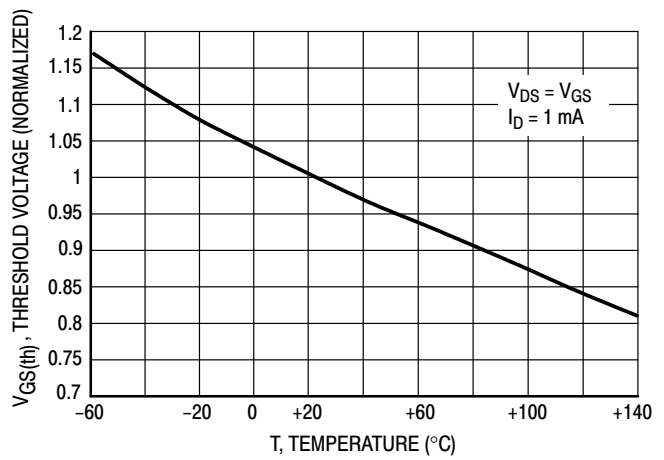


Figure 4. Temperature versus Gate Threshold Voltage

VN2222LL

PACKAGE DIMENSIONS

TO-92
CASE 29-11
ISSUE AL

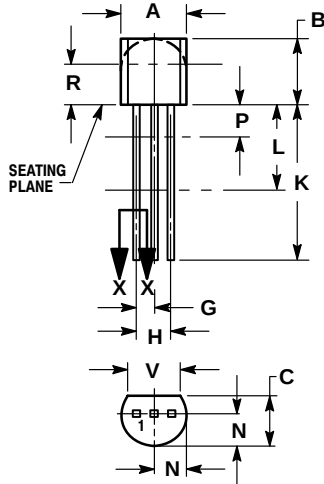

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.021	0.407	0.533
E	0.045	0.055	1.15	1.39
F	0.095	0.105	2.42	2.66
G	0.015	0.020	0.39	0.50
H	0.500	---	12.70	---
I	0.250	---	6.35	---
J	0.080	0.105	2.04	2.66
K	---	0.100	---	2.54
L	0.115	---	2.93	---
M	0.135	---	3.43	---

STYLE 22:

1. SOURCE
2. GATE
3. DRAIN

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85062-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.