



FR201G THRU FR207G

GLASS PASSIVATED JUNCTION FAST SWITCHING RECTIFIER


Reverse Voltage - 50 to 1000 Volts

Forward Current - 2.0 Amperes

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame retardant epoxy molding compound
- Glass passivated junction in DO-15 package
- 2.0 ampere operation at $T_A = 75^\circ\text{C}$ with no thermal runaway
- Fast switching for high efficiency

DO-15

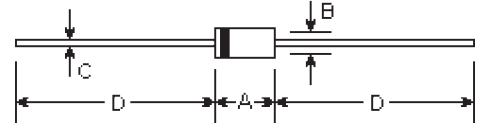

Mechanical Data

- **Case:** Molded plastic, DO-15
- **Terminals:** Axial leads, solderable per MIL-STD-202, method 208
- **Polarity:** Band denotes cathode
- **Mounting Position:** Any
- **Weight:** 0.014 ounce, 0.395 gram

DIMENSIONS					
DIM	inches		mm		Note
	Min.	Max.	Min.	Max.	
A	0.228	0.299	5.8	7.6	
B	0.102	0.142	2.6	3.6	φ
C	0.028	0.034	0.71	0.86	φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics @25°C unless otherwise specified


	Symbols	FR 201G	FR 202G	FR 203G	FR 204G	FR 205G	FR 206G	FR 207G	Units
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Average forward rectified current at T _A =75℃	I _(AV)	2.0							Amps
Peak forward surge current 8.3mS single half sine-wave	I _{FSM}	70.0							Amps
Maximum instantaneous forward voltage I _{FM} =2.0A; T _A =25℃ (Note 1)	V _F	1.3							Volts
Maximum DC reverse current at rated DC blocking voltage T _A =25℃ T _A =100℃	I _R	5.0 100.0							μ A
Maximum reverse recovery time at I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	T _{rr}	150				250	500		nS
Typical junction capacitance Measured at 1.0MHz, V _R =4.0V	C _J	40							p F
Operating and storage temperature range	T _J , T _{STG}	-65 to +150							℃

Note:

(1) Pulse test: Pulse width 300μSec, Duty cycle 1%


RATINGS AND CHARACTERISTIC CURVES

Figure 1
Typical Forward Characteristics

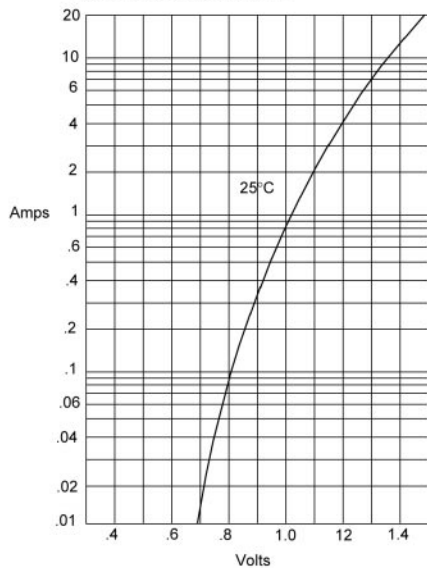


Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

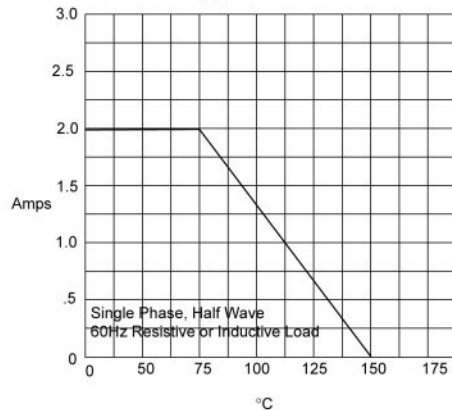

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C

Figure 3
Junction Capacitance

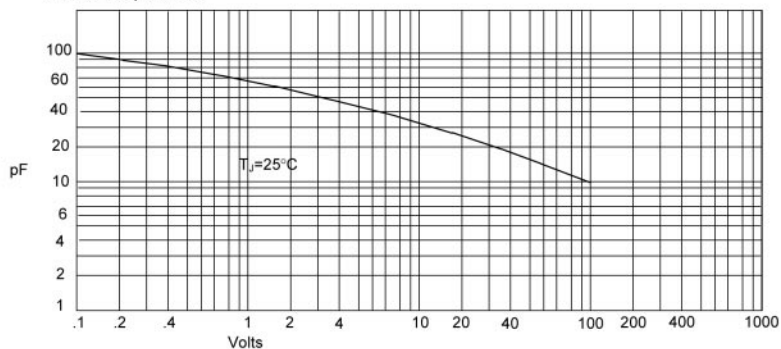

Junction Capacitance - pF *versus*
Reverse Voltage - Volts

RATINGS AND CHARACTERISTIC CURVES


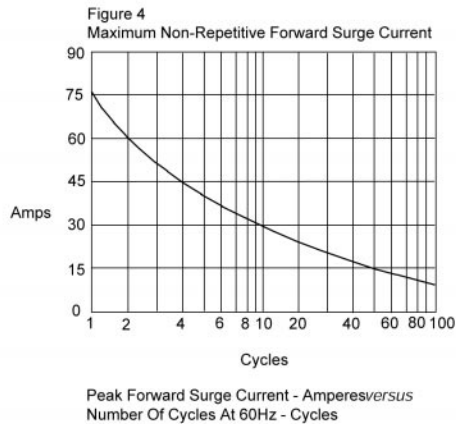


Figure 5
Reverse Recovery Time Characteristic And Test Circuit Diagram



- Notes:
1. Rise Time = 7ns max.
Input impedance = 1 megohm, 22pF
 2. Rise Time = 10ns max.
Source impedance = 50 ohms
 3. Resistors are non-inductive

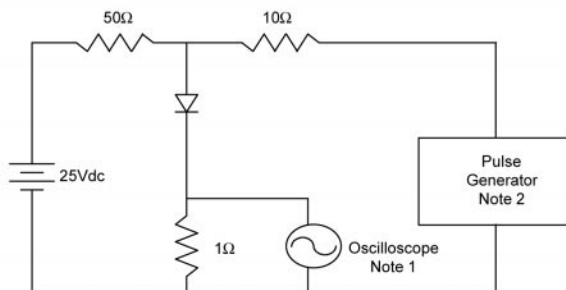