Order this document
by BC546/D

Amplifier Transistors

NPN Silicon

BC546, B
BC547, A, B, C
BC548, A, B, C





CASE 29–04, STYLE 17
TO–92 (TO–226AA)

MAXIMUM RATINGS

Rating	Symbol	BC 546	BC 547	BC 548	Unit
Collector–Emitter Voltage	V_{CEO}	65	45	30	Vdc
Collector–Base Voltage	V_{CBO}	80	50	30	Vdc
Emitter–Base Voltage	V_{EBO}	6.0			Vdc
Collector Current — Continuous	I_C	100			mAdc
Total Device Dissipation @ T_A = 25°C Derate above 25°C	P_D	625 5.0			mW mW/°C
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	1.5 12			Watt mW/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	–55 to +150			°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	°C/W
Thermal Resistance, Junction to Case	$R_{\theta JC}$	83.3	°C/W

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS						
Collector–Emitter Breakdown Voltage (I_C = 1.0 mA, I_B = 0)	BC546 BC547 BC548	$V_{(BR)CEO}$	65 45 30	— — —	— — —	V
Collector–Base Breakdown Voltage (I_C = 100 μAdc)	BC546 BC547 BC548	$V_{(BR)CBO}$	80 50 30	— — —	— — —	V
Emitter–Base Breakdown Voltage (I_E = 10 μA, I_C = 0)	BC546 BC547 BC548	$V_{(BR)EBO}$	6.0 6.0 6.0	— — —	— — —	V
Collector Cutoff Current		I_{CES}				
(V_{CE} = 70 V, V_{BE} = 0)	BC546		—	0.2	15	nA
(V_{CE} = 50 V, V_{BE} = 0)	BC547		—	0.2	15	
(V_{CE} = 35 V, V_{BE} = 0)	BC548		—	0.2	15	
(V_{CE} = 30 V, T_A = 125°C)	BC546/547/548		—	—	4.0	μA

REV 1

© Motorola, Inc. 1996

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted) (Continued)

Characteristic		Symbol	Min	Typ	Max	Unit
ON CHARACTERISTICS						
DC Current Gain		h_{FE}				—
(I_C = 10 μA, V_{CE} = 5.0 V)	BC547A/548A		—	90	—	
	BC546B/547B/548B		—	150	—	
	BC548C		—	270	—	
(I_C = 2.0 mA, V_{CE} = 5.0 V)	BC546		110	—	450	
	BC547		110	—	800	
	BC548		110	—	800	
	BC547A/548A		110	180	220	
	BC546B/547B/548B		200	290	450	
	BC547C/BC548C		420	520	800	
(I_C = 100 mA, V_{CE} = 5.0 V)	BC547A/548A		—	120	—	
	BC546B/547B/548B		—	180	—	
	BC548C		—	300	—	
Collector–Emitter Saturation Voltage		$V_{CE(sat)}$				V
(I_C = 10 mA, I_B = 0.5 mA)			—	0.09	0.25	
(I_C = 100 mA, I_B = 5.0 mA)			—	0.2	0.6	
(I_C = 10 mA, I_B = See Note 1)			—	0.3	0.6	
Base–Emitter Saturation Voltage		$V_{BE(sat)}$	—	0.7	—	V
(I_C = 10 mA, I_B = 0.5 mA)						
Base–Emitter On Voltage		$V_{BE(on)}$				V
(I_C = 2.0 mA, V_{CE} = 5.0 V)			0.55	—	0.7	
(I_C = 10 mA, V_{CE} = 5.0 V)			—	—	0.77	
SMALL–SIGNAL CHARACTERISTICS						
Current–Gain — Bandwidth Product		f_T				MHz
(I_C = 10 mA, V_{CE} = 5.0 V, f = 100 MHz)	BC546		150	300	—	
	BC547		150	300	—	
	BC548		150	300	—	
Output Capacitance		C_{obo}	—	1.7	4.5	pF
(V_{CB} = 10 V, I_C = 0, f = 1.0 MHz)						
Input Capacitance		C_{ibo}	—	10	—	pF
(V_{EB} = 0.5 V, I_C = 0, f = 1.0 MHz)						
Small–Signal Current Gain		h_{fe}				—
(I_C = 2.0 mA, V_{CE} = 5.0 V, f = 1.0 kHz)	BC546		125	—	500	
	BC547/548		125	—	900	
	BC547A/548A		125	220	260	
	BC546B/547B/548B		240	330	500	
	BC547C/548C		450	600	900	
Noise Figure		NF				dB
(I_C = 0.2 mA, V_{CE} = 5.0 V, R_S = 2 kΩ,	BC546		—	2.0	10	
f = 1.0 kHz, Δf = 200 Hz)	BC547		—	2.0	10	
	BC548		—	2.0	10	

Note 1: I_B is value for which I_C = 11 mA at V_{CE} = 1.0 V.

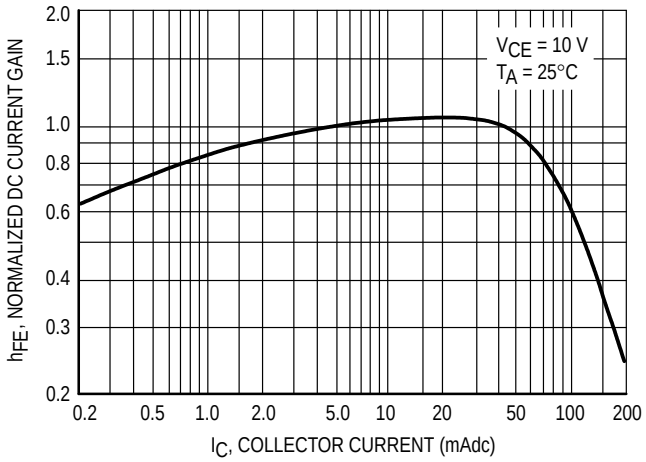

Figure 1. Normalized DC Current Gain

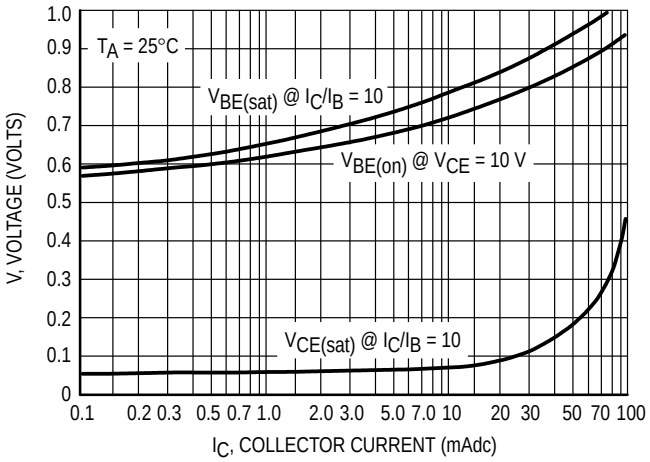

Figure 2. “Saturation” and “On” Voltages

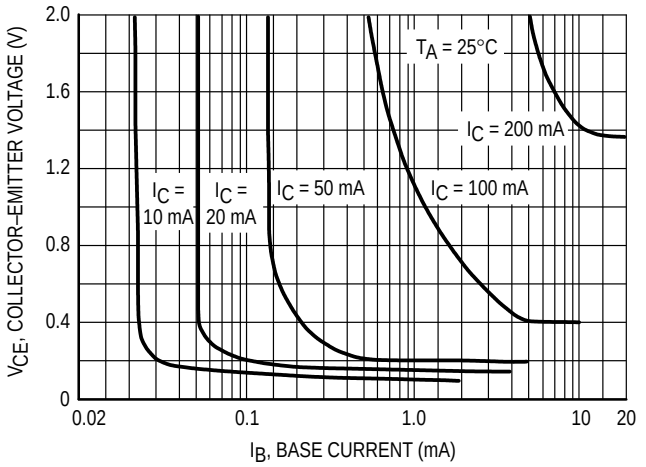

Figure 3. Collector Saturation Region

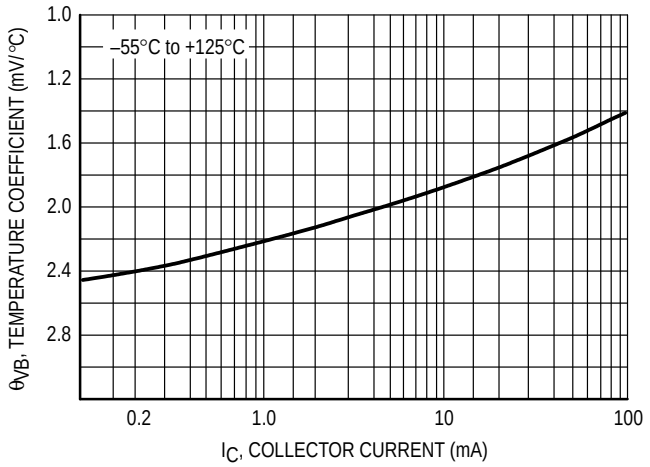

Figure 4. Base–Emitter Temperature Coefficient

BC547/BC548

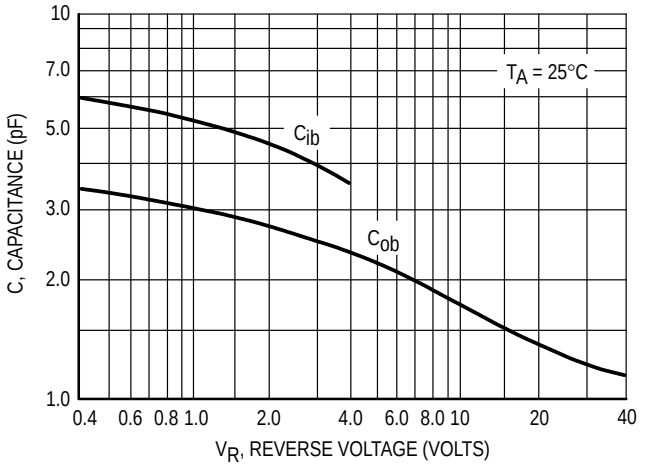

Figure 5. Capacitances

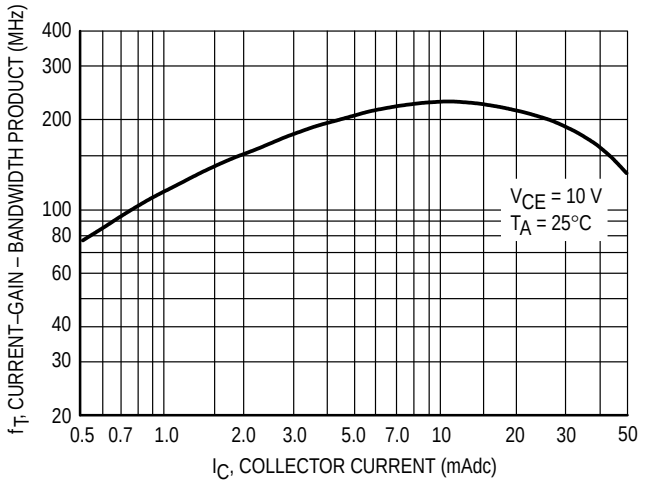

Figure 6. Current–Gain – Bandwidth Product

BC547/BC548

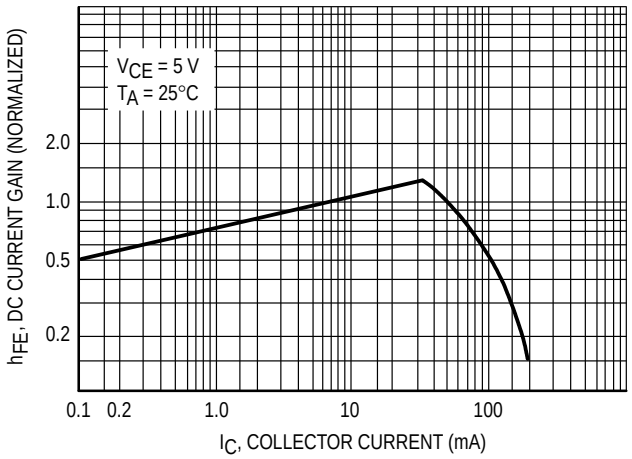

Figure 7. DC Current Gain

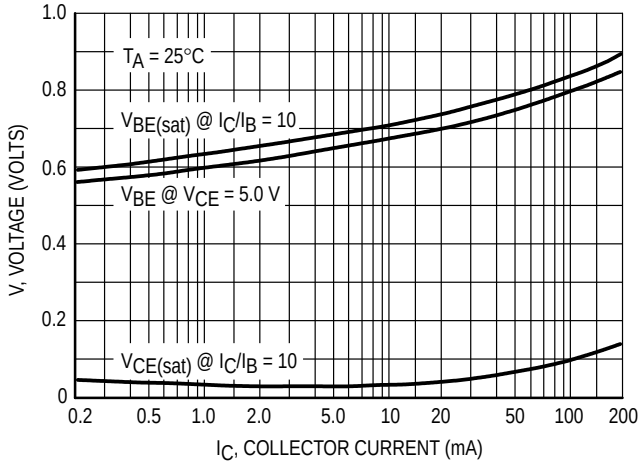

Figure 8. “On” Voltage

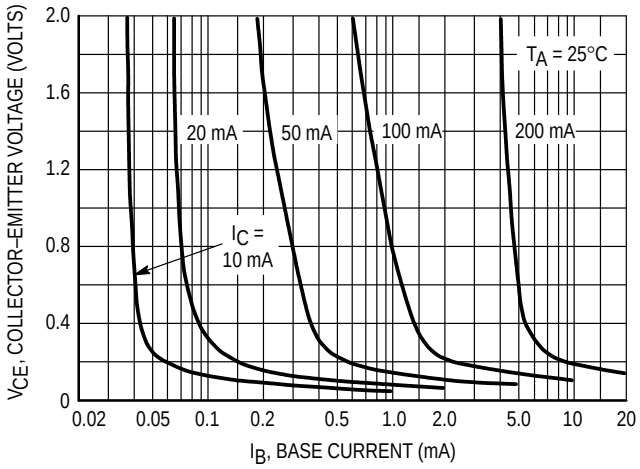

Figure 9. Collector Saturation Region

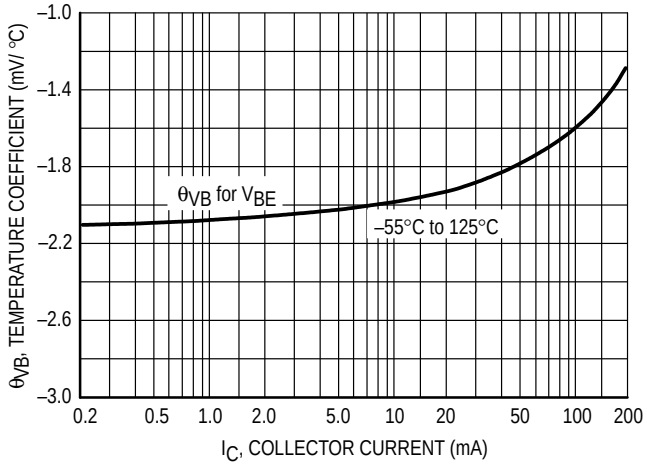

Figure 10. Base–Emitter Temperature Coefficient

BC546

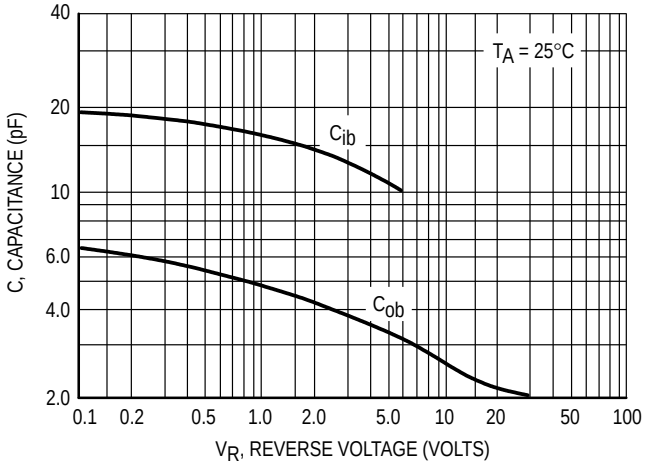

Figure 11. Capacitance

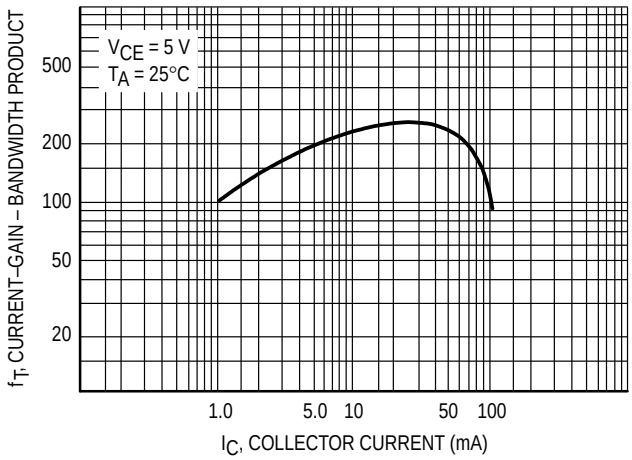

Figure 12. Current–Gain – Bandwidth Product

PACKAGE DIMENSIONS

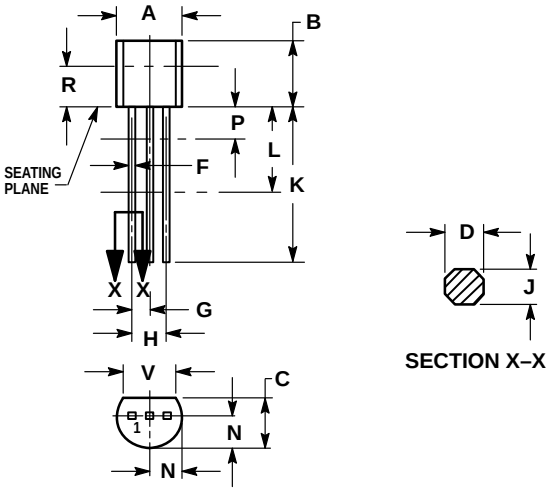

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

CASE 029–04
(TO–226AA)
ISSUE AD

STYLE 17:
PIN 1. COLLECTOR
2. BASE
3. EMITTER

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:
USA/EUROPE: Motorola Literature Distribution;
P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447

MFAX: RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244–6609
INTERNET: http://Design–NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, Toshikatsu Otsuki,
6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–3521–8315

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298