National Semiconductor

February 1988

CD4020BM/CD4020BC 14-Stage Ripple Carry Binary Counters CD4040BM/CD4040BC 12-Stage Ripple Carry Binary Counters CD4060BM/CD4060BC 14-Stage Ripple Carry Binary Counters

General Description

The CD4020BM/CD4020BC, CD4060BM/CD4060BC are 14-stage ripple carry binary counters, and the CD4040BM/CD4040BC is a 12-stage ripple carry binary counter. The counters are advanced one count on the negative transition of each clock pulse. The counters are reset to the zero state by a logical "1" at the reset input independent of clock.

Features

■ Wide supply voltage range	1.0V to 15V
■ High noise immunity	0.45 V_{DD} (typ.)
■ Low power TTL compatibility	Fan out of 2 driving 74L or 1 driving 74LS
■ Medium speed operation	8 MHz typ. at V_{DD} = 10V
■ Schmitt trigger clock input	

Connection Diagrams

Dual-In-Line Package

CD4020BM/CD4020BC

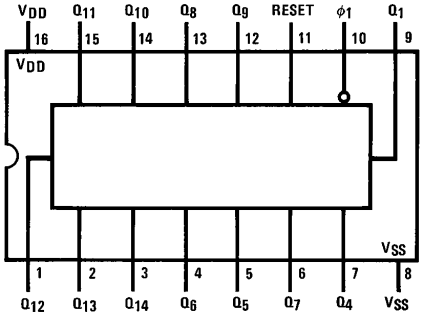

TL/F/5953–1

Top View

Order Number CD4020B, CD4040B or CD4060B

Dual-In-Line Package

CD4040BM/CD4040BC

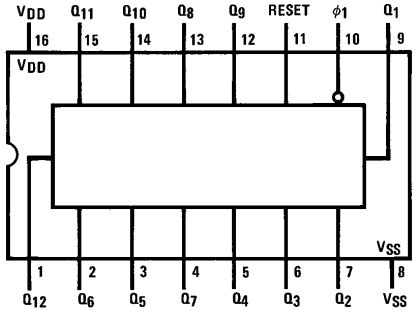

TL/F/5953–2

Top View

Dual-In-Line Package

CD4060BM/CD4060BC

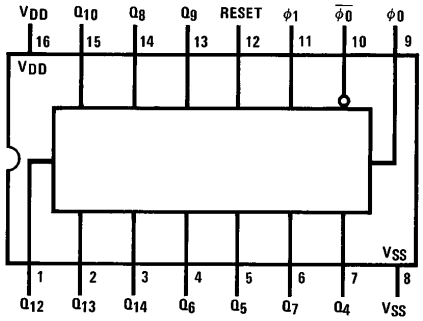

TL/F/5953–3

Top View

©1995 National Semiconductor Corporation

RRD-B30M105/Printed in U. S. A.

Absolute Maximum Ratings (Notes 1 and 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{DD})	−0.5V to +18V
Input Voltage (V_{IN})	−0.5V to V_{DD} +0.5V
Storage Temperature Range (T_S)	−65°C to +150°C
Package Dissipation (P_D)	
Dual-In-Line	700 mW
Small Outline	500 mW
Lead Temperature (T_L)	
(Soldering, 10 seconds)	260°C

Recommended Operating Conditions

Supply Voltage (V_{DD})	+3V to +15V
Input Voltage (V_{IN})	0V to V_{DD}
Operating Temperature Range (T_A)	
CD40XXBM	−55°C to +125°C
CD40XXBC	−40°C to +85°C

DC Electrical Characteristics CD40XXBM (Note 2)

Symbol	Parameter	Conditions	−55°C		+25°C			+125°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	V_{DD} = 5V, V_{IN} = V_{DD} or V_{SS}		5			5		150	μA
		V_{DD} = 10V, V_{IN} = V_{DD} or V_{SS}		10			10		300	μA
		V_{DD} = 15V, V_{IN} = V_{DD} or V_{SS}		20			20		600	μA
V_{OL}	Low Level Output Voltage	V_{DD} = 5V		0.05		0	0.05		0.05	V
		V_{DD} = 10V		0.05		0	0.05		0.05	V
		V_{DD} = 15V		0.05		0	0.05		0.05	V
V_{OH}	High Level Output Voltage	V_{DD} = 5V	4.95		4.95	5		4.95		V
		V_{DD} = 10V	9.95		9.95	10		9.95		V
		V_{DD} = 15V	14.95		14.95	15		14.95		V
V_{IL}	Low Level Input Voltage	V_{DD} = 5V, V_O = 0.5V or 4.5V		1.5		2	1.5		1.5	V
		V_{DD} = 10V, V_O = 1.0V or 9.0V		3.0		4	3.0		3.0	V
		V_{DD} = 15V, V_O = 1.5V or 13.5V		4.0		6	4.0		4.0	V
V_{IH}	High Level Input Voltage	V_{DD} = 5V, V_O = 0.5V or 4.5V	3.5		3.5	3		3.5		V
		V_{DD} = 10V, V_O = 1.0V or 9.0V	7.0		7.0	6		7.0		V
		V_{DD} = 15V, V_O = 1.5V or 13.5V	11.0		11.0	9		11.0		V
I_{OL}	Low Level Output Current	V_{DD} = 5V, V_O = 0.4V	0.64		0.51	0.88		0.36		mA
	(See Note 3)	V_{DD} = 10V, V_O = 0.5V	1.6		1.3	2.25		0.9		mA
		V_{DD} = 15V, V_O = 1.5V	4.2		3.4	8.8		2.4		mA
I_{OH}	High Level Output Current	V_{DD} = 5V, V_O = 4.6V	−0.64		−0.51	−0.88		−0.36		mA
	(See Note 3)	V_{DD} = 10V, V_O = 9.5V	−1.6		−1.3	−2.25		−0.9		mA
		V_{DD} = 15V, V_O = 13.5V	−4.2		−3.4	−8.8		−2.4		mA
I_{IN}	Input Current	V_{DD} = 15V, V_{IN} = 0V		−0.10		-10^{-5}	−0.10		−1.0	μA
		V_{DD} = 15V, V_{IN} = 15V		0.10		10^{-5}	0.10		1.0	μA

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The tables of "Recommended Operating Conditions" and "Electrical Characteristics" provide conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: Data does not apply to oscillator points ϕ_0 and $\overline{\phi_0}$ of CD4060BM/CD4060BC. I_{OH} and I_{OL} are tested one output at a time.

DC Electrical Characteristics 40XXBC (Note 2)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I_{DD}	Quiescent Device Current	V_{DD} = 5V, V_{IN} = V_{DD} or V_{SS}		20			20		150	μA
		V_{DD} = 10V, V_{IN} = V_{DD} or V_{SS}		40			40		300	μA
		V_{DD} = 15V, V_{IN} = V_{DD} or V_{SS}		80			80		600	μA
V_{OL}	Low Level Output Voltage	V_{DD} = 5V		0.05		0	0.05		0.05	V
		V_{DD} = 10V		0.05		0	0.05		0.05	V
		V_{DD} = 15V		0.05		0	0.05		0.05	V

DC Electrical Characteristics 40XXBC (Note 2) (Continued)

Symbol	Parameter	Conditions	−40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
V_{OH}	High Level Output Voltage	V_{DD} = 5V	4.95		4.95	5		4.95		V
		V_{DD} = 10V	9.95		9.95	10		9.95		V
		V_{DD} = 15V	14.95		14.95	15		14.95		V
V_{IL}	Low Level Input Voltage	V_{DD} = 5V, V_O = 0.5V or 4.5V		1.5		2	1.5		1.5	V
		V_{DD} = 10V, V_O = 1.0V or 9.0V		3.0		4	3.0		3.0	V
		V_{DD} = 15V, V_O = 1.5V or 13.5V		4.0		6	4.0		4.0	V
V_{IH}	High Level Input Voltage	V_{DD} = 5V, V_O = 0.5V or 4.5V	3.5		3.5	3		3.5		V
		V_{DD} = 10V, V_O = 1.0V or 9.0V	7.0		7.0	6		7.0		V
		V_{DD} = 15V, V_O = 1.5V or 13.5V	11.0		11.0	9		11.0		V
I_{OL}	Low Level Output Current (See Note 3)	V_{DD} = 5V, V_O = 0.4V	0.52		0.44	0.88		0.36		mA
		V_{DD} = 10V, V_O = 0.5V	1.3		1.1	2.25		0.9		mA
		V_{DD} = 15V, V_O = 1.5V	3.6		3.0	8.8		2.4		mA
I_{OH}	High Level Output Current (See Note 3)	V_{DD} = 5V, V_O = 4.6V	−0.52		−0.44	−0.88		−0.36		mA
		V_{DD} = 10V, V_O = 9.5V	−1.3		−1.1	−2.25		−0.9		mA
		V_{DD} = 15V, V_O = 13.5V	−3.6		−3.0	−8.8		−2.4		mA
I_{IN}	Input Current	V_{DD} = 15V, V_{IN} = 0V		−0.30		-10^{-5}	−0.30		−1.0	μA
		V_{DD} = 15V, V_{IN} = 15V		0.30		10^{-5}	0.30		1.0	μA

AC Electrical Characteristics* CD4020BM/CD4020BC, CD4040BM/CD4040BC

T_A = 25°C, C_L = 50 pF, R_L = 200k, t_r = t_f = 20 ns, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{PHL1}, t_{PLH1}	Propagation Delay Time to Q_1	V_{DD} = 5V		250	550	ns
		V_{DD} = 10V		100	210	ns
		V_{DD} = 15V		75	150	ns
t_{PHL}, t_{PLH}	Interstage Propagation Delay Time from Q_n to Q_{n+1}	V_{DD} = 5V		150	330	ns
		V_{DD} = 10V		60	125	ns
		V_{DD} = 15V		45	90	ns
t_{THL}, t_{TLH}	Transition Time	V_{DD} = 5V		100	200	ns
		V_{DD} = 10V		50	100	ns
		V_{DD} = 15V		40	80	ns
t_{WL}, t_{WH}	Minimum Clock Pulse Width	V_{DD} = 5V		125	335	ns
		V_{DD} = 10V		50	125	ns
		V_{DD} = 15V		40	100	ns
t_{rCL}, t_{fCL}	Maximum Clock Rise and Fall Time	V_{DD} = 5V			No Limit	ns
		V_{DD} = 10V			No Limit	ns
		V_{DD} = 15V			No Limit	ns
f_{CL}	Maximum Clock Frequency	V_{DD} = 5V	1.5	4		MHz
		V_{DD} = 10V	4	10		MHz
		V_{DD} = 15V	5	12		MHz
$t_{PHL(R)}$	Reset Propagation Delay	V_{DD} = 5V		200	450	ns
		V_{DD} = 10V		100	210	ns
		V_{DD} = 15V		80	170	ns
$t_{WH(R)}$	Minimum Reset Pulse Width	V_{DD} = 5V		200	450	ns
		V_{DD} = 10V		100	210	ns
		V_{DD} = 15V		80	170	ns
C_{in}	Average Input Capacitance	Any Input		5	7.5	pF
C_{pd}	Power Dissipation Capacitance			50		pF

*AC Parameters are guaranteed by DC correlated testing.

AC Electrical Characteristics* CD4060BM/CD4060BC

$T_A = 25°C$, $C_L = 50$ pF, $R_L = 200k$, $t_r = t_f = 20$ ns, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{PHL4}, t_{PLH4}	Propagation Delay Time to Q_4	$V_{DD} = 5V$		550	1300	ns
		$V_{DD} = 10V$		250	525	ns
		$V_{DD} = 15V$		200	400	ns
t_{PHL}, t_{PLH}	Interstage Propagation Delay Time from Q_n to Q_{n+1}	$V_{DD} = 5V$		150	330	ns
		$V_{DD} = 10V$		60	125	ns
		$V_{DD} = 15V$		45	90	ns
t_{THL}, t_{TLH}	Transition Time	$V_{DD} = 5V$		100	200	ns
		$V_{DD} = 10V$		50	100	ns
		$V_{DD} = 15V$		40	80	ns
t_{WL}, t_{WH}	Minimum Clock Pulse Width	$V_{DD} = 5V$		170	500	ns
		$V_{DD} = 10V$		65	170	ns
		$V_{DD} = 15V$		50	125	ns
t_{rCL}, t_{fCL}	Maximum Clock Rise and Fall Time	$V_{DD} = 5V$			No Limit	ns
		$V_{DD} = 10V$			No Limit	ns
		$V_{DD} = 15V$			No Limit	ns
f_{CL}	Maximum Clock Frequency	$V_{DD} = 5V$	1	3		MHz
		$V_{DD} = 10V$	3	8		MHz
		$V_{DD} = 15V$	4	10		MHz
$t_{PHL(R)}$	Reset Propagation Delay	$V_{DD} = 5V$		200	450	ns
		$V_{DD} = 10V$		100	210	ns
		$V_{DD} = 15V$		80	170	ns
$t_{WH(R)}$	Minimum Reset Pulse Width	$V_{DD} = 5V$		200	450	ns
		$V_{DD} = 10V$		100	210	ns
		$V_{DD} = 15V$		80	170	ns
C_{in}	Average Input Capacitance	Any Input		5	7.5	pF
C_{pd}	Power Dissipation Capacitance			50		pF

*AC Parameters are guaranteed by DC correlated testing.

CD4060B Typical Oscillator Connections

RC Oscillator

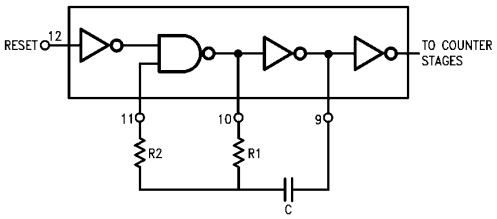

TL/F/5953–4

Crystal Oscillator

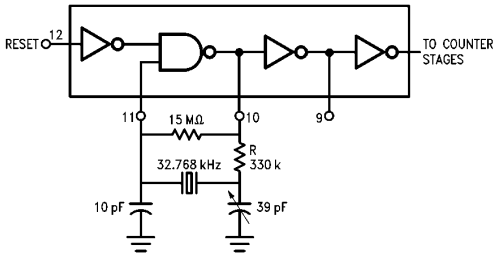

TL/F/5953–5

Schematic Diagrams

CD4020BM/CD4020BC Schematic Diagram

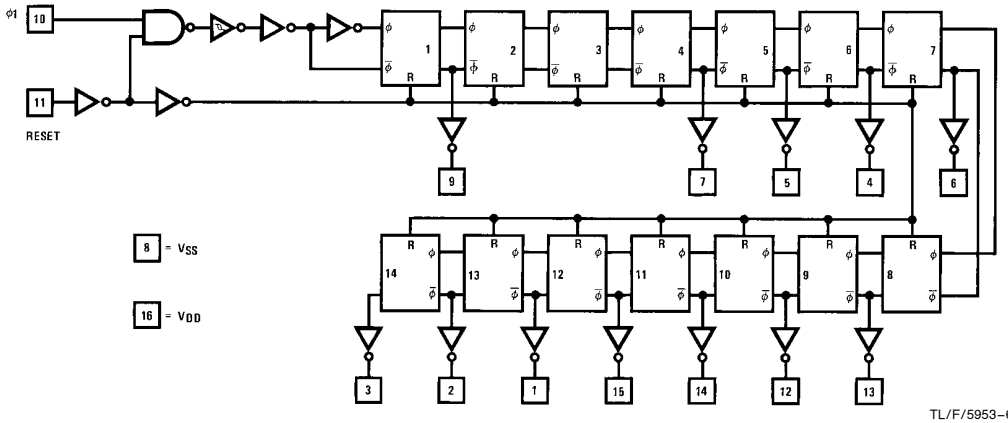

TL/F/5953–6

CD4040BM/CD4040BC Schematic Diagram

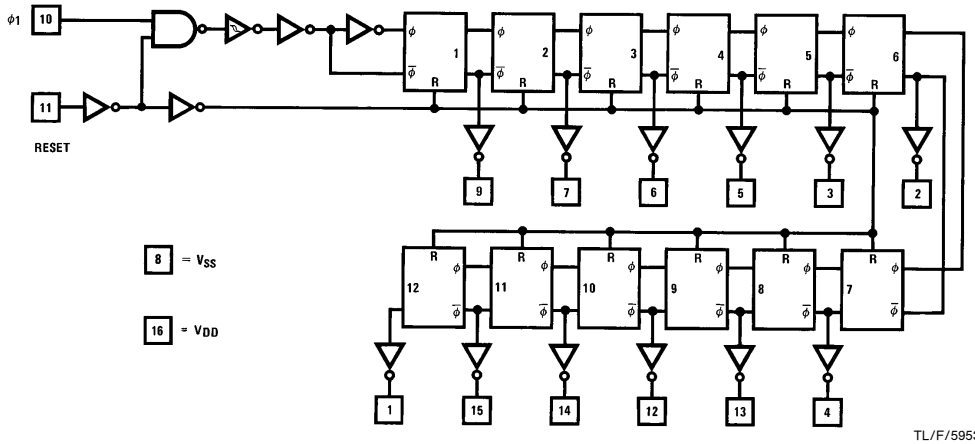

TL/F/5953–7

CD4060BM/CD4060BC Schematic Diagram

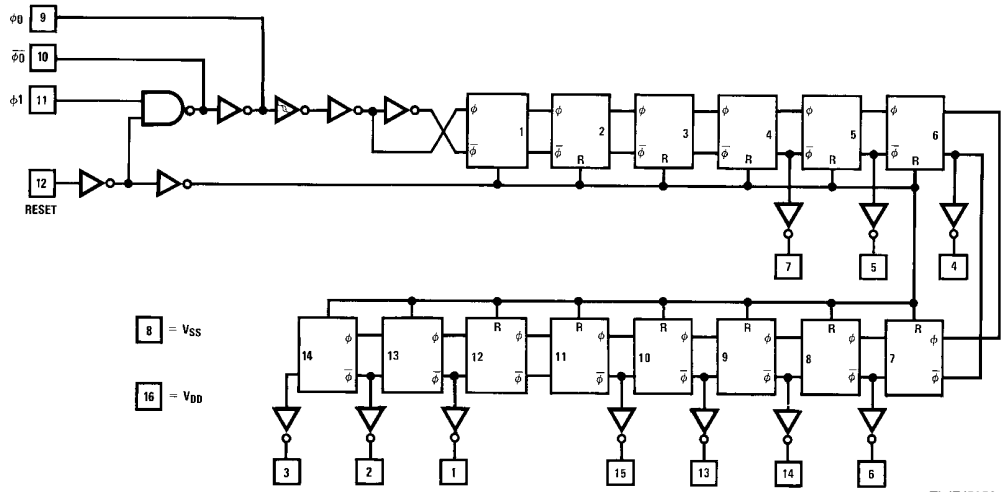

TL/F/5953–8

Physical Dimensions inches (millimeters)

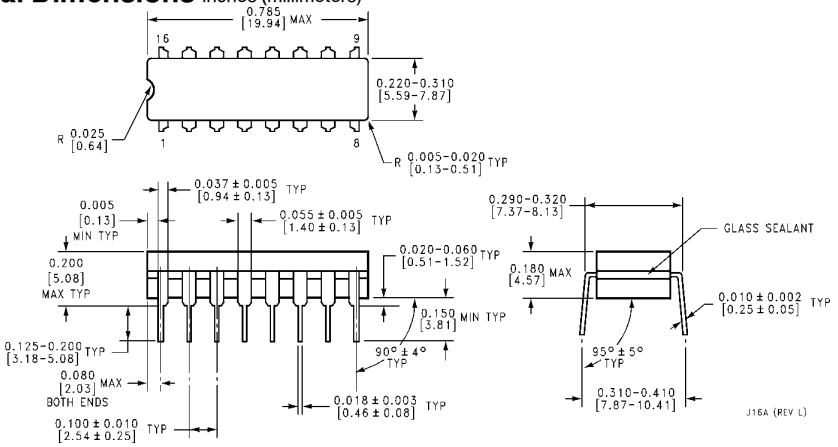

Ceramic Dual-In-Line Package (J)
Order Number CD4020BMJ, CD4020BCJ, CD4040BMJ, CD4040BCJ, CD4060BMJ or CD4060BCJ
NS Package Number J16A

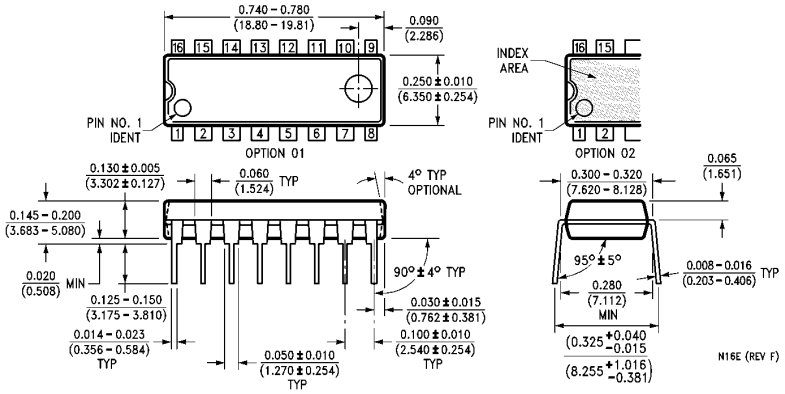

Molded Dual-In-Line Package (N)
Order Number CD4020BMN, CD4020BCN, CD4040BMN, CD4040BCN, CD4060BMN or CD4060BCN
NS Package Number N16E

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.