

MDLM117-H REV 0A0

 Original Creation Date: 06/27/95
 Last Update Date: 09/18/95
 Last Major Revision Date: 06/27/95

POSITIVE THREE TERMINAL ADJUSTABLE VOLTAGE REGULATOR
General Description

The LM117 adjustable 3-terminal positive voltage regulator is capable of supplying in excess of 0.5A over a 1.2V to 37V output range. It is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, both line and load regulation are better than standard fixed regulators.

In addition to higher performance than fixed regulators, the LM117 offers full overload protection available only in IC's. Included on the chip are current limit, thermal overload protection and safe area protection. All overload protection circuitry remains fully functional even if the adjustment terminal is disconnected.

Normally, no capacitors are needed unless the device is situated more than 6 inches from the input filter capacitors in which case an input bypass is needed. An optional output capacitor can be added to improve transient response. The adjustment terminal can be bypassed to achieve very high ripple rejection ratios which are difficult to achieve with standard 3-terminal regulators.

Besides replacing fixed regulators, the LM117 is useful in a wide variety of other applications. Since the regulator is "Floating" and sees only the input-to-output differential voltage, supplies of several hundred volts can be regulated as long as the maximum input to output differential is not exceeded, (i.e., avoid short-circuiting the output).

Also, it makes an especially simple adjustable switching regulator, a programmable output regulator, or by connecting a fixed resistor between the adjustment pin and output, the LM117 can be used as a precision current regulator. Supplies with electronic shutdown can be achieved by clamping the adjustment terminal to ground which programs the output to 1.2V where most loads draw little current.

Industry Part Number

LM117H

NS Part Numbers

LM117H-SMD

Prime Die

LM117H

Controlling Document

DESC.# 7703401XA

Processing

MIL-STD-883, Method 5004

Quality Conformance Inspection

MIL-STD-883, Method 5005

Subgrp	Description	Temp (°C)
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55

Features

- Guaranteed 0.5A output current.
- Adjustable output down to 1.2V.
- Current limit constant with temperature.
- 80 dB ripple rejection.
- Output is short-circuit protected.

(Absolute Maximum Ratings)

(Note 1)

Power Dissipation	Internally Limited
Input-Output Voltage Differential	+40V, -0.3V
Maximum Junction Temperature	150 C
Storage Temperature Range	-65 C to +150 C
Lead Temperature (Soldering, 10 seconds)	300 C
Thermal Resistance	
ThetaJA	
(Still Air)	186 C/W
(500LF/Min Air flow)	64 C/W
ThetaJC	21 C/W
ESD Tolerance	
(Note 2)	3kV

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Note 2: Human body model, 1.5K Ohms in series with 100pF.

Recommended Operating Conditions

Operating Temperature Range	-55 C ≤ TA ≤ +125 C
-----------------------------	---------------------

Electrical Characteristics

DC PARAMETERS

(The following conditions apply to all the following parameters, unless otherwise specified.)
DC: $I_L = 8\text{mA}$

SYMBOL	PARAMETER	CONDITIONS	NOTES	PIN-NAME	MIN	MAX	UNIT	SUB-GROUPS
Vref	Reference Voltage	Vdiff = 3V			1.2	1.3	V	1
		Vdiff = 40V			1.2	1.3	V	1, 2, 3
		Vdiff = 3.3V			1.2	1.3	V	2, 3
Rline	Line Regulation	$3\text{V} \leq \text{Vdiff} \leq 40\text{V}$, $\text{Vout} = \text{Vref}$			-9	9	mV	1
		$3.3\text{V} \leq \text{Vdiff} \leq 40\text{V}$, $\text{Vout} = \text{Vref}$			-23	23	mV	2, 3
Rload	Load Regulation	Vdiff = 3V, $10\text{mA} \leq I_L \leq 500\text{mA}$			-15	15	mV	1
		Vdiff = 40V, $10\text{mA} \leq I_L \leq 150\text{mA}$			-15	15	mV	1
		Vdiff = 3.3V, $10\text{mA} \leq I_L \leq 500\text{mA}$			-15	15	mV	2, 3
		Vdiff = 40V, $10\text{mA} \leq I_L \leq 100\text{mA}$			-15	15	mV	2, 3
Vrth	Thermal Regulation	$\text{Vin} = 14.6\text{V}$, $I_L = 300\text{mA}$, $\text{Pd} = 4\text{W}$, $t = 20\text{mS}$			-3.1	3.1	mV	1
Iadj	Adjustment Pin Current	Vdiff = 3V				100	μA	1
		Vdiff = 40V				100	μA	1, 2, 3
		Vdiff = 3.3V				100	μA	2, 3
Delta Iadj	Adjustment Pin Current Change	Vdiff = 3V, $10\text{mA} \leq I_L \leq 500\text{mA}$			-5	5	μA	1
		Vdiff = 40V, $10\text{mA} \leq I_L \leq 150\text{mA}$			-5	5	μA	1
		$3\text{V} \leq \text{Vdiff} \leq 40\text{V}$			-5	5	μA	1
		$3.3\text{V} \leq \text{Vdiff} \leq 40\text{V}$			-5	5	μA	2, 3
		Vdiff = 3.3V, $10\text{mA} \leq I_L \leq 500\text{mA}$			-5	5	μA	2, 3
		Vdiff = 40V, $10\text{mA} \leq I_L \leq 100\text{mA}$			-5	5	μA	2, 3
I _{lmin}	Minimum Load Current	Vdiff = 3V, $\text{Vout} = 1.4\text{V}$, (forced)				5	mA	1
		Vdiff = 40V, $\text{Vout} = 1.4\text{V}$, (forced)				5	mA	1, 2, 3
		Vdiff = 3.3V, $\text{Vout} = 1.4\text{V}$, (forced)				5	mA	2, 3
I _{cl}	Current Limit	Vdiff = 15V			.5	1.65	A	1, 2, 3
		Vdiff = 40V			.15	.65	A	1

AC PARAMETERS

(The following conditions apply to all the following parameters, unless otherwise specified.)
AC: $I_L = 8\text{mA}$

Rr	Ripple Rejection	$f = 120\text{Hz}$, $\text{C}_{\text{adj}} = 10\mu\text{F}$, $\text{Vout} = \text{Vref}$	1		66		dB	4, 5, 6
----	------------------	--	---	--	----	--	----	---------

Note 1: Group "A" sample only, test at all temp.


Graphics and Diagrams

GRAPHICS#	DESCRIPTION
9784HRB1	3LD .200 DIA P.C. METAL CAN PKG (B/I CKT)
H03ARD	3LD .200 DIA P.C. METAL CAN PKG (P/P DWG)

See attached graphics following this page.

REVISIONS

LTR	DESCRIPTION	E.C. N.	DATE	BY/APP'D
C	REVISE & REDRAW PER NEW STANDARD	10403	05/24/94	TL/GM
D	UPDATE MILAERO STAMP: Ø .325 WAS Ø .326; REVISE TOLERANCES	10798	02/28/95	TL/L

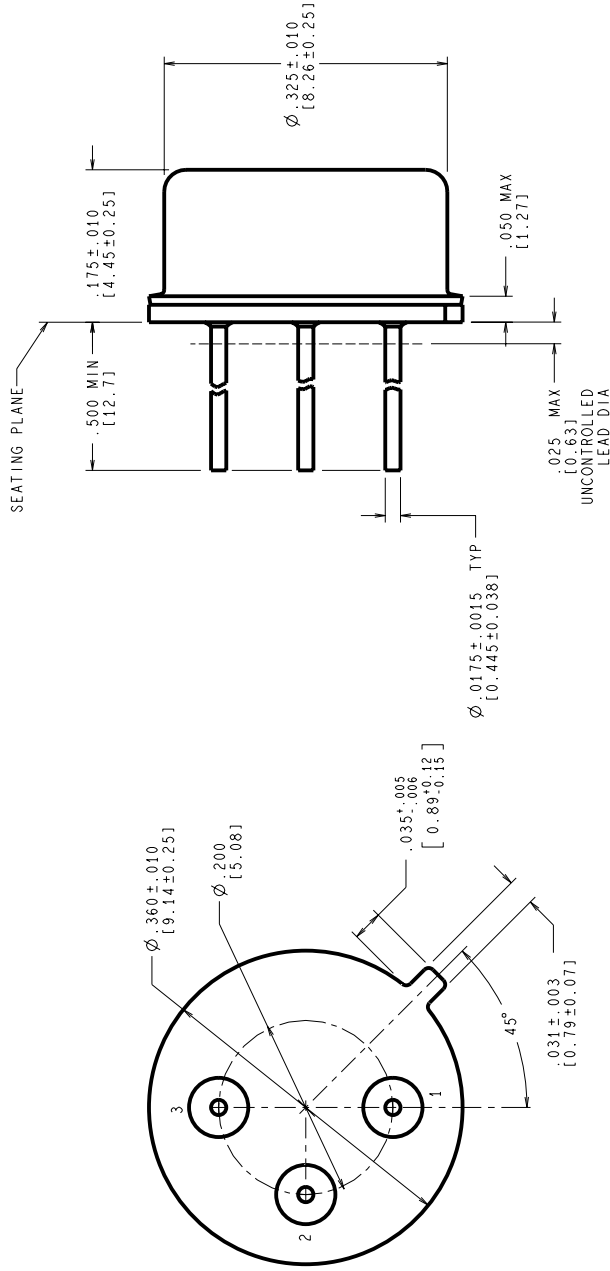

CONTROLLING DIMENSION IS INCH
VALUES IN [] ARE MILLIMETERS

NOTES: UNLESS OTHERWISE SPECIFIED

- LEADS TO BE LOCATED WITHIN .010 IN/ 0.25 mm OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM WIDTH TAB.
- STANDARD METAL CAN TYPE: SOLID BASE, KOVAR.
- APPLIES TO MIL-AERO AND LINEAR PRODUCTS.
- REFERENCE JEDEC REGISTRATION TO-39, JEDEC PUBLICATION No. 95.

MIL-I-38535
CONFIGURATION CONTROL

APPROVALS	DATE		
DRW: T. LEQUANG	05/24/94		
DATE: 05/24/94			
DRG. CHK:			
ENGR. CHK:			
PROJECTION			
SCALE	SIZE	DRAWING NUMBER	REV
N/A	C	MKT-H03A	D
DO NOT SCALE DRAWING SHEET 1 of 1			

National Semiconductor
2500 Semiconductor Dr., Santa Clara, CA 95052-8090

METAL CAN,
TO-39, 3 LEAD,
.200 DIA P.C.