

**MNLM117HV-H REV 2A1**

 Original Creation Date: 06/27/95  
 Last Update Date: 09/22/00  
 Last Major Revision Date: 08/22/00

**POSITIVE THREE TERMINAL HIGH VOLTAGE ADJUSTABLE  
 REGULATOR**
**General Description**

The LM117HV adjustable 3-terminal positive voltage regulator is capable of supplying in excess of 0.5A over a 1.2V to 57V output range. It is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, both line and load regulation are better than standard fixed regulators.

In addition to higher performance than fixed regulators, the LM117HV offers full overload protection available only in IC's. Included on the chip are current limit, thermal overload protection and safe area protection. All overload protection circuitry remains fully functional even if the adjustment terminal is disconnected.

Normally, no capacitors are needed unless the device is situated more than 6 inches from the input filter capacitors in which case an input bypass is needed. An optional output capacitor can be added to improve transient response. The adjustment terminal can be bypassed to achieve very high ripple rejection ratios which are difficult to achieve with standard 3-terminal regulators.

Besides replacing fixed regulators, the LM117HV is usefull in a wide variety of other applications. Since the regulator is "floating" and sees only the input-to-output differential voltage, supplies of several hundred volts can be regulated as long as the maximum input to output differential is not exceeded, (i.e. do not short the output to ground).

Also, it makes an especially simple adjustable switching regulator, a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM117HV can be used as a precision current regulator. Supplies with electronic shutdown can be achieved by clamping the adjustment terminal to ground which programs the output to 1.2V where most loads draw little current.

**Industry Part Number**

LM117HVH

**NS Part Numbers**

LM117HVH/883

**Prime Die**

LM117HVH

**Processing**

MIL-STD-883, Method 5004

**Quality Conformance Inspection**

MIL-STD-883, Method 5005

**Subgrp Description**
**Temp ( °C)**

1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55

**Features**

- Adjustable output down to 1.2V
- Guaranteed 0.5A output current
- Line regulation typically 0.01%/V
- Load regulation typically 0.1%
- Current limit constant with temperature
- Eliminates the need to stock many voltages
- 80 dB ripple rejection
- Output is short-circuit protected

**(Absolute Maximum Ratings)**

(Note 1)

Power Dissipation (Note 2)	Internally Limited
Input-Output Voltage Differential	+60V, -0.3V
Maximum Junction Temperature	150 C
Storage Temperature Range	-65 C to 150 C
Lead Temperature (Soldering, 10 seconds)	300 C
Thermal Resistance	
ThetaJA (Still Air)	186 C/W
(500LF/Min Air flow)	64 C/W
ThetaJC	21 C/W
ESD Tolerance (Note 3)	2000V

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.

Note 2: The maximum power dissipation must be derated at elevated temperatures and is dictated by  $T_{jmax}$  (maximum junction temperature),  $\Theta_{JA}$  (package junction to ambient thermal resistance), and  $T_A$  (ambient temperature). The maximum allowable power dissipation at any temperature is  $P_{dmax} = (T_{jmax} - T_A)/\Theta_{JA}$  or the number given in the Absolute Maximum Ratings, whichever is lower.

Note 3: Human body model, 1.5K Ohms in series with 100pF.

**Recommended Operating Conditions**

Operating Temperature Range	-55 C ≤ TA ≤ +125 C
-----------------------------	---------------------

## Electrical Characteristics

### DC PARAMETERS

(The following conditions apply to all the following parameters, unless otherwise specified.)  
DC:  $V_{diff} = V_{in} - V_{out}$ ,  $I_l = 8\text{mA}$ ,  $V_{out} = 1.25\text{V}$  (Nominal)

SYMBOL	PARAMETER	CONDITIONS	NOTES	PIN-NAME	MIN	MAX	UNIT	SUB-GROUPS
Iadj	Adjustment Pin Current	$V_{diff} = 3\text{V}$				100	uA	1
		$V_{diff} = 3.3\text{V}$				100	uA	2, 3
		$V_{diff} = 40\text{V}$				100	uA	1, 2, 3
Iq	Minimum Load Current	$V_{diff} = 3\text{V}$ , $V_{out} = 1.7\text{V}$				5.0	mA	1
		$V_{diff} = 3.3\text{V}$ , $V_{out} = 1.7\text{V}$				5.0	mA	2, 3
		$V_{in} = 40\text{V}$ , $V_{out} = 1.7\text{V}$				5.0	mA	1, 2, 3
		$V_{in} = 60\text{V}$ , $V_{out} = 1.7\text{V}$				8.2	mA	1
Vref	Reference Voltage	$V_{diff} = 3\text{V}$			1.2	1.3	V	1
		$V_{diff} = 3.3\text{V}$			1.2	1.3	V	2, 3
		$V_{diff} = 40\text{V}$			1.2	1.3	V	1, 2, 3
Vrline	Line Regulation	$3\text{V} \leq V_{diff} \leq 40\text{V}$ , $V_{out} = V_{ref}$			-8.64	8.64	mV	1
		$3.3\text{V} \leq V_{diff} \leq 40\text{V}$ , $V_{out} = V_{ref}$			-18	18	mV	2, 3
		$40\text{V} \leq V_{diff} \leq 60\text{V}$ , $I_l = 60\text{mA}$			-25	25	mV	1
Vrload	Load Regulation	$V_{diff} = 3\text{V}$ , $I_l = 10\text{mA}$ to $500\text{mA}$			-15	15	mV	1
		$V_{diff} = 3.3\text{V}$ , $I_l = 10\text{mA}$ to $500\text{mA}$			-15	15	mV	2, 3
		$V_{diff} = 40\text{V}$ , $I_l = 10\text{mA}$ to $150\text{mA}$			-15	15	mV	1
		$V_{diff} = 40\text{V}$ , $I_l = 10\text{mA}$ to $100\text{mA}$			-15	15	mV	2, 3
Delta/ Iadj	Adjustment Current Change	$V_{diff} = 3\text{V}$ , $I_l = 10$ to $500\text{mA}$			-5	5	uA	1
		$V_{diff} = 3.3\text{V}$ , $I_l = 10\text{mA}$ to $500\text{mA}$			-5	5	uA	2, 3
		$V_{diff} = 40\text{V}$ , $I_l = 10\text{mA}$ to $150\text{mA}$			-5	5	uA	1
		$V_{diff} = 40\text{V}$ , $I_l = 10\text{mA}$ to $100\text{mA}$			-5	5	uA	2, 3
		$3\text{V} \leq V_{diff} \leq 40\text{V}$			-5	5	uA	1
		$3.3\text{V} \leq V_{diff} \leq 40\text{V}$			-5	5	uA	2, 3
Ios	Short Circuit Current	$V_{in} = 60\text{V}$			0	0.4	A	1
		$V_{diff} = 4.25\text{V}$			0.5	1.8	A	1
Theta R	Thermal Regulation	$t = 20\text{mS}$ , $V_{diff} = 40\text{V}$ , $I_l = 150\text{mA}$				6	mV	1

## Electrical Characteristics

### AC PARAMETERS

SYMBOL	PARAMETER	CONDITIONS	NOTES	PIN-NAME	MIN	MAX	UNIT	SUB-GROUPS
Rr	Ripple Rejection	Vin = +6.25V f = 120Hz, ei = 1Vrms, I1=125mA	1		66		dB	4, 5, 6

### DC PARAMETERS: DRIFT VALUES

(The following conditions apply to all the following parameters, unless otherwise specified.)

DC: Vdiff = Vin - Vout, I1 = 8mA, Vout = 1.25V (Nominal) "Delta calculations to be performed after Group B-5 for Space Level Devices ONLY, unless otherwise specified on IPI.

Iadj	Adjust Pin Current	Vdiff = 3V			-10	10	uA	1
		Vdiff = 40V			-10	10	uA	1
Vref	Reference Voltage	Vdiff = 3V			-12	12	mV	1
		Vdiff = 40V			-12	12	mV	1
Rline	Line Regulation	$3V \leq V_{diff} \leq 40V$ , Vout = 1.2V			-4	4	mV	1
		$40V \leq V_{diff} \leq 60V$			-4	4	mV	1

Note 1: Tested at +25 C; Guaranteed, but not tested at +125 C and -55C.


## Graphics and Diagrams

GRAPHICS#	DESCRIPTION
09784HRB3	METAL CAN (H), TO-39, 3LD, .200 DIA P.C. (B/I CKT)
H03ARD	METAL CAN (H), TO-39, 3LD, .200 DIA P.C. (P/P DWG)
P000174A	METAL CAN (H), TO-39, 3LD, .200 DIA P.C. (PINOUT)

See attached graphics following this page.

REVISIONS

LTR	DESCRIPTION	E.C. N.	DATE	BY/APP'D
C	REVISE & REDRAW PER NEW STANDARD	10403	05/24/94	TL/GM
D	UPDATE MILAERO STAMP: Ø .325 WAS Ø .326; REVISE TOLERANCES	10798	02/28/95	TL/L

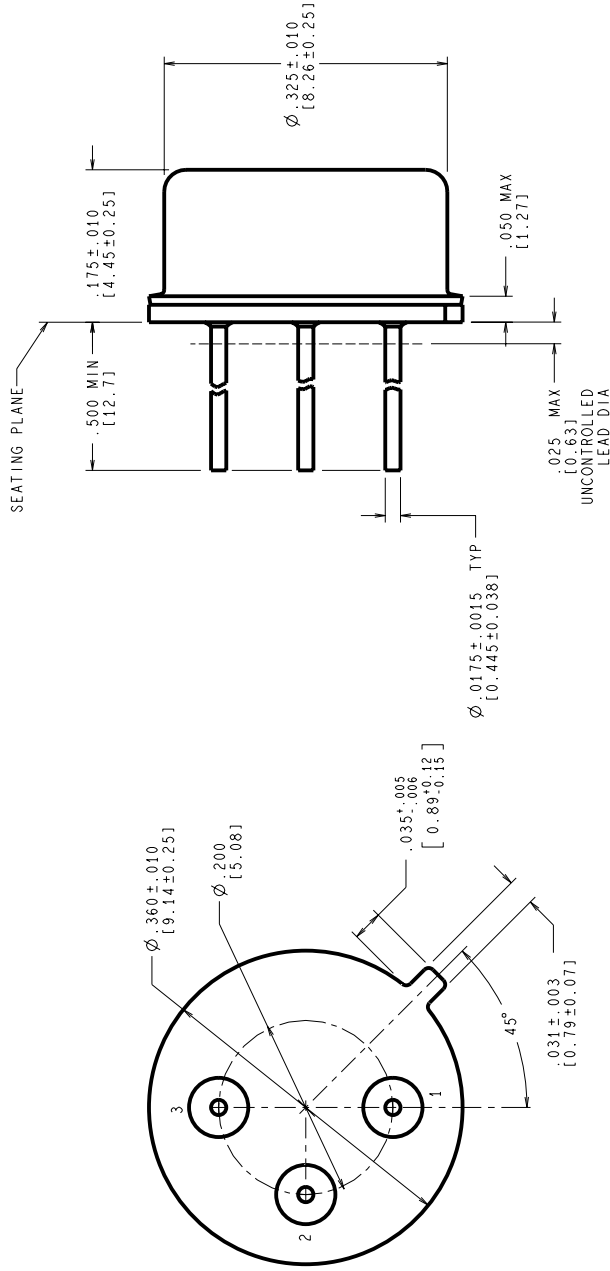

CONTROLLING DIMENSION IS INCH  
VALUES IN [ ] ARE MILLIMETERS

NOTES: UNLESS OTHERWISE SPECIFIED

- LEADS TO BE LOCATED WITHIN .010 IN/ .25 mm OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM WIDTH TAB.
- STANDARD METAL CAN TYPE: SOLID BASE, KOVAR.
- APPLIES TO MIL-AERO AND LINEAR PRODUCTS.
- REFERENCE JEDEC REGISTRATION TO-39, JEDEC PUBLICATION No. 95.


MIL-I-38535  
CONFIGURATION CONTROL

APPROVALS	DATE
DRW: T. LEQUANG	05/24/94
DATE: 05/24/94	
DRG. CHK.	
ENGR. CHK.	
PROJECTION	
SCALE	SIZE
N/A	C
REV	D
DO NOT SCALE DRAWING	SHEET 1 of 1

**National Semiconductor**  
2500 Semiconductor Dr., Santa Clara, CA 95052-8090

METAL CAN,  
TO-39, 3 LEAD,  
.200 DIA P.C.

MKT-H03A

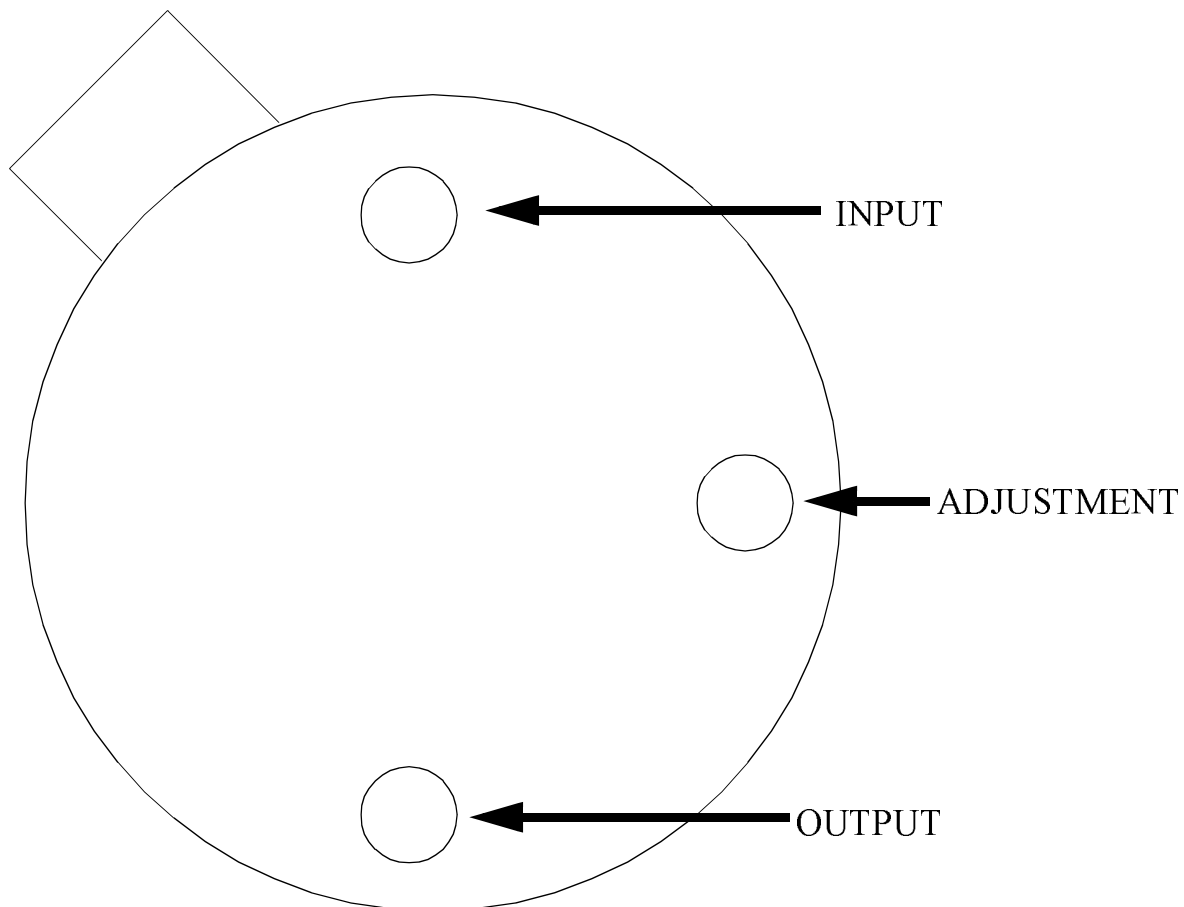

LM117H, LM117HVH  
3 - LEAD TO-39  
CONNECTION DIAGRAM  
BOTTOM VIEW  
P000174A



National Semiconductor™  
MIL/AEROSPACE OPERATIONS  
2900 SEMICONDUCTOR DRIVE  
SANTA CLARA, CA 95050

**Revision History**

<b>Rev</b>	<b>ECN #</b>	<b>Rel Date</b>	<b>Originator</b>	<b>Changes</b>
1B0	M0001542	09/22/00	Barbara Lopez	Changed: MNLM117HV-H Rev. 1A0 to MNLM117HV-H Rev. 1B0. Added note 1 to electrical parameter Ripple Rejection.
2A1	M0003048	09/22/00	Rose Malone	Update MDS: MNLM117HV-H, Rev. 1B0 to MNLM117HV-H, Rev. 2A1. Added Drift Table to Electrical Section. Updated graphics Section.