

LM2935 Low Dropout Dual Regulator

General Description


The LM2935 dual 5V regulator provides a 750 mA output as well as a 10 mA standby output. It features a low quiescent current of 3 mA or less when supplying 10 mA loads from the 5V standby regulator output. This unique characteristic and the extremely low input-output differential required for proper regulation (0.55V for output currents of 10 mA) make the LM2935 the ideal regulator for power systems that include standby memory. Applications include microprocessor power supplies demanding as much as 750 mA of output current.

Designed for automotive applications, the LM2935 and all regulated circuitry are protected from reverse battery installations or 2 battery jumps. During line transients, such as a load dump (60V) when the input voltage to the regulator can momentarily exceed the specified maximum operating voltage, the 0.75A regulator will automatically shut down to protect both internal circuits and the load while the standby regulator will continue to power any standby load. The LM2935 cannot be harmed by temporary mirror-image insertion. Familiar regulator features such as short circuit and thermal overload protection are also provided.


Features

- Two 5V regulated outputs
- Output current in excess of 750 mA
- Low quiescent current standby regulator
- Input-output differential less than 0.6V at 0.5A
- Reverse battery protection
- 60V load dump protection
- -50V reverse transient protection
- Short circuit protection
- Internal thermal overload protection
- Available in 5-lead TO-220
- ON/OFF switch controls high current output
- Reset error flag
- P* Product Enhancement tested

Typical Application and Connection Diagram

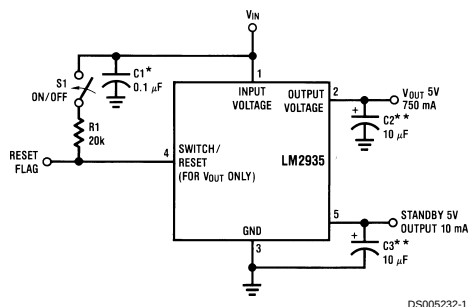

DS005232-1

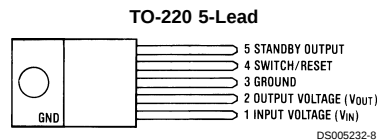

DS005232-8

Front View
Order Number LM2935T
See NS Package Number T05A

*Required if regulator is located far from power supply filter.
**C_{OUT} must be at least 10 µF to maintain stability. May be increased without bound to maintain regulation during transients. Locate as close as possible to the regulator. This capacitor must be rated over the same operating temperature range as the regulator. The equivalent series resistance (ESR) of this capacitor is critical; see curve.

FIGURE 1. Test and Application Circuit

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Input Voltage
Operating Range 26V

Overvoltage Protection 60V
Internal Power Dissipation (Note 2) Internally Limited
Operating Temperature Range -40°C to + 125°C
Maximum Junction Temperature 150°C
Storage Temperature Range -65°C to + 150°C
Lead Temp. (Soldering, 10 seconds) 230°C

Electrical Characteristics for V_{OUT}

$V_{IN} = 14V$, $I_O = 500\text{ mA}$, $T_J = 25^\circ\text{C}$ (Note 5), $C_2 = 10\text{ }\mu\text{F}$ (unless otherwise specified)

Parameter	Conditions	Typ	Tested Limit (Note 4)	Units Limit
Output Voltage	$6V \leq V_{IN} \leq 26V$, $5\text{ mA} \leq I_O \leq 500\text{ mA}$, -40°C $\leq T_J \leq 125^\circ\text{C}$ (Note 3)	5.00	5.25 4.75	V_{MAX} V_{MIN}
Line Regulation	$9V \leq V_{IN} \leq 16V$, $I_O = 5\text{ mA}$ $6V \leq V_{IN} \leq 26V$, $I_O = 5\text{ mA}$	4 10	25 50	mV_{MAX} mV_{MAX}
Load Regulation	$5\text{ mA} \leq I_O \leq 500\text{ mA}$	10	50	mV_{MAX}
Output Impedance	500 mA_{DC} and 10 mA_{rms} , 100 Hz–10 kHz	200		$\text{m}\Omega$
Quiescent Current	$I_O \leq 10\text{ mA}$, No Load on Standby $I_O = 500\text{ mA}$, No Load on Standby $I_O = 750\text{ mA}$, No Load on Standby	3 40 90	100	mA mA_{MAX} mA
Output Noise Voltage	10 Hz–100 kHz	100		μV_{rms}
Long Term Stability		20		$\text{mV}/1000\text{ hr}$
Ripple Rejection	$f_O = 120\text{ Hz}$	66		dB
Dropout Voltage	$I_O = 500\text{ mA}$ $I_O = 750\text{ mA}$	0.45 0.82	0.6	V_{MAX}
Current Limit		1.2	0.75	A_{MIN}
Maximum Operational Input Voltage		31	26	V_{MIN}
Maximum Line Transient	$V_O \leq 5.5V$	70	60	V
Reverse Polarity Input Voltage, DC		-30	-15	V
Reverse Polarity Input Voltage, Transient	1% Duty Cycle, $\tau \leq 100\text{ ms}$, 10 Ω Load	-80	-50	V
Reset Output Voltage				
Low	$R_1 = 20\text{ k}$, $V_{IN} = 4.0V$	0.9	1.2	V_{MAX}
High	$R_1 = 20\text{ k}$, $V_{IN} = 14V$	5.0	6.0 4.5	V_{MAX} V_{MIN}
Reset Output Current	Reset = 1.2V	5		mA
ON/OFF Resistor	$R_1 (\pm 10\% \text{ Tolerance})$		20	$\text{k}\Omega_{MAX}$

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics.

Note 2: Thermal resistance without a heat sink for junction to case temperature is 3°C/W (TO-220). Thermal resistance for TO-220 case to ambient temperature is 50°C/W.

Note 3: The temperature extremes are guaranteed but not 100% production tested. This parameter is not used to calculate outgoing AQL.

Note 4: Tested Limits are guaranteed and 100% tested in production.

Note 5: To ensure constant junction temperature, low duty cycle pulse testing is used.

Electrical Characteristics for Standby Output

$I_O=10\text{ mA}$, $V_{IN}=14\text{V}$, $S1$ open, $C_{OUT}=10\text{ }\mu\text{F}$, $T_J=25^\circ\text{C}$ (Note 5), (unless otherwise specified)

Parameter	Standby Output Conditions	Typ	Tested Limit	Units Limit
Output Voltage	$I_O \leq 10\text{ mA}$, $6\text{V} \leq V_{IN} \leq 26\text{V}$, $-40^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$	5.00	5.25 4.75	V_{MAX} V_{MIN}
Tracking	V_{OUT} —Standby Output Voltage	50	200	mV_{MAX}
Line Regulation	$6\text{V} \leq V_{IN} \leq 26\text{V}$	4	50	mV_{MAX}
Load Regulation	$1\text{ mA} \leq I_O \leq 10\text{ mA}$	10	50	mV_{MAX}
Output Impedance	10 mA_{DC} and 1 mA_{RMS} , 100 Hz–10 kHz	1		Ω
Quiescent Current	$I_O \leq 10\text{ mA}$, V_{OUT} OFF (Note 3)	2	3	mA_{MAX}
Output Noise Voltage	10 Hz–100 kHz	300		μV
Long Term Stability		20		$\text{mV}/1000\text{ hr}$
Ripple Rejection	$f_O=120\text{ Hz}$	66		dB
Dropout Voltage	$I_O \leq 10\text{ mA}$	0.55	0.7	V_{MAX}
Current Limit		70	25	mA_{MIN}
Maximum Operational Input Voltage	$V_O \leq 6\text{V}$	70	60	V_{MIN}
Reverse Polarity Input Voltage, DC	$V_O \geq -0.3\text{V}$, 510 Ω Load	-30	-15	V_{MIN}
Reverse Polarity Input Voltage, Transient	1% Duty Cycle $T \leq 100\text{ ms}$, 500 Ω Load	-80	-50	V_{MIN}

Typical Circuit Waveforms


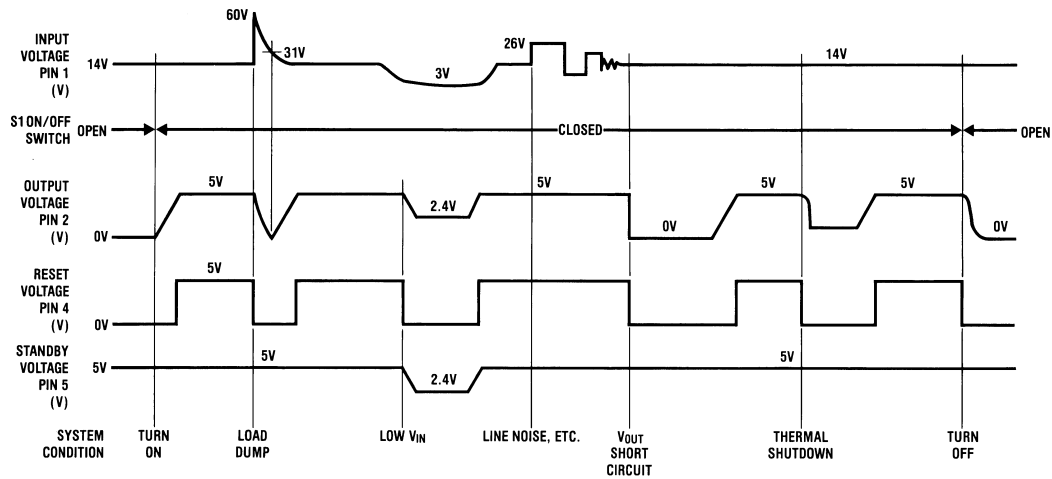


FIGURE 2.


DS005232-2

Typical Performance Characteristics


Dropout Voltage (V_{OUT})

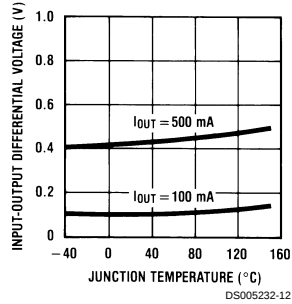


Dropout Voltage (V_{OUT})




Dropout Voltage (V_{STBY})




Low Voltage Behavior




Output Voltage (V_{OUT})

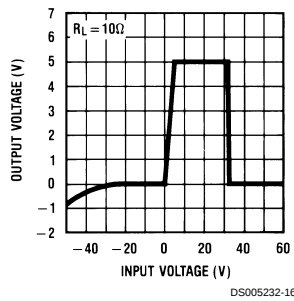


Output Voltage (V_{STBY})




Line Transient Response (V_{OUT})

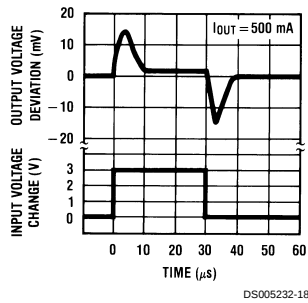

Line Transient Response (V_{STBY})

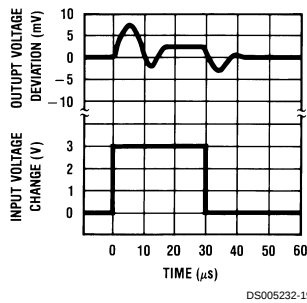


Load Transient Response (V_{OUT})




Typical Performance Characteristics (Continued)

Load Transient Response (V_{STBY})

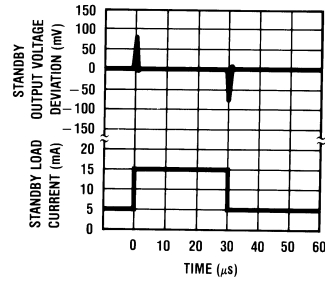


DS005232-21

Peak Output Current (V_{OUT})

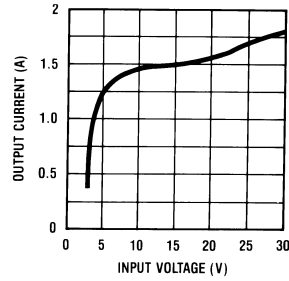


DS005232-22

Peak Output Current (V_{STBY})

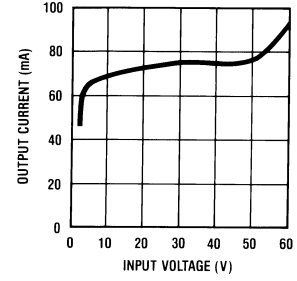


DS005232-23

Quiescent Current (V_{OUT})




DS005232-24

Quiescent Current (V_{STBY})




DS005232-25

Quiescent Current (V_{OUT})




DS005232-26

Quiescent Current (V_{STBY})




DS005232-27

Quiescent Current



DS005232-28


Quiescent Current (V_{STBY})



DS005232-29


Typical Performance Characteristics (Continued)

Ripple Rejection




DS005232-30

Ripple Rejection (V_{OUT})

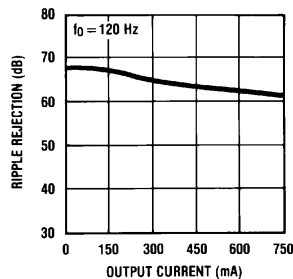


DS005232-31

Ripple Rejection (V_{STBY})




DS005232-32

Output Impedance




DS005232-33

Reset on Startup

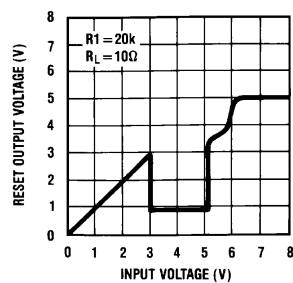


DS005232-34

Maximum Power Dissipation (TO-220)




DS005232-35

Output Capacitor ESR (Standby Output, Pin 5)

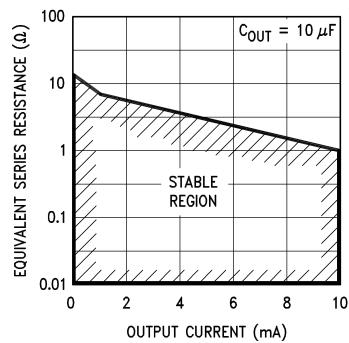

DS005232-9

Output Capacitor ESR (Main Output, Pin 2)

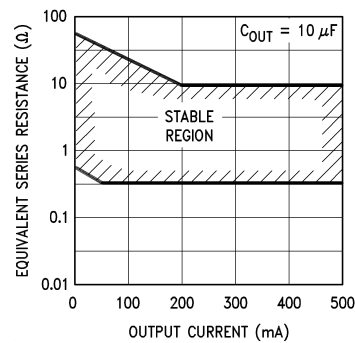

DS005232-10

Definition of Terms

Dropout Voltage: The input-output voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100 mV from the nominal value obtained at 14V input, dropout voltage is dependent upon load current and junction temperature.

Input Voltage: The DC voltage applied to the input terminals with respect to ground.

Input-Output Differential: The voltage difference between the unregulated input voltage and the regulated output voltage for which the regulator will operate.

Line Regulation: The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

Definition of Terms (Continued)

Load Regulation: The change in output voltage for a change in load current at constant chip temperature.

Long Term Stability: Output voltage stability under accelerated life-test conditions after 1000 hours with maximum rated voltage and junction temperature.

Output Noise Voltage: The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

Quiescent Current: The part of the positive input current that does not contribute to the positive load current. The regulator ground lead current.

Ripple Rejection: The ratio of the peak-to-peak input ripple voltage to the peak-to-peak output ripple voltage.

Temperature Stability of V_O : The percentage change in output voltage for a thermal variation from room temperature to either temperature extreme.

Application Hints

EXTERNAL CAPACITORS

The LM2935 output capacitors are required for stability. Without them, the regulator outputs will oscillate, sometimes by many volts. Though the 10 μ F shown are the minimum recommended values, actual size and type may vary depending upon the application load and temperature range. Capacitor effective series resistance (ESR) also factors in the IC stability. Since ESR varies from one brand to the next, some bench work may be required to determine the minimum capacitor value to use in production. Worst-case is usually determined at the minimum ambient temperature and maximum load expected.

Output capacitors can be increased in size to any desired value above the minimum. One possible purpose of this would be to maintain the output voltage during brief conditions of negative input transients that might be characteristic of a particular system.

Capacitors must also be rated at all ambient temperatures expected in the system. Many aluminum type electrolytics will freeze at temperatures less than -30°C , reducing their effective capacitance to zero. To maintain regulator stability down to -40°C , capacitors rated at that temperature (such as tantalums) must be used.

No capacitor must be attached to the ON/OFF and ERROR FLAG pin. Due to the internal circuits of the IC, oscillation on this pin could result.

STANDBY OUTPUT

The LM2935 differs from most fixed voltage regulators in that it is equipped with two regulator outputs instead of one. The additional output is intended for use in systems requiring standby memory circuits. While the high current regulator output can be controlled with the ON/OFF pin described below, the standby output remains on under all conditions as long as sufficient input voltage is applied to the IC. Thus, memory and other circuits powered by this output remain unaffected by positive line transients, thermal shutdown, etc.

The standby regulator circuit is designed so that the quiescent current to the IC is very low ($<3\text{ mA}$) when the other regulator output is off.

In applications where the standby output is not needed, it may be disabled by connecting a resistor from the standby output to the supply voltage. This eliminates the need for a

more expensive capacitor on the output to prevent unwanted oscillations. The value of the resistor depends upon the minimum input voltage expected for a given system. Since the standby output is shunted with an internal 5.7V zener (Figure 6), the current through the external resistor should be sufficient to bias R2 and R3 up to this point. Approximately 60 μA will suffice, resulting in a 10k external resistor for most applications (Figure 3).

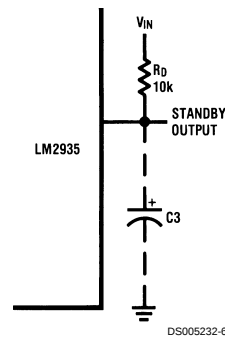


FIGURE 3. Disabling Standby Output to Eliminate C3

HIGH CURRENT OUTPUT

Unlike the standby regulated output, which must remain on whenever possible, the high current regulated output is fault protected against overvoltage and also incorporates thermal shutdown. If the input voltage rises above approximately 30V (e.g., load dump), this output will automatically shutdown. This protects the internal circuitry and enables the IC to survive higher voltage transients than would otherwise be expected. Thermal shutdown is effective against die overheating since the high current output is the dominant source of power dissipation in the IC.

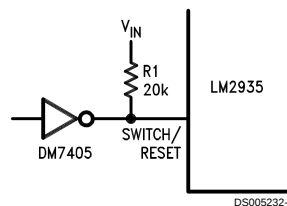


FIGURE 4. Controlling ON/OFF Terminal with a Typical Open Collector Logic Gate

ON/OFF AND ERROR FLAG PIN

This pin has the ability to serve a dual purpose if desired. When controlled in the manner shown in Figure 1 (common in automotive systems where S1 is the ignition switch), the pin also serves as an output flag that is active low whenever a fault condition is detected with the high current regulated output. In other words, under normal operating conditions, the output voltage of this pin is high (5V). This is set by an internal clamp. If the high current output becomes unregulated for any reason (line transients, short circuit, thermal shutdown, low input voltage, etc.) the pin switches to the active low state, and is capable of sinking several milliamps. This output signal can be used to initiate any reset or start-up procedure that may be required of the system.

Application Hints (Continued)

The ON/OFF pin can also be driven directly from open collector logic circuits. The only requirement is that the 20k

pull-up resistor remain in place *Figure 4*). This will not affect the logic gate since the voltage on this pin is limited by the internal clamp in the LM2935 to 5V.


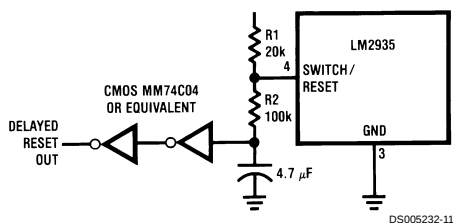



FIGURE 5. Reset Pulse on Power-Up
(with approximately 300 ms delay)

Circuit Schematic

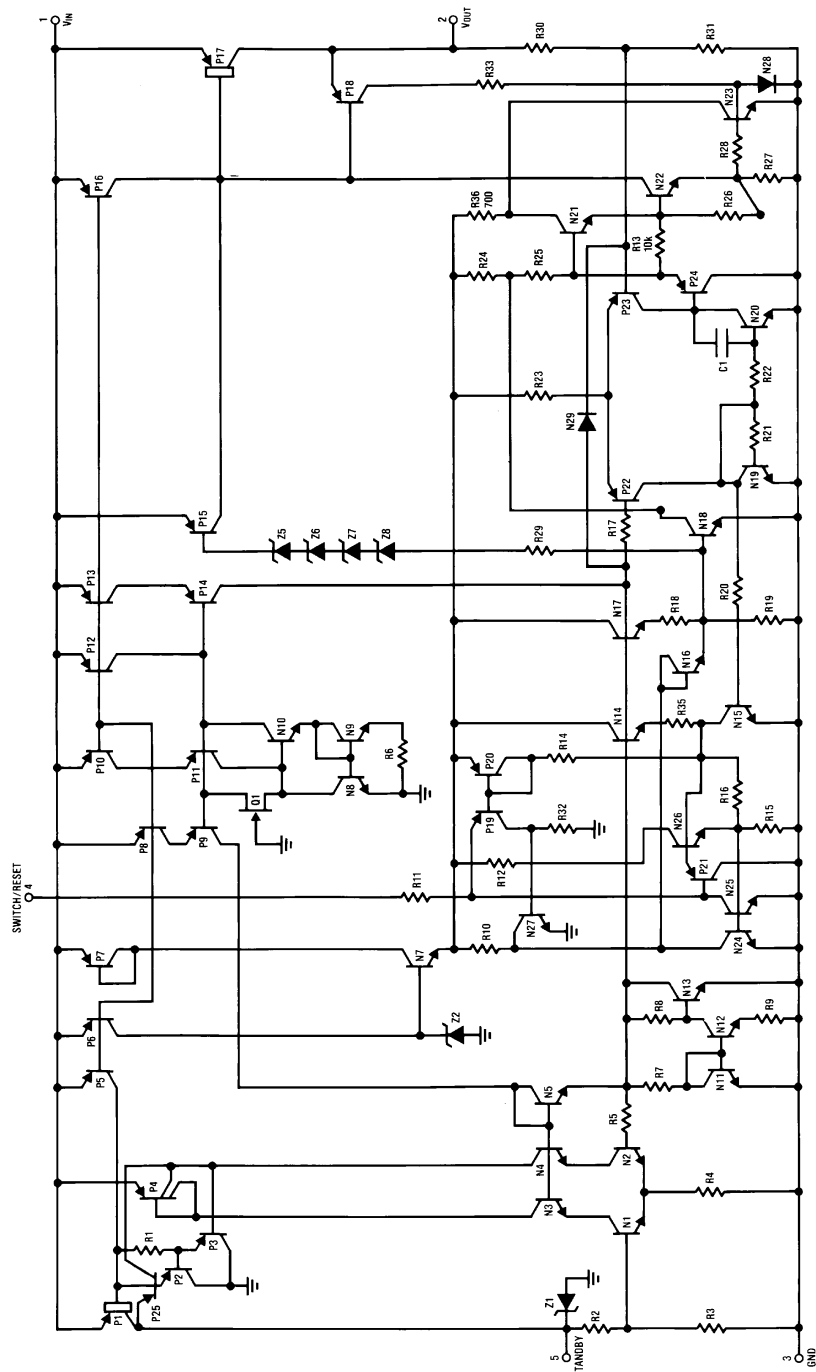

DS006232-5

FIGURE 6.

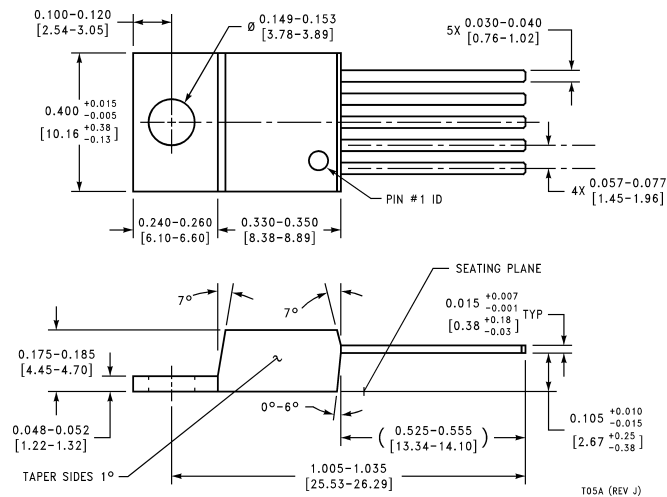Physical Dimensions inches (millimeters) unless otherwise noted

5-Lead TO-220 Power Package (T)
Order Number LM2935T
NS Package Number T05A

T05A (REV J)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe

Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group

Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.

Tel: 81-3-5620-6175
Fax: 81-3-5620-6179