




0.560-INCH SEVEN SEGMENT DISPLAYS

RED MAN6700 SERIES

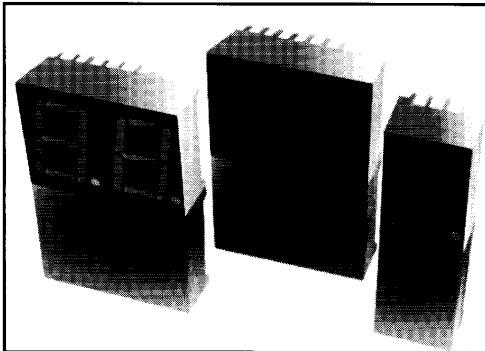

DESCRIPTION

The MAN6700 Series is a family of large digits which includes double and single digits. The series features the sculptured font which minimizes "gappiness" at the segment intersections. Available models include two-digit, one and one-half digits with polarity sign, and single digits. All models have right hand decimal points and are available in common anode or common cathode configuration. Units are constructed with Black face and Red segment color.

FEATURES

- High performance GaAsP
- Large, easy to read, digits
- Common anode or common cathode models
- Also available in Orange (MAN6600 Series)
- Fast switching — excellent for multiplexing
- Low power consumption
- Bold solid segments that are highly legible
- Solid state reliability — long operation life
- Rugged plastic construction
- Directly compatible with integrated circuits
- High brightness with high contrast
- Categorized for Luminous Intensity (See Note 7)
- Wide viewing angle...150°
- Standard double-dip lead configuration
- Low forward voltage

APPLICATIONS

For industrial and consumer applications such as:

- Two-digit package simplifies alignment and assembly
- Digital readout displays
- Instrument panels
- Point of sale equipment
- Digital clocks
- TV and radios

MODEL NUMBERS

PART NUMBER	COLOR	DESCRIPTION	PACKAGE DRAWING	PIN OUT SPECIFICATION
MAN6710	Red	2 Digit; Common Anode; Rt. Hand Decimal	A	A
MAN6730	Red	1½ Digit; Common Anode; Overflow ±1.8; Rt. Hand Decimal	B	B
MAN6740	Red	2 Digit; Common Cathode; Rt. Hand Decimal	A	C
MAN6750	Red	1½ Digit; Common Cathode; Overflow ±1.8; Rt. Hand Decimal	B	D
MAN6760	Red	Single Digit; Common Anode; Rt. Hand Decimal	C	E
MAN6780	Red	Single Digit; Common Cathode; Rt. Hand Decimal	C	F

RECOMMENDED OPTICAL FILTERS

For optimum ON and OFF contrast, one of the following filters or equivalents should be used over the display:

DEVICE TYPE	FILTER
MAN6700 Series	Panelgraphic Red 60 Homalite 100-1605



0.560-INCH SEVEN SEGMENT DISPLAYS

ELECTRO-OPTICAL CHARACTERISTICS

(Per Diode at 25°C Free Air Temperature Unless Otherwise Specified)

	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
Luminous Intensity, digit average (See Note 1)	125	420		μCd	$I_F = 10 \text{ mA}$
Peak emission wavelength		650		nm	
Spectral line half width		20		nm	
Forward voltage					
Segment			2.0	V	$I_F = 20 \text{ mA}$
Decimal point			2.0	V	$I_F = 20 \text{ mA}$
Dynamic resistance					
Segment		2		Ω	$I_F = 20 \text{ mA}$
Decimal point		2		Ω	$I_F = 20 \text{ mA}$
Capacitance					
Segment		35		pF	$V = 0$
Decimal point		35		pF	$V = 0$
Reverse current					
Segment			100	μA	$V_R = 5.0 \text{ V}$
Decimal point			100	μA	$V_R = 5.0 \text{ V}$
Segment C or D of "+" (6730/6750)			100	μA	$V_R = 5.0 \text{ V}$

ABSOLUTE MAXIMUM RATINGS

	MAN6710 MAN6740	MAN6730 MAN6750	MAN6760 MAN6780
Power dissipation at 25°C ambient	960 mW	840 mW	480 mW
Derate linearly from 25°C	-13.7 mW/°C	-12.0 mW/°C	-6.9 mW/°C
Storage and operating temperature	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Continuous forward current			
Total	480 mA	420 mA	240 mA
Per segment	30 mA	30 mA	30 mA
Decimal point	30 mA	30 mA	30 mA
Reverse voltage			
Per segment	6.0 V	6.0 V	6.0 V
Decimal point	6.0 V	6.0 V	6.0 V
Soldering time at 260°C (See Notes 3 and 4)	5 sec.	5 sec.	5 sec.

TYPICAL THERMAL CHARACTERISTICS

Thermal resistance junction to free air Φ_{JA}	160°C/W
Wavelength temperature coefficient (case temperature)	3.0Å/°C
Forward voltage temperature coefficient	-2.0 mV/°C

NOTES

1. The digit average Luminous Intensity is obtained by summing the Luminous Intensity of each segment and dividing by the total number of segments. Intensity will not vary more than $\pm 33.3\%$ between all segments within a digit.
2. The curve in Figure 3 is normalized to the brightness at 25°C to indicate the relative efficiency over the operating temperature range.
3. Leads of the device immersed to 1/16 inch from the body. Maximum device surface temperature is 140°C.
4. For flux removal, Freon TF, Freon TE, Isopropanol or water may be used up to their boiling points.
5. Pins 3 and 8 on MAN6760 and MAN6780 are redundant anodes or cathodes.
6. All displays are categorized for Luminous Intensity. The Intensity category is marked on each part as a suffix letter to the part number.



The image contains two sets of technical drawings for electronic components, labeled C1185A and C1186B. Each set includes a top view, a bottom view, and a side view with dimensions in both inches and millimeters.

Component C1185A:

- Top View:** Shows a rectangular component with a width of .985" (25.02 mm) and a height of .750" (19.05 mm). It features two internal rectangular structures, each .500" (12.70 mm) wide. Dimensions include .320" (8.13 mm) for the internal structure width, .065" DIA (1.68 mm) for the internal structure height, .560" (14.22 mm) for the overall height, .315" (8.00 mm) for the pin pitch, .050" (1.27 mm) for the pin width, .020" (0.51 mm) for the pin spacing, and .004" (0.10 mm) for the pin thickness. Labels include "DIGIT #1", "DATE CODE", "LIGHT INTENSITY CAT", "PART NO.", "XYZ", and "PIN #1".
- Bottom View:** Shows the component from the bottom, with labels for "PIN #1", "PIN #9", and "PIN #10".
- Side View:** Shows the component's profile with a total height of .160" (4.06 mm) and a base width of .600" (15.24 mm). It includes a .010" (0.25 mm) wide base and a .007" (0.18 mm) wide base.

Component C1186B:

- Top View:** Shows a rectangular component with a width of .480" (12.20 mm) and a height of .750" (19.05 mm). It features a single internal rectangular structure, .320" (8.13 mm) wide. Dimensions include .560" (14.22 mm) for the overall height, .315" (8.00 mm) for the pin pitch, .050" (1.27 mm) for the pin width, .020" (0.51 mm) for the pin spacing, and .004" (0.10 mm) for the pin thickness. Labels include "DATE CODE", "LIGHT INTENSITY CAT", "PART NO.", "XYZ", and "PIN #1".
- Bottom View:** Shows the component from the bottom, with labels for "PIN #1" and "PIN #6".
- Side View:** Shows the component's profile with a total height of .160" (4.06 mm) and a base width of .600" (15.24 mm). It includes a .010" (0.25 mm) wide base and a .007" (0.18 mm) wide base.

Pin No.	ELECTRICAL CONNECTIONS					
	A MAN6710	B MAN6730	C MAN6740	D MAN6750	E MAN6760	F MAN6780
1	Cathode E 1	Cathode C 1	Anode E 1	Anode C 1	Cathode E	Anode E
2	Cathode D 1	Cathode D 1	Anode D 1	Anode D 1	Cathode D	Anode D
3	Cathode C 1	Cathode B 1	Anode C 1	Anode B 1	Com. Anode	Com. Cathode
4	Cathode D.P. 1	Cathode D.P. 1	Anode D.P. 1	Anode D.P. 1	Cathode C	Anode C
5	Cathode E 2	Cathode E 2	Anode E 2	Anode E 2	Cathode D.P.	Anode D.P.
6	Cathode D 2	Cathode D 2	Anode D 2	Anode D 2	Cathode B	Anode B
7	Cathode G 2	Cathode G 2	Anode G 2	Anode G 2	Cathode A	Anode A
8	Cathode C 2	Cathode C 2	Anode C 2	Anode C 2	Com. Anode	Com. Cathode
9	Cathode D.P. 2	Cathode D.P. 2	Anode D.P. 2	Anode D.P. 2	Cathode F	Anode F
10	Cathode B 2	Cathode B 2	Anode B 2	Anode B 2	Cathode G	Anode G
11	Cathode A 2	Cathode A 2	Anode A 2	Anode A 2		
12	Cathode F 2	Cathode F 2	Anode F 2	Anode F 2		
13	Anode Digit 2	Anode Digit 2	Cathode Digit 2	Cathode Digit 2		
14	Anode Digit 1	Anode Digit 1	Cathode Digit 1	Cathode Digit 1		
15	Cathode B 1	Cathode A 1	Anode B 1	Anode A 1		
16	Cathode A 1	No Connection	Anode A 1	No Connection		
17	Cathode G 1	No Connection	Anode G 1	No Connection		
18	Cathode F 1	No Connection	Anode F 1	No Connection		

TYPICAL CHARACTERISTIC CURVES




Fig. 1. Forward Current vs. Forward Voltage




Fig. 2. Relative Luminous Intensity vs. Temperature (See Note 2)




Fig. 3. Max Peak Current vs. Duty Cycle




Fig. 4. Luminous Intensity vs. Duty Cycle




Fig. 5. Relative Luminous Intensity vs. Forward Current

INTERNAL CONNECTIONS

