




## INTEGRATED T-1 3/4 RESISTOR LAMPS 5 VOLT and 12 VOLT SERIES

**RED MR3050/MR3051 TINTED**  
**HIGH EFFICIENCY RED MR3750/MR3751 TINTED**  
**YELLOW MR3350/MR3351 TINTED**  
**HIGH EFFICIENCY GREEN MR3450/MR3451 TINTED**

### PACKAGE DIMENSIONS

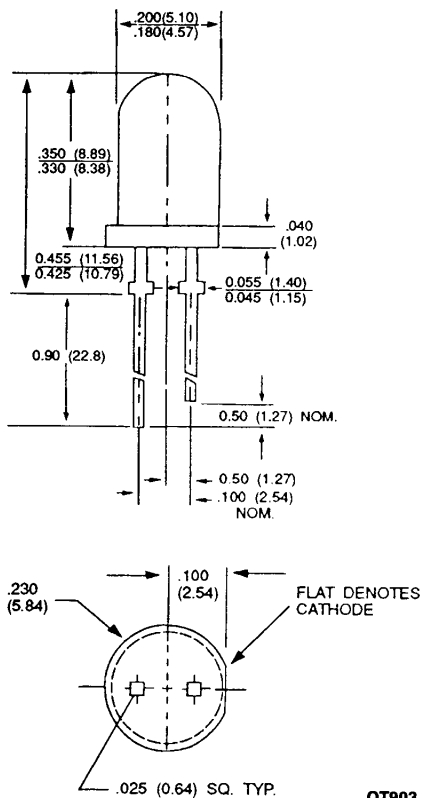

QT903

### DESCRIPTION

This group of T-1 3/4 size LED lamps contain integral resistors. Operation at 5 volts (MR3X50 Part Nos.) or 12 volts (MR3X51 Part Nos.) is possible without the use of external current limiting resistors. Color tinted, diffused epoxy packages are used for all the lamps in this group.

### FEATURES

- Integral Current Limiting Resistor  
(No external resistor required)
- TTL Compatible
- Operate with 5 Volt & 12 Volt Supplies
- All Colors - Red, HER, Yellow, Green
- Wide Viewing Angle
- Solid-State Reliability

#### NOTES:

1. ALL TOLERANCES, UNLESS OTHERWISE SPECIFIED: .XXX ± 010
2. ALL DIMENSIONS IN INCHES (MILLIMETERS)

### PHYSICAL CHARACTERISTICS

| TYPE   | SOURCE COLOR          | LENS COLOR      |
|--------|-----------------------|-----------------|
| MR3050 | Red                   | Red Diffused    |
| MR3051 | Red                   | Red Diffused    |
| MR3750 | High Efficiency Red   | Red Diffused    |
| MR3751 | High Efficiency Red   | Red Diffused    |
| MR3350 | Yellow                | Yellow Diffused |
| MR3351 | Yellow                | Yellow Diffused |
| MR3450 | High Efficiency Green | Green Diffused  |
| MR3451 | High Efficiency Green | Green Diffused  |



## INTEGRATED T-1 3/4 RESISTOR LAMPS 5 VOLT and 12 VOLT SERIES

| <b>ELECTRO-OPTICAL CHARACTERISTICS</b> (TA = 25°C Unless Otherwise Specified) |                |        |      |      |                     |      |      |        |      |                |
|-------------------------------------------------------------------------------|----------------|--------|------|------|---------------------|------|------|--------|------|----------------|
|                                                                               |                | RED    |      |      | HIGH EFFICIENCY RED |      |      | UNITS  |      | TEST CONDITION |
| PARAMETER                                                                     | SYMBOL         | MR3050 |      |      | MR3051              |      |      | MR3750 |      |                |
|                                                                               |                | MIN.   | TYP. | MAX. | MIN.                | TYP. | MAX. | MIN.   | TYP. | MAX.           |
| Luminous Intensity                                                            | I <sub>v</sub> |        |      |      | 1.0                 | 2.0  |      |        | 1.5  | 4.0            |
| Luminous Intensity                                                            | I <sub>v</sub> | 1.0    | 2.0  |      |                     |      |      | 1.5    | 4.0  |                |
| Total Viewing Angle                                                           | 2θ1/2          | 60     |      |      | 60                  |      |      | 60     |      |                |
| Peak Wavelength                                                               | λ <sub>p</sub> | 655    |      |      | 655                 |      |      | 635    |      |                |
| Spectral Line Halfwidth                                                       | Δλ1/2          | 24     |      |      | 24                  |      |      | 40     |      |                |
| Forward Current 12V Devices                                                   | I <sub>f</sub> |        |      |      |                     |      |      |        | 13   | 20             |
| Forward Current 5V Devices                                                    | I <sub>f</sub> | 13     | 20   |      | 13                  | 20   |      | 10     | 15   |                |
| Reverse Breakdown Voltage                                                     | V <sub>R</sub> | 5.0    |      |      | 5.0                 |      |      | 5.0    |      |                |

| <b>ELECTRO-OPTICAL CHARACTERISTICS</b> (TA = 25°C Unless Otherwise Specified) |                |        |      |      |                       |      |      |        |      |                |
|-------------------------------------------------------------------------------|----------------|--------|------|------|-----------------------|------|------|--------|------|----------------|
|                                                                               |                | YELLOW |      |      | HIGH EFFICIENCY GREEN |      |      | UNITS  |      | TEST CONDITION |
| PARAMETER                                                                     | SYMBOL         | MR3350 |      |      | MR3351                |      |      | MR3450 |      |                |
|                                                                               |                | MIN.   | TYP. | MAX. | MIN.                  | TYP. | MAX. | MIN.   | TYP. | MAX.           |
| Luminous Intensity                                                            | I <sub>v</sub> |        |      |      | 1.5                   | 4.0  |      |        | 1.5  | 4.0            |
| Luminous Intensity                                                            | I <sub>v</sub> | 1.5    | 4.0  |      |                       |      |      | 1.5    | 4.0  |                |
| Total Viewing Angle                                                           | 2θ1/2          | 60     |      |      | 60                    |      |      | 60     |      |                |
| Peak Wavelength                                                               | λ <sub>p</sub> | 583    |      |      | 583                   |      |      | 565    |      |                |
| Spectral Line Halfwidth                                                       | Δλ1/2          | 36     |      |      | 36                    |      |      | 28     |      |                |
| Forward Current 12V Devices                                                   | I <sub>f</sub> |        |      |      | 13                    | 20   |      |        | 13   | 20             |
| Forward Current 5V Devices                                                    | I <sub>f</sub> | 10     | 15   |      |                       |      |      | 12     | 15   |                |
| Reverse Breakdown Voltage                                                     | V <sub>R</sub> | 5.0    |      |      | 5.0                   |      |      | 5.0    |      |                |

| <b>ABSOLUTE MAXIMUM RATINGS</b> (TA = 25°C Unless Otherwise Specified) |                                |                                 |                       |                        |
|------------------------------------------------------------------------|--------------------------------|---------------------------------|-----------------------|------------------------|
|                                                                        | RED/HER/YELLOW<br>5 VOLT LAMPS | RED/HER/YELLOW<br>12 VOLT LAMPS | GREEN<br>5 VOLT LAMPS | GREEN<br>12 VOLT LAMPS |
| DC Forward Voltage (TA=25°C)                                           | 7.5 Volts                      | 15 Volts                        | 7.5 Volts             | 15 Volts               |
| Reverse Voltage (I <sub>R</sub> =100 μA)                               | 5 Volts                        | 5 Volts                         | 5 Volts               | 5 Volts                |
| Operating Temperature Range                                            | -40°C to +85°C                 | -40°C to +85°C                  | -20°C to +85°C        | -20°C to +85°C         |
| Storage Temperature Range                                              | -55°C to +100°C                | -55°C to +100°C                 | -55°C to +100°C       | -55°C to +100°C        |
| Lead Soldering Temperature                                             | 260°C for 5 seconds            |                                 |                       |                        |

# **INTEGRATED T-1 3/4 RESISTOR LAMPS** **5 VOLT and 12 VOLT SERIES**

## **TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES**

(TA = 25°C Unless Otherwise Specified)




Fig. 1. Forward Current vs. Applied Forward Voltage 5 Volt Devices




Fig. 2. Forward Current vs. Applied Forward Voltage 12 Volt Devices




Fig. 3. Maximum Allowed Applied Forward Voltage vs. Ambient Temperature  
RθJA = 175°C/W 5 Volt Devices

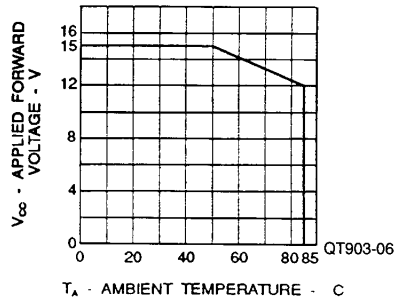


Fig. 4. Maximum Allowed Applied Forward Voltage vs. Ambient Temperature  
RθJA = 175°C/W 12 Volt Devices

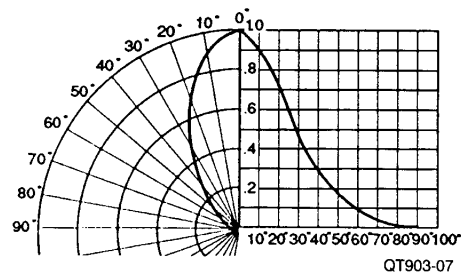


Fig. 5. Relative Luminous Intensity vs. Angular Displacement for T-1 3/4 Package

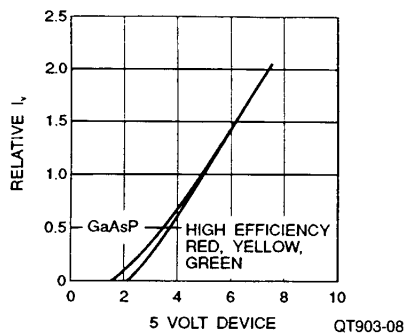


Fig. 6. Relative Luminous Intensity vs. Applied Forward Voltage 5 Volt Devices

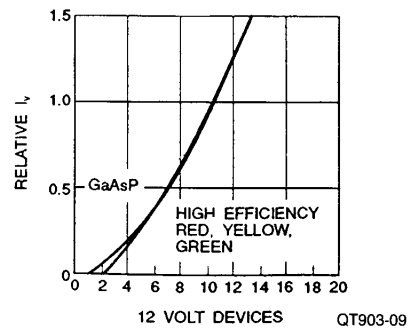


Fig. 7. Relative Luminous Intensity vs. Applied Forward Voltage 12 Volt Devices