

December 1992

## CMOS Dual 'D'-Type Flip-Flop

### Features

- High-Voltage Type (20V Rating)
- Set-Reset Capability
- Static Flip-Flop Operation - Retains State Indefinitely With Clock Level Either "High" Or "Low"
- Medium-Speed Operation - 16 MHz (typ.) Clock Toggle Rate at 10V
- Standardized Symmetrical Output Characteristics
- 100% Tested for Quiescent Current at 20V
- Maximum Input Current of 1 $\mu$ A at 18V Over Full Package Temperature Range; 100nA at 18V and +25°C
- Noise Margin (Over Full Package Temperature Range):
  - 1V at VDD = 5V
  - 2V at VDD = 10V
  - 2.5V at VDD = 15V
- 5V, 10V and 15V Parametric Ratings
- Meets All Requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"

### Applications

- Registers
- Counters
- Control Circuits


### Description

CD4013BMS consists of two identical, independent data type flip-flops. Each flip-flop has independent data, set, reset, and clock inputs and Q and  $\bar{Q}$  outputs. These devices can be used for shift register applications, and, by connecting  $\bar{Q}$  output to the data input, for counter and toggle applications. The logic level present at the D input is transferred to the Q output during the positive going transition of the clock pulse. Setting or resetting is independent of the clock and is accomplished by a high level on the set or reset line, respectively.


The CD4013BMS is supplied in these 14 lead outline packages:

|                  |     |
|------------------|-----|
| Braze Seal DIP   | H4Q |
| Frit Seal DIP    | H1B |
| Ceramic Flatpack | H3W |

### Pinout

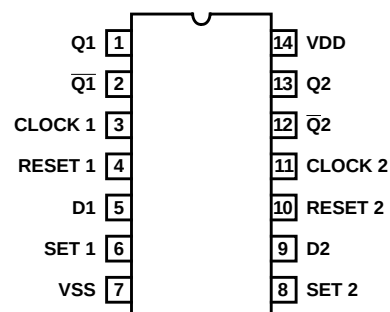

### Functional Diagram

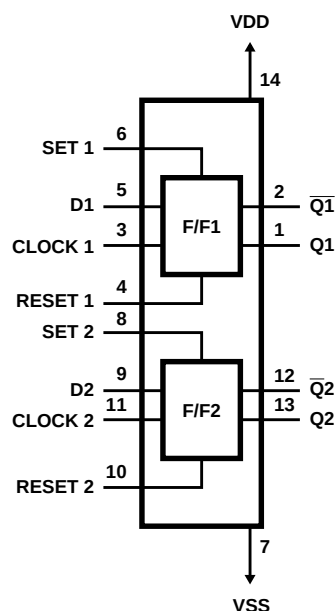

## Specifications CD4013BMS

### Absolute Maximum Ratings

DC Supply Voltage Range, (VDD) ..... -0.5V to +20V  
 (Voltage Referenced to VSS Terminals)  
 Input Voltage Range, All Inputs ..... -0.5V to VDD +0.5V  
 DC Input Current, Any One Input. .... ±10mA  
 Operating Temperature Range ..... -55°C to +125°C  
 Package Types D, F, K, H  
 Storage Temperature Range (TSTG) ..... -65°C to +150°C  
 Lead Temperature (During Soldering) ..... +265°C  
 At Distance 1/16 ± 1/32 Inch (1.59mm ± 0.79mm) from case for  
 10s Maximum

### Reliability Information

Thermal Resistance .....  $\theta_{ja}$   $\theta_{jc}$   
 Ceramic DIP and FRIT Package ..... 80°C/W 20°C/W  
 Flatpack Package ..... 70°C/W 20°C/W  
 Maximum Package Power Dissipation (PD) at +125°C  
 For TA = -55°C to +100°C (Package Type D, F, K) ..... 500mW  
 For TA = +100°C to +125°C (Package Type D, F, K) ..... Derate  
 Linearity at 12mW/°C to 200mW  
 Device Dissipation per Output Transistor ..... 100mW  
 For TA = Full Package Temperature Range (All Package Types)  
 Junction Temperature ..... +175°C

**TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS**

| PARAMETER                      | SYMBOL | CONDITIONS (NOTE 1)                   |           | GROUP A<br>SUBGROUPS | TEMPERATURE          | LIMITS         |                | UNITS |
|--------------------------------|--------|---------------------------------------|-----------|----------------------|----------------------|----------------|----------------|-------|
|                                |        |                                       |           |                      |                      | MIN            | MAX            |       |
| Supply Current                 | IDD    | VDD = 20V, VIN = VDD or GND           |           | 1                    | +25°C                | -              | 2              | μA    |
|                                |        |                                       |           | 2                    | +125°C               | -              | 200            | μA    |
|                                |        | VDD = 18V, VIN = VDD or GND           |           | 3                    | -55°C                | -              | 2              | μA    |
| Input Leakage Current          | IIL    | VIN = VDD or GND                      | VDD = 20  | 1                    | +25°C                | -100           | -              | nA    |
|                                |        |                                       |           | 2                    | +125°C               | -1000          | -              | nA    |
|                                |        |                                       | VDD = 18V | 3                    | -55°C                | -100           | -              | nA    |
| Input Leakage Current          | IIH    | VIN = VDD or GND                      | VDD = 20  | 1                    | +25°C                | -              | 100            | nA    |
|                                |        |                                       |           | 2                    | +125°C               | -              | 1000           | nA    |
|                                |        |                                       | VDD = 18V | 3                    | -55°C                | -              | 100            | nA    |
| Output Voltage                 | VOL15  | VDD = 15V, No Load                    |           | 1, 2, 3              | +25°C, +125°C, -55°C | -              | 50             | mV    |
| Output Voltage                 | VOH15  | VDD = 15V, No Load (Note 3)           |           | 1, 2, 3              | +25°C, +125°C, -55°C | 14.95          | -              | V     |
| Output Current (Sink)          | IOL5   | VDD = 5V, VOUT = 0.4V                 |           | 1                    | +25°C                | 0.53           | -              | mA    |
| Output Current (Sink)          | IOL10  | VDD = 10V, VOUT = 0.5V                |           | 1                    | +25°C                | 1.4            | -              | mA    |
| Output Current (Sink)          | IOL15  | VDD = 15V, VOUT = 1.5V                |           | 1                    | +25°C                | 3.5            | -              | mA    |
| Output Current (Source)        | IOH5A  | VDD = 5V, VOUT = 4.6V                 |           | 1                    | +25°C                | -              | -0.53          | mA    |
| Output Current (Source)        | IOH5B  | VDD = 5V, VOUT = 2.5V                 |           | 1                    | +25°C                | -              | -1.8           | mA    |
| Output Current (Source)        | IOH10  | VDD = 10V, VOUT = 9.5V                |           | 1                    | +25°C                | -              | -1.4           | mA    |
| Output Current (Source)        | IOH15  | VDD = 15V, VOUT = 13.5V               |           | 1                    | +25°C                | -              | -3.5           | mA    |
| N Threshold Voltage            | VNTH   | VDD = 10V, ISS = -10μA                |           | 1                    | +25°C                | -2.8           | -0.7           | V     |
| P Threshold Voltage            | VPTH   | VSS = 0V, IDD = 10μA                  |           | 1                    | +25°C                | 0.7            | 2.8            | V     |
| Functional                     | F      | VDD = 2.8V, VIN = VDD or GND          |           | 7                    | +25°C                | VOH ><br>VDD/2 | VOL <<br>VDD/2 | V     |
|                                |        | VDD = 20V, VIN = VDD or GND           |           | 7                    | +25°C                |                |                |       |
|                                |        | VDD = 18V, VIN = VDD or GND           |           | 8A                   | +125°C               |                |                |       |
|                                |        | VDD = 3V, VIN = VDD or GND            |           | 8B                   | -55°C                |                |                |       |
| Input Voltage Low<br>(Note 2)  | VIL    | VDD = 5V, VOH > 4.5V, VOL < 0.5V      |           | 1, 2, 3              | +25°C, +125°C, -55°C | -              | 1.5            | V     |
| Input Voltage High<br>(Note 2) | VIH    | VDD = 5V, VOH > 4.5V, VOL < 0.5V      |           | 1, 2, 3              | +25°C, +125°C, -55°C | 3.5            | -              | V     |
| Input Voltage Low<br>(Note 2)  | VIL    | VDD = 15V, VOH > 13.5V,<br>VOL < 1.5V |           | 1, 2, 3              | +25°C, +125°C, -55°C | -              | 4              | V     |
| Input Voltage High<br>(Note 2) | VIH    | VDD = 15V, VOH > 13.5V,<br>VOL < 1.5V |           | 1, 2, 3              | +25°C, +125°C, -55°C | 11             | -              | V     |

NOTES: 1. All voltages referenced to device GND, 100% testing being implemented.  
 2. Go/No Go test with limits applied to inputs  
 3. For accuracy, voltage is measured differentially to VDD. Limit is 0.050V max.

## Specifications CD4013BMS

**TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS**

| PARAMETER                                          | SYMBOL         | CONDITIONS (NOTE 1, 2)     | GROUP A<br>SUBGROUPS | TEMPERATURE   | LIMITS   |     | UNITS |
|----------------------------------------------------|----------------|----------------------------|----------------------|---------------|----------|-----|-------|
|                                                    |                |                            |                      |               | MIN      | MAX |       |
| Propagation Delay<br>Clock to Q, $\bar{Q}$         | TPHL1<br>TPLH1 | VDD = 5V, VIN = VDD or GND | 9                    | +25°C         | -        | 300 | ns    |
|                                                    |                |                            | 10, 11               | +125°C, -55°C | -        | 405 | ns    |
| Propagation Delay<br>Set to $\bar{Q}$ , Reset to Q | TPHL2          | VDD = 5V, VIN = VDD or GND | 9                    | +25°C         | -        | 400 | ns    |
|                                                    |                |                            | 10, 11               | +125°C, -55°C | -        | 540 | ns    |
| Propagation Delay<br>Set to Q, Reset to $\bar{Q}$  | TPLH2          | VDD = 5V, VIN = VDD or GND | 9                    | +25°C         | -        | 300 | ns    |
|                                                    |                |                            | 10, 11               | +125°C, -55°C | -        | 405 | ns    |
| Transition Time<br>Clock to Q, $\bar{Q}$           | TTHL<br>TTLH   | VDD = 5V, VIN = VDD or GND | 9                    | +25°C         | -        | 200 | ns    |
|                                                    |                |                            | 10, 11               | +125°C, -55°C | -        | 270 | ns    |
| Maximum Clock Input<br>Frequency                   | FCL            | VDD = 5V, VIN = VDD or GND | 9                    | +25°C         | 3.5      | -   | MHz   |
|                                                    |                |                            | 10, 11               | +125°C, -55°C | 3.5/1.35 | -   | MHz   |

NOTES:

1. VDD = 5V, CL = 50pF, RL = 200K
2. -55°C and +125°C limits guaranteed, 100% testing being implemented.

**TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS**

| PARAMETER               | SYMBOL | CONDITIONS                  | NOTES | TEMPERATURE             | LIMITS |       | UNITS |
|-------------------------|--------|-----------------------------|-------|-------------------------|--------|-------|-------|
|                         |        |                             |       |                         | MIN    | MAX   |       |
| Supply Current          | IDD    | VDD = 5V, VIN = VDD or GND  | 1, 2  | -55°C, +25°C            | -      | 1.0   | μA    |
|                         |        |                             |       | +125°C                  | -      | 30    | μA    |
|                         |        | VDD = 10V, VIN = VDD or GND | 1, 2  | -55°C, +25°C            | -      | 2.0   | μA    |
|                         |        |                             |       | +125°C                  | -      | 60    | μA    |
|                         |        | VDD = 15V, VIN = VDD or GND | 1, 2  | -55°C, +25°C            | -      | 2.0   | μA    |
|                         |        |                             |       | +125°C                  | -      | 120   | μA    |
| Output Voltage          | VOL    | VDD = 5V, No Load           | 1, 2  | +25°C, +125°C,<br>-55°C | -      | 50    | mV    |
| Output Voltage          | VOL    | VDD = 10V, No Load          | 1, 2  | +25°C, +125°C,<br>-55°C | -      | 50    | mV    |
| Output Voltage          | VOH    | VDD = 5V, No Load           | 1, 2  | +25°C, +125°C,<br>-55°C | 4.95   | -     | V     |
| Output Voltage          | VOH    | VDD = 10V, No Load          | 1, 2  | +25°C, +125°C,<br>-55°C | 9.95   | -     | V     |
| Output Current (Sink)   | IOL5   | VDD = 5V, VOUT = 0.4V       | 1, 2  | +125°C                  | 0.36   | -     | mA    |
|                         |        |                             |       | -55°C                   | 0.64   | -     | mA    |
| Output Current (Sink)   | IOL10  | VDD = 10V, VOUT = 0.5V      | 1, 2  | +125°C                  | 0.9    | -     | mA    |
|                         |        |                             |       | -55°C                   | 1.6    | -     | mA    |
| Output Current (Sink)   | IOL15  | VDD = 15V, VOUT = 1.5V      | 1, 2  | +125°C                  | 2.4    | -     | mA    |
|                         |        |                             |       | -55°C                   | 4.2    | -     | mA    |
| Output Current (Source) | IOH5A  | VDD = 5V, VOUT = 4.6V       | 1, 2  | +125°C                  | -      | -0.36 | mA    |
|                         |        |                             |       | -55°C                   | -      | -0.64 | mA    |
| Output Current (Source) | IOH5B  | VDD = 5V, VOUT = 2.5V       | 1, 2  | +125°C                  | -      | -1.15 | mA    |
|                         |        |                             |       | -55°C                   | -      | -1.6  | mA    |
| Output Current (Source) | IOH10  | VDD = 10V, VOUT = 9.5V      | 1, 2  | +125°C                  | -      | -0.9  | mA    |
|                         |        |                             |       | -55°C                   | -      | -4.2  | mA    |

## Specifications CD4013BMS

**TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)**

| PARAMETER                                     | SYMBOL         | CONDITIONS                    | NOTES   | TEMPERATURE          | LIMITS |      | UNITS |
|-----------------------------------------------|----------------|-------------------------------|---------|----------------------|--------|------|-------|
|                                               |                |                               |         |                      | MIN    | MAX  |       |
| Output Current (Source)                       | IOH15          | VDD = 15V, VOUT = 13.5V       | 1, 2    | +125°C               | -      | -2.4 | mA    |
|                                               |                |                               |         | -55°C                | -      | -4.2 | mA    |
| Input Voltage Low                             | VIL            | VDD = 10V, VOH > 9V, VOL < 1V | 1, 2    | +25°C, +125°C, -55°C | -      | 3    | V     |
| Input Voltage High                            | VIH            | VDD = 10V, VOH > 9V, VOL < 1V | 1, 2    | +25°C, +125°C, -55°C | +7     | -    | V     |
| Propagation Delay Clock to Q, $\bar{Q}$       | TPHL1<br>TPLH1 | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 130  | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 90   | ns    |
| Propagation Delay Set to $\bar{Q}$ Reset to Q | TPHL2          | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 170  | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 120  | ns    |
| Propagation Delay Set to Q Reset to $\bar{Q}$ | TPLH2          | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 130  | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 90   | ns    |
| Transition Time Clock to Q, $\bar{Q}$         | TTHL<br>TTLH   | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 100  | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 80   | ns    |
| Maximum Clock Input Frequency                 | FCL            | VDD = 10V                     | 1, 2, 3 | +25°C                | 8      | -    | MHz   |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | 12     | -    | MHz   |
| Minimum Data Setup Time                       | TS             | VDD = 5V                      | 1, 2, 3 | +25°C                | -      | 40   | ns    |
|                                               |                | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 20   | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 15   | ns    |
| Minimum Clock Pulse Width                     | TW             | VDD = 5V                      | 1, 2, 3 | +25°C                | -      | 140  | ns    |
|                                               |                | VDD = 10V                     | 1, 2, 3 | +25°C                | -      | 60   | ns    |
|                                               |                | VDD = 15V                     | 1, 2, 3 | +25°C                | -      | 40   | ns    |
| Minimum Set or Reset Pulse Width              | TW             | VDD = 5V                      | 2, 3    | +25°C                | -      | 180  | ns    |
|                                               |                | VDD = 10V                     | 2, 3    | +25°C                | -      | 80   | ns    |
|                                               |                | VDD = 15V                     | 2, 3    | +25°C                | -      | 50   | ns    |
| Input Capacitance                             | CIN            | Any Input                     | 1, 2    | +25°C                | -      | 7.5  | pF    |

**NOTES:**

1. All voltages referenced to device GND.
2. The parameters listed on Table 3 are controlled via design or process and are not directly tested. These parameters are characterized on initial design release and upon design changes which would affect these characteristics.
3. CL = 50pF, RL = 200K, Input TR, TF < 20ns.

**TABLE 4. POST IRRADIATION ELECTRICAL PERFORMANCE CHARACTERISTICS**

| PARAMETER           | SYMBOL | CONDITIONS                  | NOTES | TEMPERATURE | LIMITS |      | UNITS |
|---------------------|--------|-----------------------------|-------|-------------|--------|------|-------|
|                     |        |                             |       |             | MIN    | MAX  |       |
| Supply Current      | IDD    | VDD = 20V, VIN = VDD or GND | 1, 4  | +25°C       | -      | 7.5  | μA    |
| N Threshold Voltage | VNTH   | VDD = 10V, ISS = -10μA      | 1, 4  | +25°C       | -2.8   | -0.2 | V     |

## Specifications CD4013BMS

**TABLE 4. POST IRRADIATION ELECTRICAL PERFORMANCE CHARACTERISTICS**

| PARAMETER                 | SYMBOL           | CONDITIONS                   | NOTES      | TEMPERATURE | LIMITS      |                    | UNITS |
|---------------------------|------------------|------------------------------|------------|-------------|-------------|--------------------|-------|
|                           |                  |                              |            |             | MIN         | MAX                |       |
| N Threshold Voltage Delta | $\Delta V_{NTH}$ | VDD = 10V, ISS = -10 $\mu$ A | 1, 4       | +25°C       | -           | $\pm 1$            | V     |
| P Threshold Voltage       | V <sub>PTH</sub> | VSS = 0V, IDD = 10 $\mu$ A   | 1, 4       | +25°C       | 0.2         | 2.8                | V     |
| P Threshold Voltage Delta | $\Delta V_{PTH}$ | VSS = 0V, IDD = 10 $\mu$ A   | 1, 4       | +25°C       | -           | $\pm 1$            | V     |
| Functional                | F                | VDD = 18V, VIN = VDD or GND  | 1          | +25°C       | VOH > VDD/2 | VOL < VDD/2        | V     |
|                           |                  | VDD = 3V, VIN = VDD or GND   |            |             |             |                    |       |
| Propagation Delay Time    | TPHL<br>TPLH     | VDD = 5V                     | 1, 2, 3, 4 | +25°C       | -           | 1.35 x +25°C Limit | ns    |

NOTES: 1. All voltages referenced to device GND. 2. CL = 50pF, RL = 200K, Input TR, TF < 20ns. 3. See Table 2 for +25°C limit. 4. Read and Record

**TABLE 5. BURN-IN AND LIFE TEST DELTA PARAMETERS +25°C**

| PARAMETER               | SYMBOL | DELTA LIMIT                   |
|-------------------------|--------|-------------------------------|
| Supply Current - MSI-1  | IDD    | $\pm 0.2\mu$ A                |
| Output Current (Sink)   | IOL5   | $\pm 20\%$ x Pre-Test Reading |
| Output Current (Source) | IOH5A  | $\pm 20\%$ x Pre-Test Reading |

**TABLE 6. APPLICABLE SUBGROUPS**

| CONFORMANCE GROUP             |              | MIL-STD-883 METHOD | GROUP A SUBGROUPS                     | READ AND RECORD              |
|-------------------------------|--------------|--------------------|---------------------------------------|------------------------------|
| Initial Test (Pre Burn-In)    |              | 100% 5004          | 1, 7, 9                               | IDD, IOL5, IOH5A             |
| Interim Test 1 (Post Burn-In) |              | 100% 5004          | 1, 7, 9                               | IDD, IOL5, IOH5A             |
| Interim Test 2 (Post Burn-In) |              | 100% 5004          | 1, 7, 9                               | IDD, IOL5, IOH5A             |
| PDA (Note 1)                  |              | 100% 5004          | 1, 7, 9, Deltas                       |                              |
| Interim Test 3 (Post Burn-In) |              | 100% 5004          | 1, 7, 9                               | IDD, IOL5, IOH5A             |
| PDA (Note 1)                  |              | 100% 5004          | 1, 7, 9, Deltas                       |                              |
| Final Test                    |              | 100% 5004          | 2, 3, 8A, 8B, 10, 11                  |                              |
| Group A                       |              | Sample 5005        | 1, 2, 3, 7, 8A, 8B, 9, 10, 11         |                              |
| Group B                       | Subgroup B-5 | Sample 5005        | 1, 2, 3, 7, 8A, 8B, 9, 10, 11, Deltas | Subgroups 1, 2, 3, 9, 10, 11 |
|                               | Subgroup B-6 | Sample 5005        | 1, 7, 9                               |                              |
| Group D                       |              | Sample 5005        | 1, 2, 3, 8A, 8B, 9                    | Subgroups 1, 2 3             |

NOTE: 1. 5% Parametric, 3% Functional; Cumulative for Static 1 and 2.

**TABLE 7. TOTAL DOSE IRRADIATION**

| CONFORMANCE GROUPS | MIL-STD-883 METHOD | TEST      |            | READ AND RECORD |            |
|--------------------|--------------------|-----------|------------|-----------------|------------|
|                    |                    | PRE-IRRAD | POST-IRRAD | PRE-IRRAD       | POST-IRRAD |
| Group E Subgroup 2 | 5005               | 1, 7, 9   | Table 4    | 1, 9            | Table 4    |

Specifications CD4013BMS

TABLE 8. BURN-IN AND IRRADIATION TEST CONNECTIONS

| FUNCTION                  | OPEN         | GROUND     | VDD           | 9V ± -0.5V   | OSCILLATOR |       |
|---------------------------|--------------|------------|---------------|--------------|------------|-------|
|                           |              |            |               |              | 50kHz      | 25kHz |
| Static Burn-In 1 (Note 1) | 1, 2, 12, 13 | 3-11       | 14            |              |            |       |
| Static Burn-In 2 (Note 1) | 1, 2, 12, 13 | 7          | 3-6, 8-11, 14 |              |            |       |
| Dynamic Burn-In (Note 1)  | -            | 4, 6-8, 10 | 14            | 1, 2, 12, 13 | 3, 11      | 5, 9  |
| Irradiation (Note 2)      | 1, 2, 12, 13 | 7          | 3-6, 8-11, 14 |              |            |       |

NOTE:

- Each pin except VDD and GND will have a series resistor of 10K ± 5%, VDD = 18V ± 0.5V
- Each pin except VDD and GND will have a series resistor of 47K ± 5%; Group E, Subgroup 2, sample size is 4 dice/wafer, 0 failures, VDD = 10V ± 0.5V

Logic Diagram

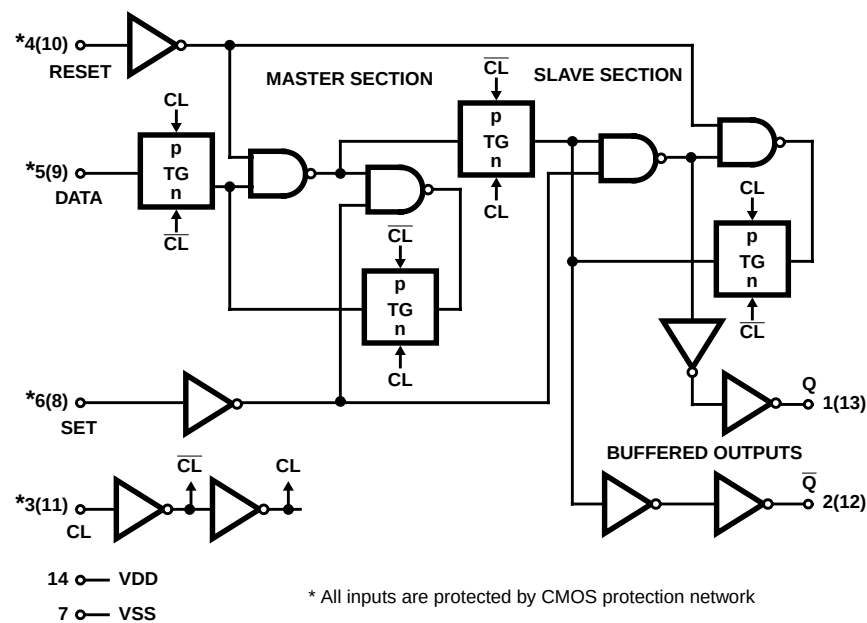


FIGURE 1. ONE OF TWO IDENTICAL FLIP-FLOPS

TRUTH TABLE

| CL* | D | R | S | Q | Q̄ |
|-----|---|---|---|---|----|
|     | 0 | 0 | 0 | 0 | 1  |
|     | 1 | 0 | 0 | 1 | 0  |
|     | X | 0 | 0 | Q | Q̄ |
| X   | X | 1 | 0 | 0 | 1  |
| X   | X | 0 | 1 | 1 | 0  |
| X   | X | 1 | 1 | 1 | 1  |

Logic 0 = Low                      \* = Level change  
Logic 1 = High                    X = Don't care  
N(N) = FF1/FF2 terminal assignments

No  
Change

## Typical Performance Characteristics

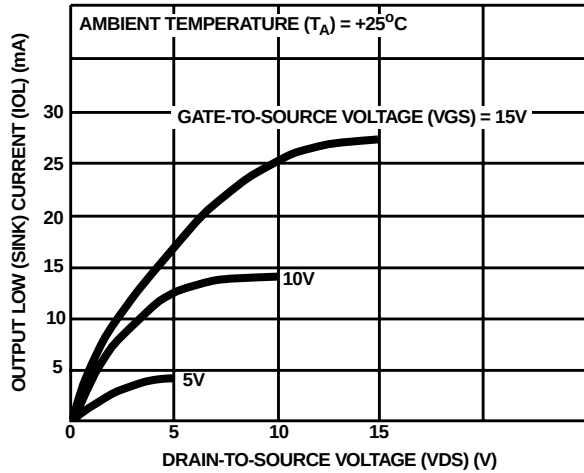


FIGURE 2. TYPICAL OUTPUT LOW (SINK) CURRENT CHARACTERISTICS

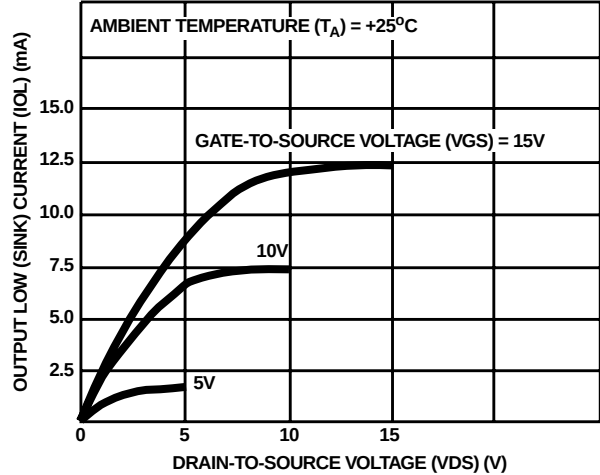


FIGURE 3. MINIMUM OUTPUT LOW (SINK) CURRENT CHARACTERISTICS

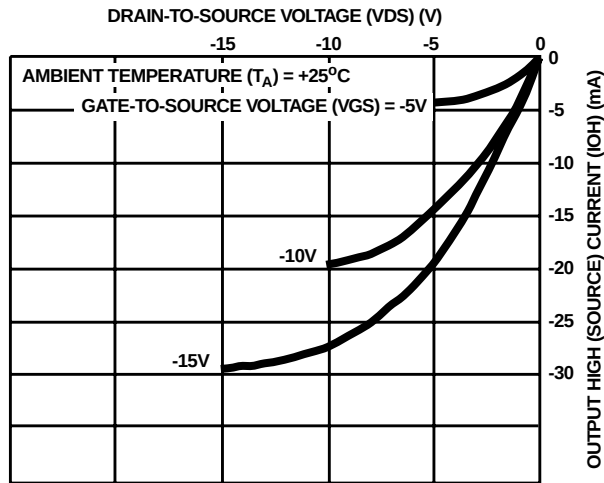


FIGURE 4. TYPICAL OUTPUT HIGH (SOURCE) CURRENT CHARACTERISTICS

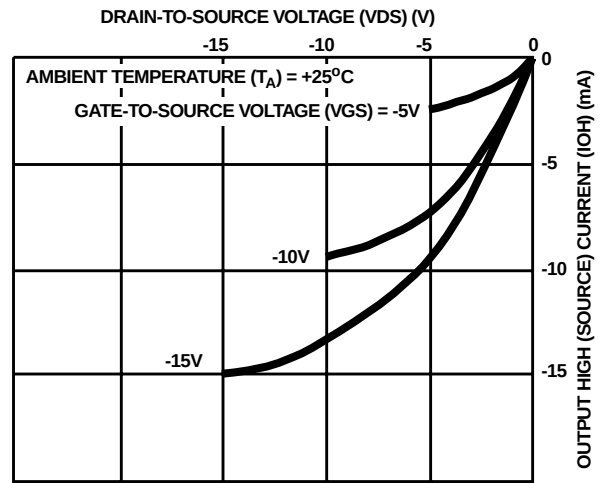


FIGURE 5. MINIMUM OUTPUT HIGH (SOURCE) CURRENT CHARACTERISTICS

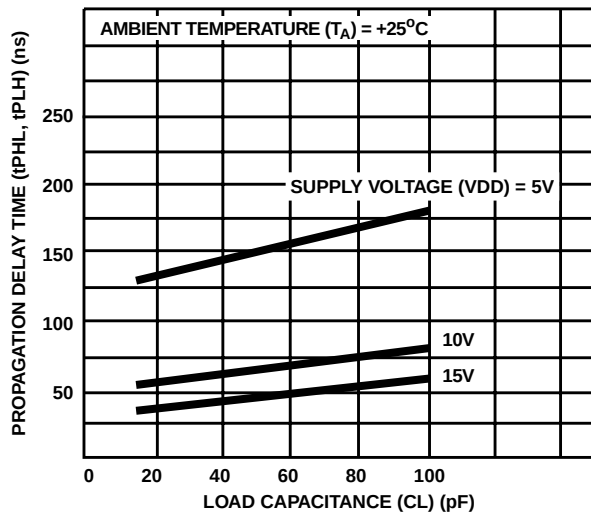


FIGURE 6. TYPICAL PROPAGATION DELAY TIME vs LOAD CAPACITANCE (CLOCK OR SET TO Q, CLOCK OR RESET TO  $\bar{Q}$ )

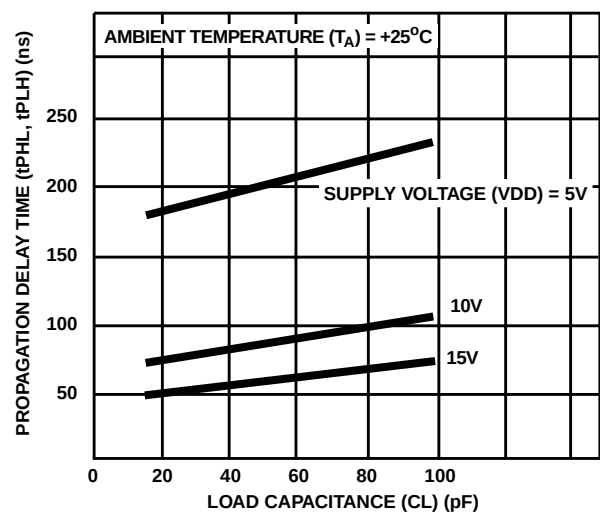


FIGURE 7. TYPICAL PROPAGATION DELAY TIME vs LOAD CAPACITANCE (SET TO  $\bar{Q}$  OR RESET TO Q)

### Typical Performance Characteristics (Continued)

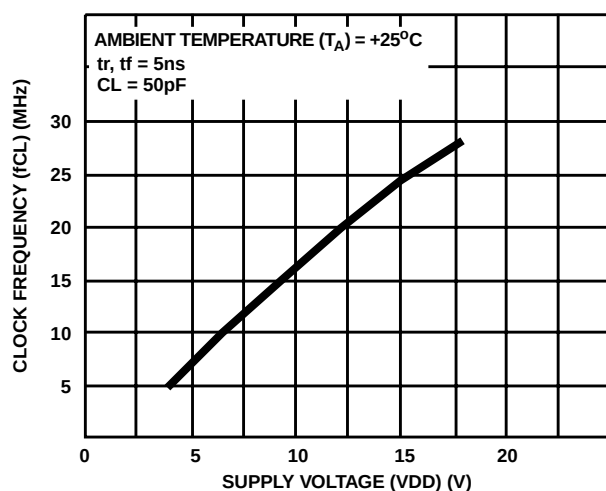


FIGURE 8. TYPICAL MAXIMUM CLOCK FREQUENCY vs SUPPLY VOLTAGE


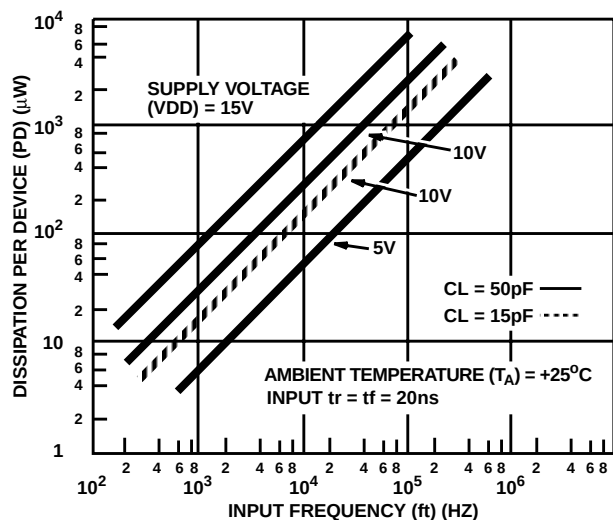


FIGURE 9. TYPICAL POWER DISSIPATION vs FREQUENCY

### Chip Dimensions and Pad Layout

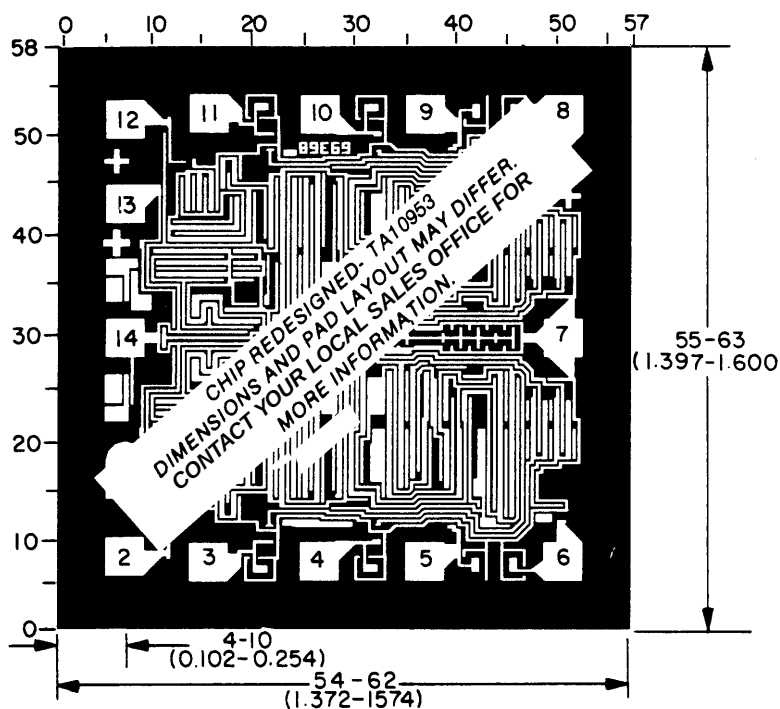

Dimension in parenthesis are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils ( $10^{-3}$  inch).

**METALLIZATION:** Thickness:  $11\text{k}\text{\AA} - 14\text{k}\text{\AA}$ , AL.

**PASSIVATION:**  $10.4\text{k}\text{\AA} - 15.6\text{k}\text{\AA}$ , Silane

**BOND PADS:** 0.004 inches X 0.004 inches MIN

**DIE THICKNESS:** 0.0198 inches - 0.0218 inches



All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see web site <http://www.intersil.com>

### **Sales Office Headquarters**

#### **NORTH AMERICA**

Intersil Corporation  
P. O. Box 883, Mail Stop 53-204  
Melbourne, FL 32902  
TEL: (321) 724-7000  
FAX: (321) 724-7240

#### **EUROPE**

Intersil SA  
Mercure Center  
100, Rue de la Fusee  
1130 Brussels, Belgium  
TEL: (32) 2.724.2111  
FAX: (32) 2.724.22.05

#### **ASIA**

Intersil (Taiwan) Ltd.  
Taiwan Limited  
7F-6, No. 101 Fu Hsing North Road  
Taipei, Taiwan  
Republic of China  
TEL: (886) 2 2716 9310  
FAX: (886) 2 2715 3029