

GENERAL DESCRIPTION

The S100-12 is designed for common emitter HF, SSB applications from a 12 volt supply. It may be operated Class A, AB or C. The device has emitter ballasting for ruggedness and reliability.

S100-12

100 WATTS - 12.5 VOLTS

1.5-30 MHz

HF COMMUNICATIONS

ABSOLUTE MAXIMUM RATINGS


Maximum Power Dissipation @ 25 C Case Temperature 250 W

Maximum Voltage and Current

BVces	Collector to Emitter Voltage	3.6 V
BVebo	Emitter to Base Voltage	4.0 V
Ic	Collector Current	50 A


Maximum Temperatures

Storage Temperature	-65 to +150 °C
Operating Temperature	+200 °C

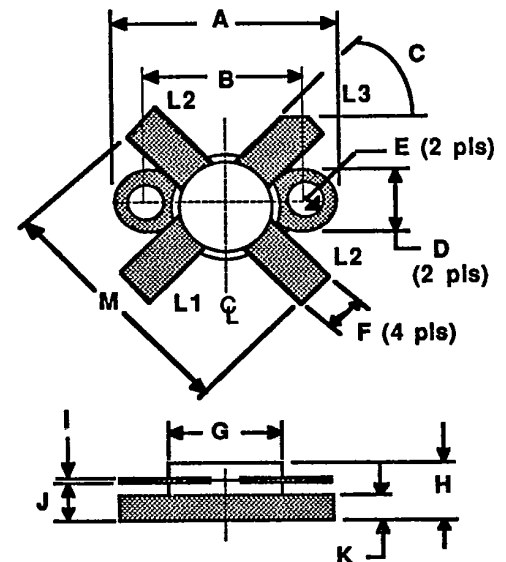

DIM	Millimeter	TOL	Inches	TOL
L1 : B				
L2 : E				
L3 : C				
A	24.76	.13	.975	.005
B	18.42	.13	.725	.005
C	45°	5°	45°	5°
D	6.35	.13	.250	.005
E	3.17 DIA	.13	.125 DIA	.005
F	5.71	.13	.225	.005
G	12.70 DIA	.13	.500 DIA	.005
H	6.60	REF	.260	REF
I	0.13	.02	.005	.001
J	4.19	.13	.165	.005
K	2.59	.13	.102	.005
M	25.40	.25	1.000	.010


POWER OUTPUT VS POWER INPUT
(TYPICAL)

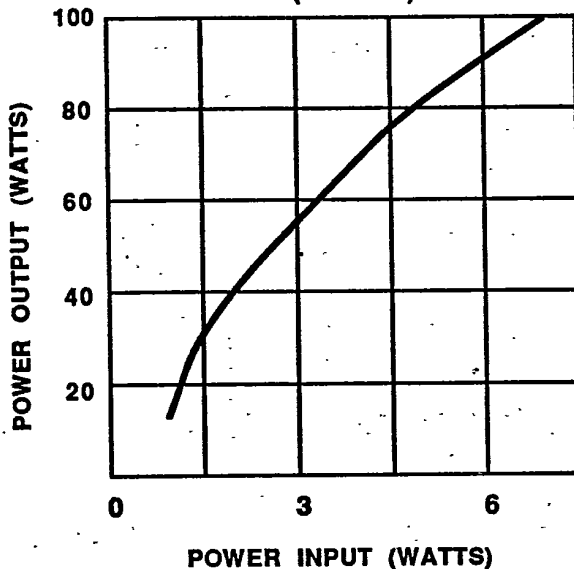

TYPICAL AMPLIFIER LINE UP

Vcc = 12.5 Volts


Frequency Range = 1.5-30 MHz

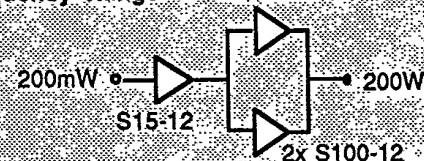


S100-12-2

ELECTRICAL CHARACTERISTICS

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
P _{out}	Power Output	f= 1.5 - 30MHz	100			Watts
P _{in}	Power Input	At Rated Power Out, V _c =12.5V			8.5	Watts
P _g	Power Gain		10.7			dB
V _{Vebo}	Voltage - Emitter to Base	I _e = 10mA	3.5			Volts
V _{Vces}	Voltage - Collector to Base	I _c = 100mA	36			Volts
V _{Vceo}	Voltage - Collector to Emitter	I _c = 100mA	16			Volts
IMD	Intermodulation Distortion Level				-30	dBc
VSWR	Load Mismatch Tolerance				30:1	
η _c	Collector Efficiency	At Rated Power Out		65		%
I _{ces}	Collector to Base Cutoff Current	V _{cb} =15V			50	mA
C _{cb}	Capacitance-Collector to Base	V _{cb} =12.5V, f=1MHz		400		pF
h _{FE}	DC-Current Gain	V _{ce} =5V, I _c =1A	10			
θ _{jc}	Thermal Resistance				0.7	°C/W

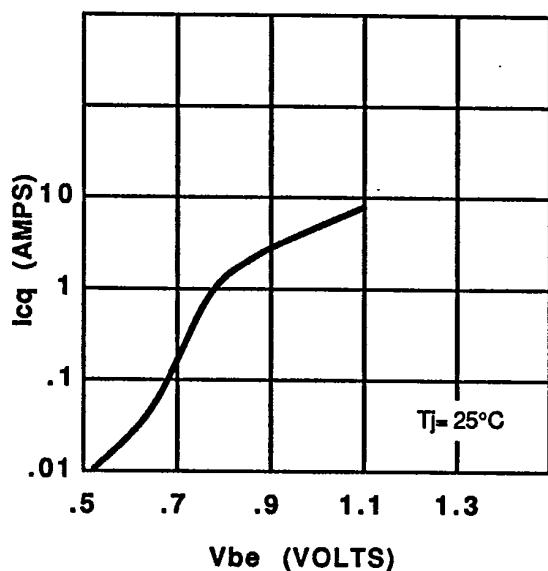I_{cq} VS V_{be} (TYPICAL)



DC SAFE OPERATING AREA (TYPICAL)

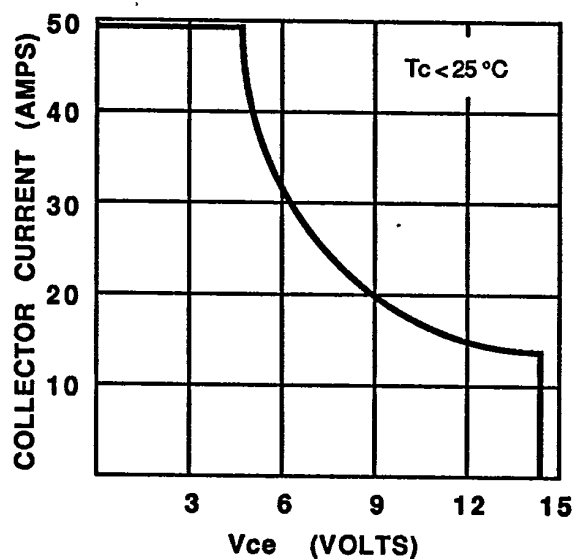

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE

118

S100-12-3

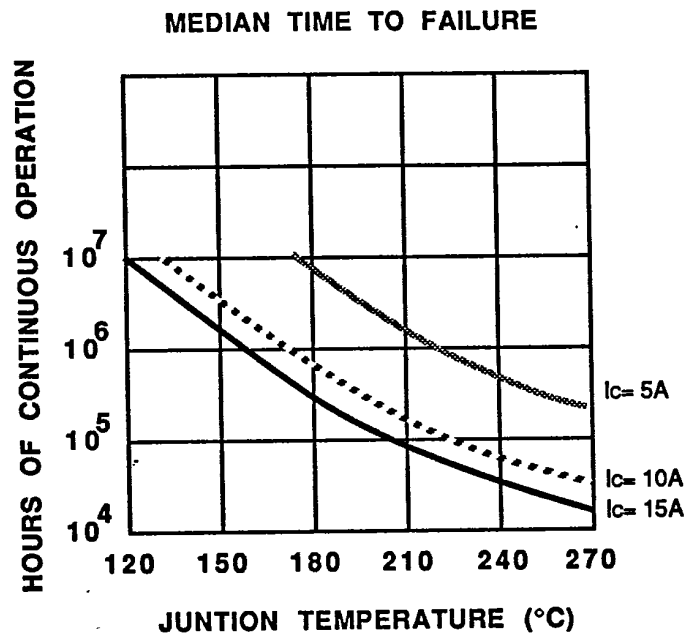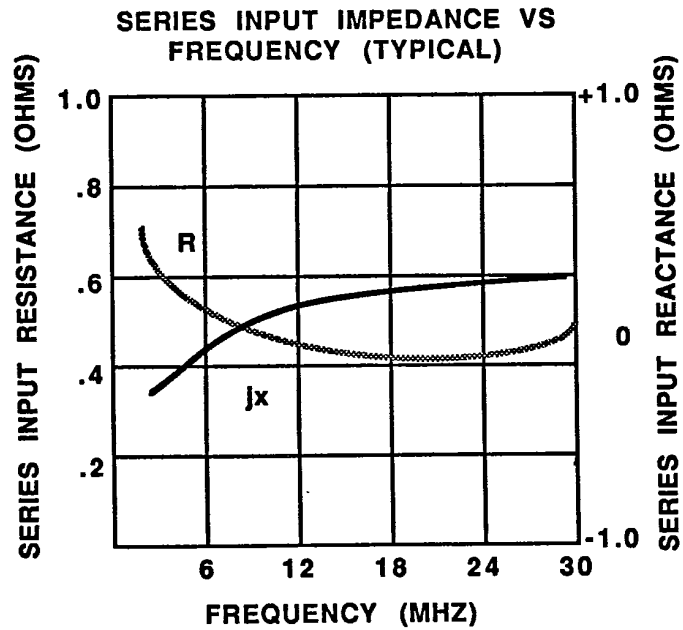

SPECIFICATIONS MAY BE SUBJECT TO CHANGE WITHOUT NOTICE