

HIGH POWER NPN SILICON POWER TRANSISTORS

...designed for use in general-purpose amplifier and switching application .

FEATURES:


- * Recommend for 60 W High Fidelity Audio Frequency Amplifier Output stage
- * Complementary to 2SA1186

NPN
2SC2837


10 AMPERE
POWER
TRANSISTOR
150 VOLTS
100 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	2SC2837	Unit
Collector-Emitter Voltage	V_{CEO}	150	V
Collector-Base Voltage	V_{CBO}	150	V
Emitter-Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	10	A
- Peak	I_{CM}	15	A
Base current	I_B	2.0	A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	100 0.8	W W/ $^\circ\text{C}$
Operating and Storage Junction. Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$



TO-247(3P)

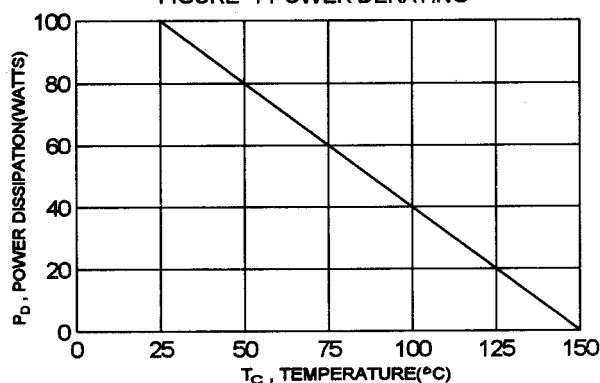


PIN 1.BASE
2.COLLECTOR
3.EMITTER

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.25	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING



DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ($I_c = 25\text{ mA}$, $I_B = 0$)	$V_{(BR)CEO}$	150		V
Collector Cutoff Current ($V_{CB} = 150\text{ V}$, $I_E = 0$)	I_{CBO}		100	μA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)	I_{EBO}		100	μA

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 3.0\text{ A}$, $V_{CE} = 4.0\text{ V}$)	hFE	30		
Collector-Emitter Saturation Voltage ($I_C = 5.0\text{ A}$, $I_B = 500\text{ mA}$)	$V_{CE(sat)}$		2.0	V

DYNAMIC CHARACTERISTICS

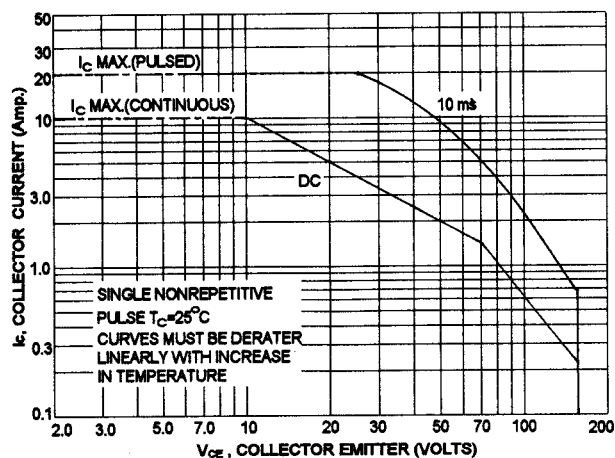
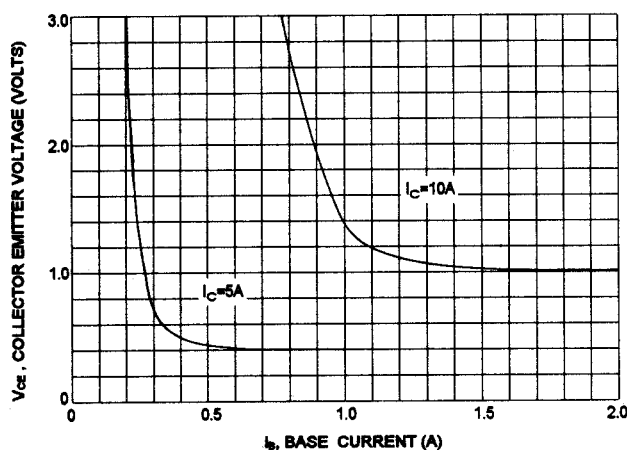
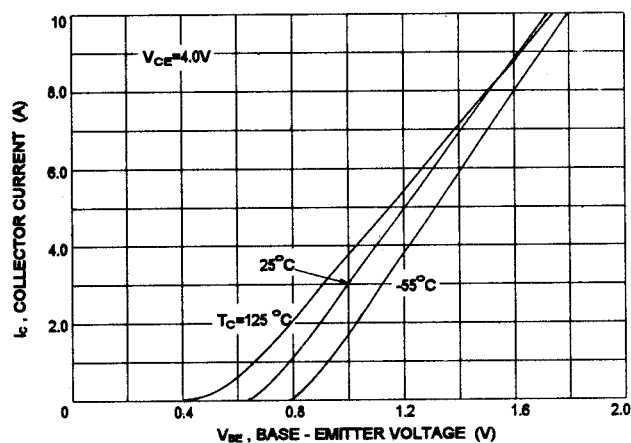
Current-Gain-Bandwidth Product ($I_C = 1.0\text{ A}$, $V_{CE} = 12\text{ V}$, $f = 1.0\text{ MHz}$)	f_T	10		MHz
--	-------	----	--	-----

SWITCHING CHARACTERISTICS

Turn-on Time	$V_{CC} = 60\text{ V}$, $I_C = 5.0\text{ A}$ $I_{B1} = -I_{B2} = 0.5\text{ A}$ $R_L = 12\text{ ohm}$	t_{on}	0.30(typ)		μs
Storage Time		t_s	1.50(typ)		μs
Fall Time		t_f	0.45(typ)		μs

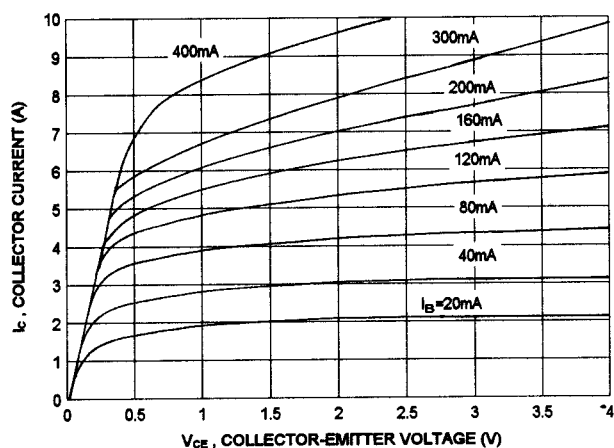
(1) Pulse Test: Pulse Width $\approx 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2.0\%$

ACTIVE REGION SAFE OPERATING AREA (SOA)

 $V_{CE}(\text{sat}) - I_B$  $I_C - V_{BE}$ 

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C-V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{J(PK)}=150^\circ\text{C}$; T_C is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(PK)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

 $I_C - V_{CE}$ 

DC CURRENT GAIN

