

DARLINGTON COMPLEMENTARY SILICON POWER TRANSISTORS

...designed for general-purpose amplifier and low speed switching applications

FEATURES:


- * Collector-Emitter Sustaining Voltage-
 $V_{CE(SUS)}$ = 45 V (Min) - BDX53, BDX54
 = 60 V (Min) - BDX53A, BDX54A
 = 80 V (Min) - BDX53B, BDX54B
 = 100 V (Min) - BDX53C, BDX54C
- * Monolithic Construction with Built-in Base-Emitter Shunt Resistor

NPN	PNP
BDX53	BDX54
BDX53A	BDX54A
BDX53B	BDX54B
BDX53C	BDX54C


8 AMPERE
DARLINGTON
COMPLEMENTARY SILICON
POWER TRANSISTORS
45-100 VOLTS
60 WATTS

MAXIMUM RATINGS

Characteristic	Symbol	BDX53 BDX54	BDX53A BDX54A	BDX53B BDX54B	BDX53C BDX54C	Unit
Collector-Emitter Voltage	V_{CEO}	45	60	80	100	V
Collector-Base Voltage	V_{CBO}	45	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5.0				V
Collector Current - Continuous Peak	I_C	8.0				A
	I_{CM}	12				
Base Current	I_B	0.2				A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	60				W W/ $^\circ\text{C}$
		0.48				
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +150				$^\circ\text{C}$




TO-220

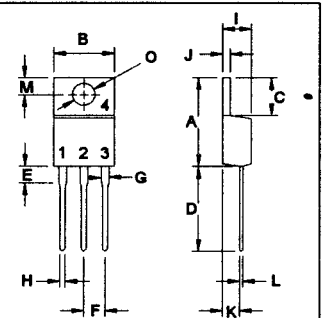

PIN 1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR (CASE)

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	2.08	$^\circ\text{C/W}$

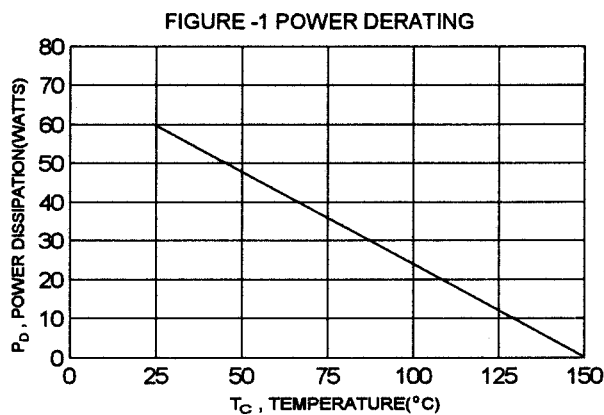

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

BDX53,A,B,C NPN / BDX54,A,B,C PNP

ELECTRICAL CHARACTERISTICS (T_c = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage(1) (I _c = 100 mA, I _B = 0)	BDX53, BDX54 BDX53A, BDX54A BDX53B, BDX54B BDX53C, BDX54C	V _{CEO(sus)}	45 60 80 100	V
Collector Cutoff Current (V _{CE} = 22 V, I _B = 0) (V _{CE} = 30 V, I _B = 0) (V _{CE} = 40 V, I _B = 0) (V _{CE} = 50 V, I _B = 0)	BDX53, BDX54 BDX53A, BDX54A BDX53B, BDX54B BDX53C, BDX54C	I _{CEO}		0.5 0.5 0.5 0.5 mA
Collector-Base Cutoff Current (V _{CB} = Rated V _{CB} , I _E = 0)		I _{CBO}		200 μA
Emitter-Base Cutoff Current (V _{EB} = 5.0 V, I _C = 0)		I _{EBO}		2.0 mA


ON CHARACTERISTICS (1)

DC Current Gain (I _C = 3.0 A, V _{CE} = 3.0 V)		hFE	750	
Collector-Emitter Saturation Voltage (I _C = 3.0 A, I _B = 12 mA)		V _{CE(sat)}	2.0	V
Base-Emitter Saturation Voltage (I _C = 3.0 A, I _B = 12 mA)		V _{BE(sat)}	2.5	V
Diode Forward-Voltage (I _F = 3.0 A)		V _F	2.5	V


(1) Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

INTERNAL SCHEMATIC DIAGRAM

BDX53 Series NPN




BDX54 Series PNP




NPN BDX53,A,B,C


COLLECTOR SATURATION REGION

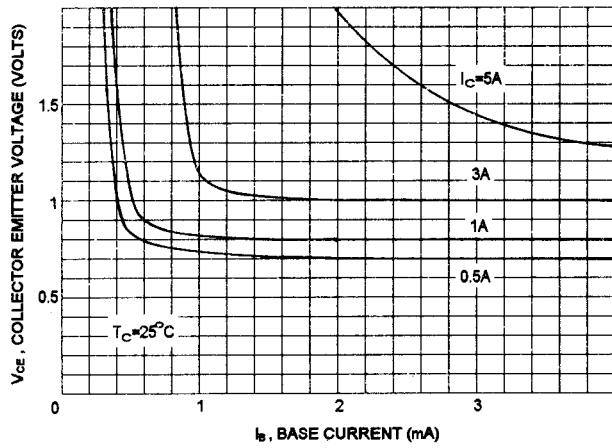

SWITCHING TIME

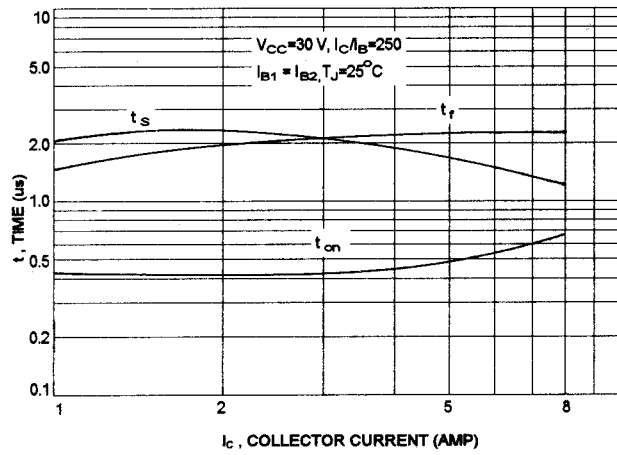


SAFE OPERATING AREA

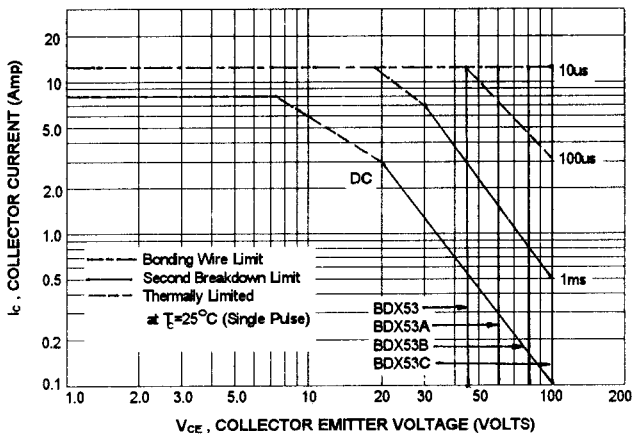


PNP BDX54,A,B,C


COLLECTOR SATURATION REGION

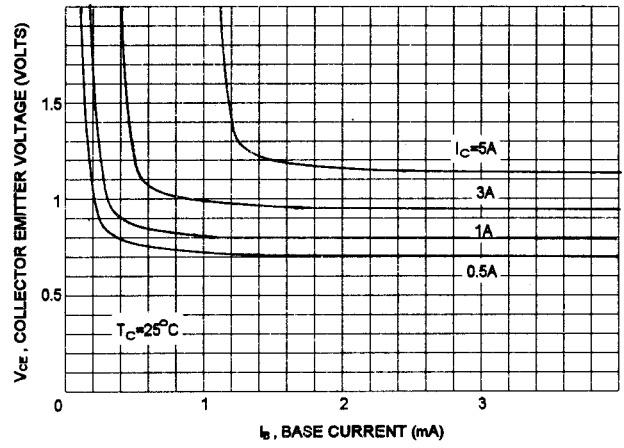


SWITCHING TIME

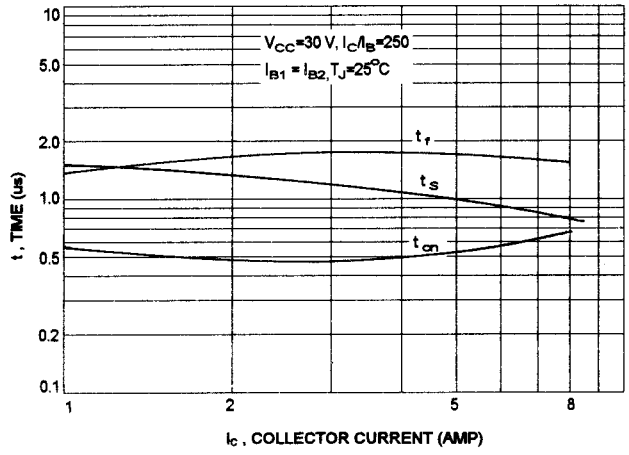


SAFE OPERATING AREA

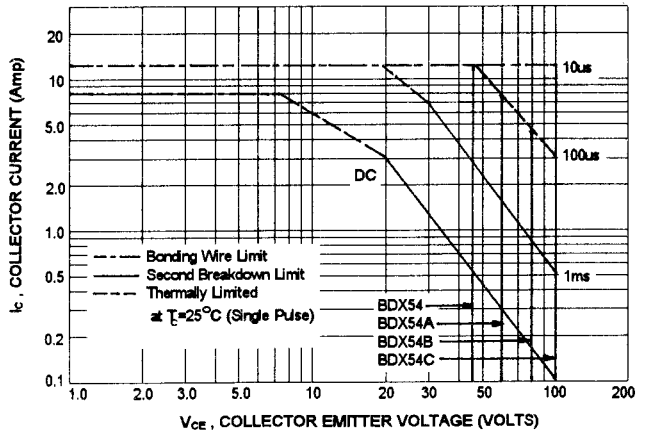


DC CURRENT GAIN

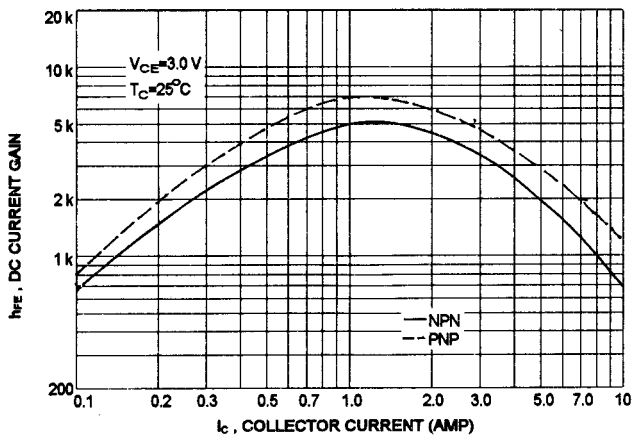


$I_C - V_{BE}$

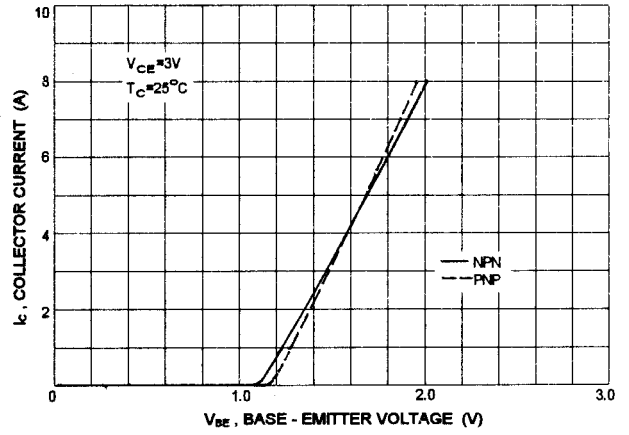


SMALL SIGNAL CURRENT GAIN

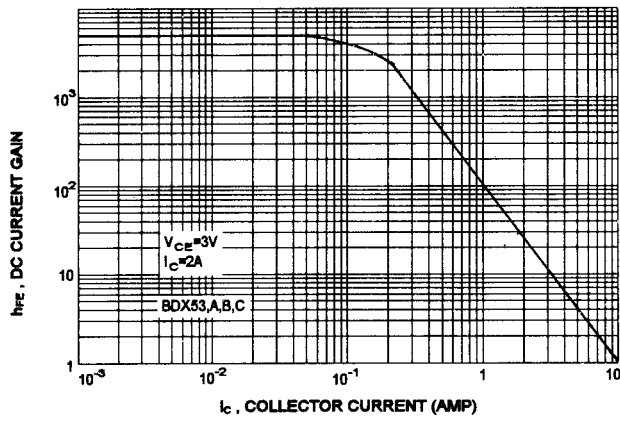

SMALL SIGNAL CURRENT GAIN

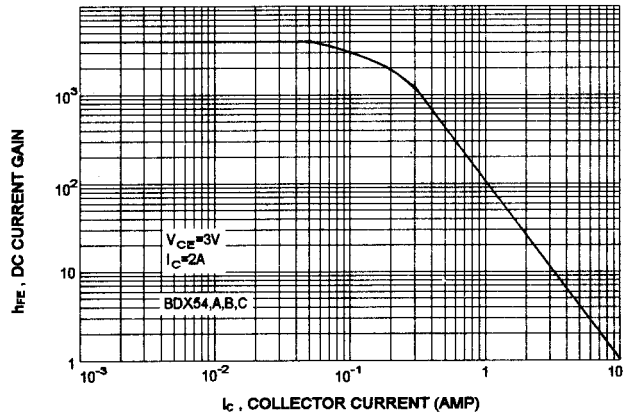

$V_{CE(sat)} - I_C$

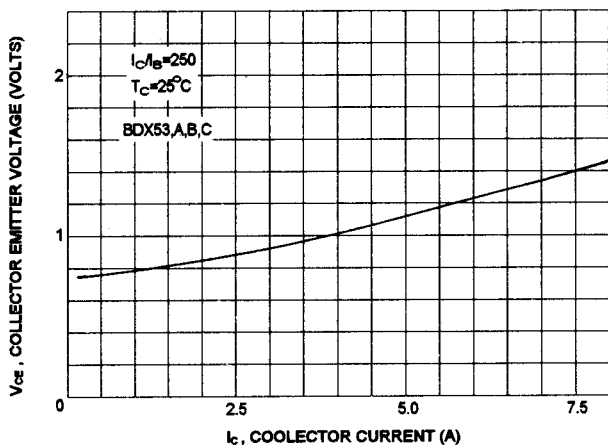

$V_{CE(sat)} - I_C$

