


**DESCRIPTION** The 2SA1175 is designed for use in driver stage of AF amplifier.

- FEATURES**
- High  $h_{FE}$  and excellent linearity : 200 TYP.  
 $h_{FE}$  ( $I_C = -1.0$  mA)
  - Complementary to the NEC 2SC2785 NPN transistor.

### ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures	
Storage Temperature	-55 to +150 °C
Junction Temperature	+150 °C Maximum
Maximum Power Dissipation ( $T_a = 25$ °C)	
Total Power Dissipation	250 mW
Maximum Voltages and Currents ( $T_a = 25$ °C)	
$V_{CBO}$ Collector to Base Voltage	-60 V
$V_{CEO}$ Collector to Emitter Voltage	-50 V
$V_{EBO}$ Emitter to Base Voltage	-5.0 V
$I_C$ Collector Current	-100 mA
$I_B$ Base Current	-20 mA

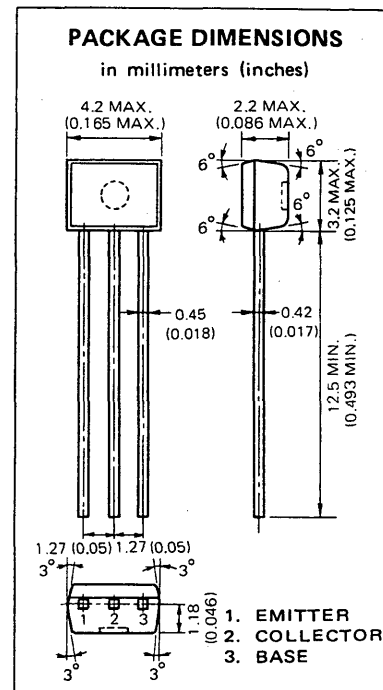

### ELECTRICAL CHARACTERISTICS ( $T_a = 25$ °C)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
$h_{FE}$	DC Current Gain	110	200	600	-	$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
NF	Noise Figure		6.0	20	dB	$V_{CE} = -6.0$ V, $I_C = -0.3$ mA, $R_G = 10$ k $\Omega$ , $f = 100$ Hz
$f_T$	Gain Bandwidth Product	50	180		MHz	$V_{CE} = -6.0$ V, $I_E = -1.0$ mA
$C_{ob}$	Output Capacitance		4.5	6.0	pF	$V_{CB} = -10$ V, $I_E = 0$ , $f = 1.0$ MHz
$I_{CBO}$	Collector Cutoff Current			-0.1	$\mu$ A	$V_{CB} = -60$ V, $I_E = 0$
$I_{EBO}$	Emitter Cutoff Current			-0.1	$\mu$ A	$V_{EB} = -5.0$ V, $I_C = 0$
$V_{BE}$	Base to Emitter Voltage	-0.58	-0.62	-0.68	V	$V_{CE} = -6.0$ V, $I_C = -1.0$ mA
$V_{CE(sat)}$	Collector Saturation Voltage		-0.18	-0.3	V	$I_C = -100$ mA, $I_B = -10$ mA


### Classification of $h_{FE}$

Rank	RF	JF	HF	FF	EF	KF
Range	110 - 180	135 - 220	170 - 270	200 - 320	250 - 400	300 - 600


$h_{FE}$  Test Conditions:  $V_{CE} = -6.0$  V,  $I_C = -1.0$  mA

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$  unless otherwise noted)


TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

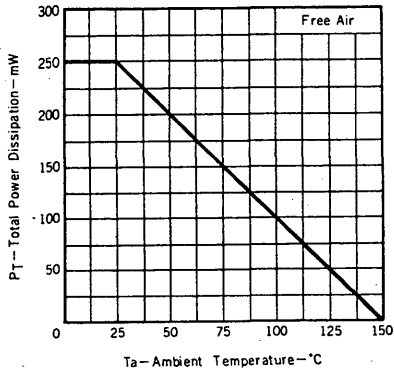


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

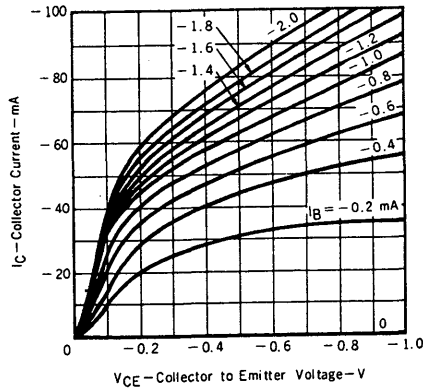


COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE

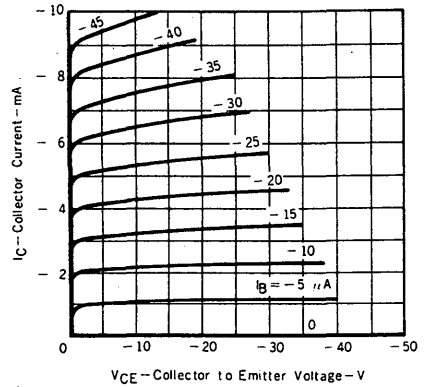


DC CURRENT GAIN vs. COLLECTOR CURRENT

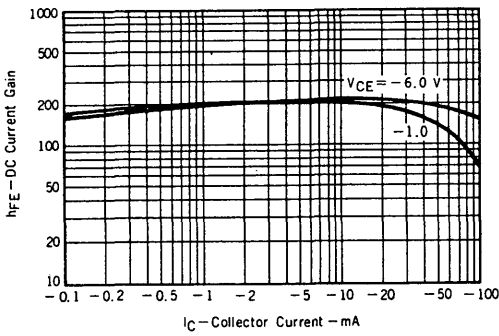


DC CURRENT GAIN vs. COLLECTOR CURRENT

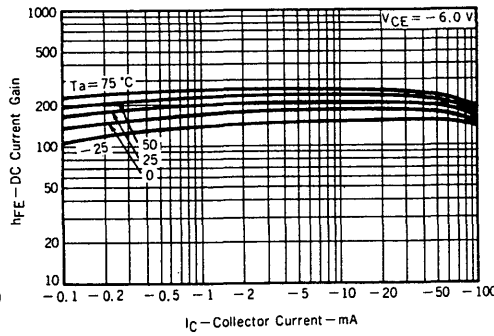


COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE

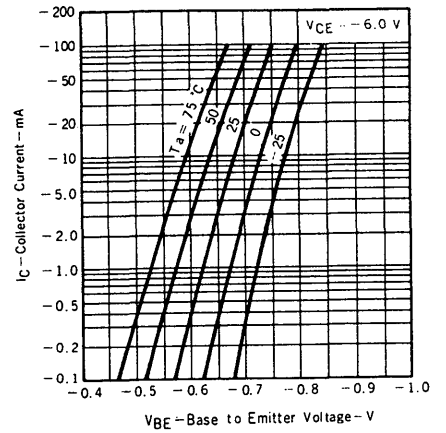


COLLECTOR AND BASE SATURATION VOLTAGE vs. COLLECTOR CURRENT

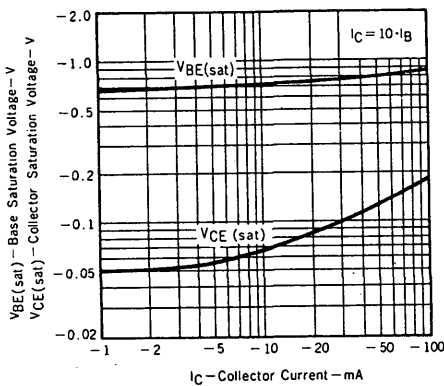


GAIN BANDWIDTH PRODUCT vs. EMITTER CURRENT

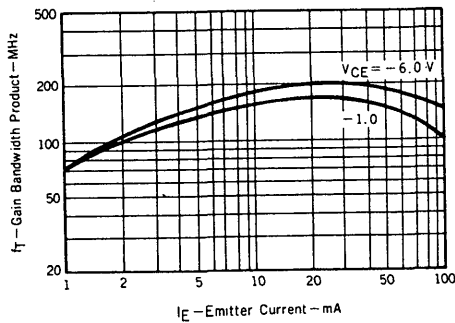


OUTPUT CAPACITANCE vs. REVERSE VOLTAGE

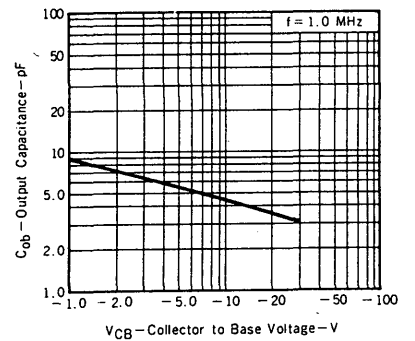


NORMALIZED h-PARAMETERS vs. EMITTER CURRENT

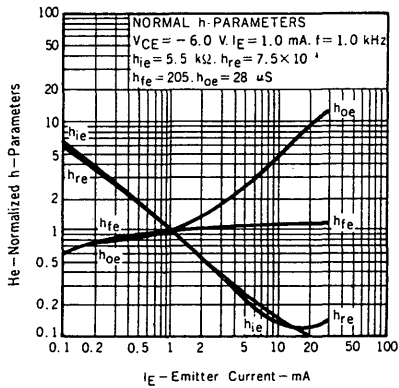


NORMALIZED h-PARAMETERS vs. COLLECTOR TO EMITTER VOLTAGE

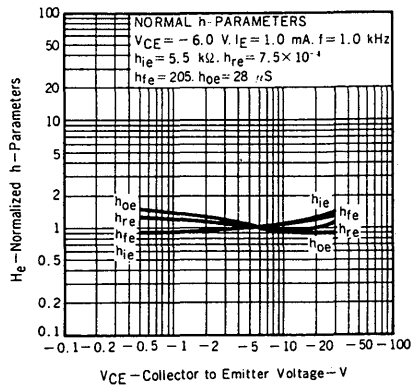


NOISE FIGURE MAP 1

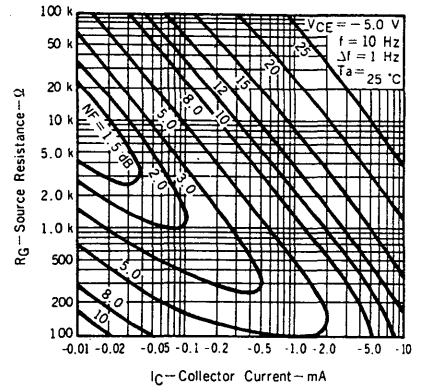

NOISE FIGURE MAP 2

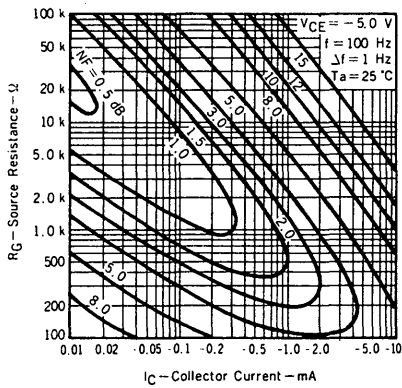

NOISE FIGURE MAP 3

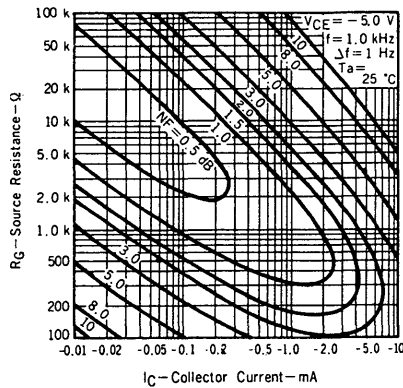

NOISE FIGURE MAP 4

