


DESCRIPTION The 2SA954 is designed for use in driver stage of high voltage audio equipment.

- FEATURES**
- High total power dissipation.
 $P_T = 600 \text{ mW}$
 - High h_{FE} and high voltage.
 $h_{FE} (I_C = -50 \text{ mA}) : 200 \text{ TYP.}$
 $V_{CEO} : -80 \text{ V}$

ABSOLUTE MAXIMUM RATINGS

- Maximum Temperatures
- Storage Temperature $-55 \text{ to } +150 \text{ }^\circ\text{C}$
 - Junction Temperature $+150 \text{ }^\circ\text{C}$ Maximum
- Maximum Power Dissipation ($T_a = 25 \text{ }^\circ\text{C}$)
- Total Power Dissipation 600 mW
- Maximum Voltages and Currents ($T_a = 25 \text{ }^\circ\text{C}$)
- V_{CBO} Collector to Base Voltage -80 V
 - V_{CEO} Collector to Emitter Voltage -80 V
 - V_{EBO} Emitter to Base Voltage -5.0 V
 - I_C Collector Current -300 mA
 - I_B Base Current -60 mA

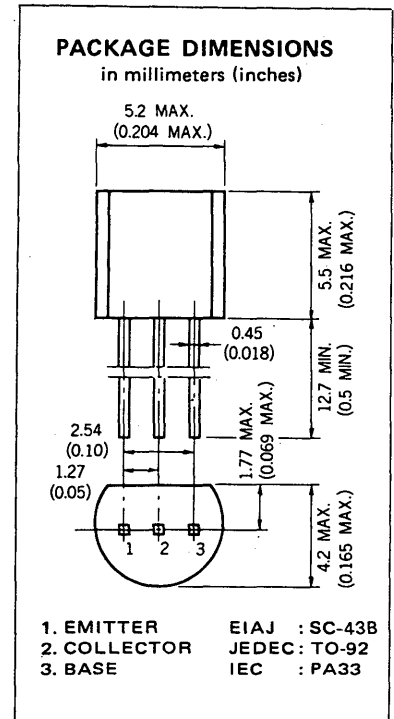

ELECTRICAL CHARACTERISTICS ($T_a = 25 \text{ }^\circ\text{C}$)

| SYMBOL | CHARACTERISTIC | MIN. | TYP. | MAX. | UNIT | TEST CONDITIONS |
|-----------------|-------------------------------|------|-------|------|------|---|
| h_{FE1}^* | DC Current Gain | 90 | 200 | 400 | — | $V_{CE} = -1.0 \text{ V}, I_C = -50 \text{ mA}$ |
| h_{FE2}^* | DC Current Gain | 30 | 80 | | — | $V_{CE} = -1.0 \text{ V}, I_C = -300 \text{ mA}$ |
| C_{ob} | Collector to Base Capacitance | | 13 | 25 | pF | $V_{CB} = -6.0 \text{ V}, I_E = 0$ $f = 1.0 \text{ MHz}$ |
| f_T | Gain Bandwidth Product | 50 | 100 | | MHz | $V_{CE} = -6.0 \text{ V}, I_E = 10 \text{ mA}$ |
| V_{BE}^* | Base to Emitter Voltage | -600 | -660 | -700 | mV | $V_{CE} = -6.0 \text{ V}, I_C = -10 \text{ mA}$ |
| $V_{CE(sat)}^*$ | Collector Saturation Voltage | | -0.15 | -0.6 | V | $I_C = -300 \text{ mA}, I_B = -30 \text{ mA}$ |
| $V_{BE(sat)}^*$ | Base Saturation Voltage | | -0.85 | -1.2 | V | $I_C = -300 \text{ mA}, I_B = -30 \text{ mA}$ |
| I_{CBO} | Collector Cutoff Current | | | -100 | nA | $V_{CB} = -80 \text{ V}, I_E = 0$ |
| I_{EBO} | Emitter Cutoff Current | | | -100 | nA | $V_{EB} = -5.0 \text{ V}, I_C = 0$ |

* Pulsed PW $\leq 350 \mu\text{s}$, duty cycle $\leq 2.0 \%$

Classification of h_{FE1}

| Rank | M | L | K |
|-------|----------|-----------|-----------|
| Range | 90 - 180 | 135 - 270 | 200 - 400 |

h_{FE} Test Conditions : $V_{CE} = -1.0 \text{ V}, I_C = -50 \text{ mA}$

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$ unless otherwise noted)

