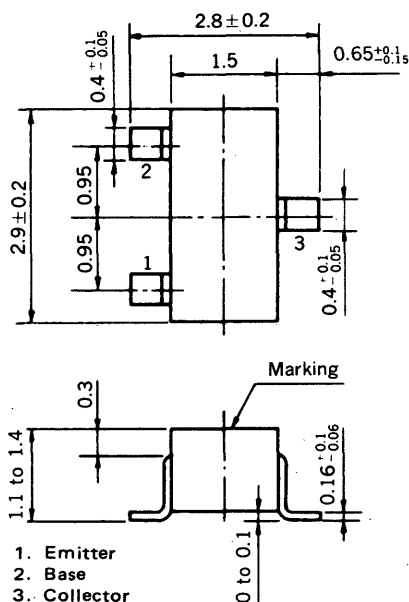



**MEDIUM SPEED SWITCHING
RESISTOR BUILT-IN TYPE PNP TRANSISTOR
MINI MOLD**

PACKAGE DIMENSIONS

in millimeters

**FEATURES**

- Resistor Built-in TYPE



$$R_1 = 4.7 \text{ k}\Omega$$

- Complementary to FA1L3Z

ABSOLUTE MAXIMUM RATINGSMaximum Voltages and Currents ($T_a = 25^\circ\text{C}$)

Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current (DC)	I_C	-100	mA
Collector Current (Pulse)	I_C	-200	mA

Maximum Power Dissipation

Total Power Dissipation

at 25°C Ambient Temperature

P_T	200	mW
-------	-----	----

Maximum Temperatures

Junction Temperature

T_j	150	$^\circ\text{C}$
-------	-----	------------------

Storage Temperature Range

T_{stg}	-55 to +150	$^\circ\text{C}$
-----------	-------------	------------------

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			-100	nA	$V_{CB} = -50 \text{ V}, I_E = 0$
DC Current Gain	h_{FE1}^*	135	260	600		$V_{CE} = -5.0 \text{ V}, I_C = -5.0 \text{ mA}$
DC Current Gain	h_{FE2}^*	100	200			$V_{CE} = -5.0 \text{ V}, I_C = -50 \text{ mA}$
Collector Saturation Voltage	$V_{CE(sat)}^*$		-0.04	-0.2	V	$I_C = -5.0 \text{ mA}, I_B = -0.25 \text{ mA}$
Low-Level Input Voltage	V_{IL}^*		-0.57	-0.5	V	$V_{CE} = -5.0 \text{ V}, I_C = -100 \mu\text{A}$
High-Level Input Voltage	V_{IH}^*	-1.2	-0.75		V	$V_{CE} = -0.2 \text{ V}, I_C = -5.0 \text{ mA}$
Input Resistor	R_1	3.29	4.70	6.11	k Ω	
Turn-on Time	t_{on}		0.04	0.2	μs	$V_{CC} = -5 \text{ V}, V_{in} = -5 \text{ V}$ $R_L = 1 \text{ k}\Omega$ $PW = 2 \mu\text{s}, \text{Duty Cycle} \leq 2\%$
Storage Time	t_{stg}		1.7	5.0	μs	
Turn-off Time	t_{off}		1.9	6.0	μs	

* Pulsed: $PW \leq 350 \mu\text{s}$, Duty Cycle $\leq 2\%$ **h_{FE} Classification**

Marking	M36	M37	M38
h_{FE1}	135 to 270	200 to 400	300 to 600

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

