

User's Manual

SM850

System Simulator Ver. 2.00 or Later

External Part User Open Interface Specifications

Target Device
V850 Series™

[MEMO]

V850 Series, V852, V853, V850/SA1, V850/SB1, V850/SB2, V850/SC1, V850/SC2, V850/SC3, V850/SF1, V850/SV1, V850E/MS1, V850E/MS2, V850E/MA1, V850E/MA2, V850E/IA1, and V850E/IA2 are trademarks of NEC Corporation.

Pentium is a trademark of Intel Corporation.

Windows and WindowsNT are either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries.

PC/AT is a trademark of International Business Machines Corporation.

The export of these products from Japan is regulated by the Japanese government. The export of some or all of these products may be prohibited without governmental license. To export or re-export some or all of these products from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

• **The information in this document is current as of October, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**

• No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.

• NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.

• Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.

• While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.

• NEC semiconductor products are classified into the following three quality grades:

"Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

(1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.

(2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4

Regional Information

Some information contained in this document may vary from country to country. Before using any NEC product in your application, please contact the NEC office in your country to obtain a list of authorized representatives and distributors. They will verify:

- Device availability
- Ordering information
- Product release schedule
- Availability of related technical literature
- Development environment specifications (for example, specifications for third-party tools and components, host computers, power plugs, AC supply voltages, and so forth)
- Network requirements

In addition, trademarks, registered trademarks, export restrictions, and other legal issues may also vary from country to country.

NEC Electronics Inc. (U.S.)

Santa Clara, California
Tel: 408-588-6000
800-366-9782
Fax: 408-588-6130
800-729-9288

NEC do Brasil S.A.

Electron Devices Division
Guarulhos-SP, Brasil
Tel: 11-6462-6810
Fax: 11-6462-6829

NEC Electronics (Europe) GmbH

Duesseldorf, Germany
Tel: 0211-65 03 01
Fax: 0211-65 03 327

• Sucursal en España

Madrid, Spain
Tel: 091-504 27 87
Fax: 091-504 28 60

• Succursale Française

Vélizy-Villacoublay, France
Tel: 01-30-67 58 00
Fax: 01-30-67 58 99

• Filiale Italiana

Milano, Italy
Tel: 02-66 75 41
Fax: 02-66 75 42 99

• Branch The Netherlands

Eindhoven, The Netherlands
Tel: 040-244 58 45
Fax: 040-244 45 80

• Branch Sweden

Taeby, Sweden
Tel: 08-63 80 820
Fax: 08-63 80 388

• United Kingdom Branch

Milton Keynes, UK
Tel: 01908-691-133
Fax: 01908-670-290

NEC Electronics Hong Kong Ltd.

Hong Kong
Tel: 2886-9318
Fax: 2886-9022/9044

NEC Electronics Hong Kong Ltd.

Seoul Branch
Seoul, Korea
Tel: 02-528-0303
Fax: 02-528-4411

NEC Electronics Shanghai, Ltd.

Shanghai, P.R. China
Tel: 021-6841-1138
Fax: 021-6841-1137

NEC Electronics Taiwan Ltd.

Taipei, Taiwan
Tel: 02-2719-2377
Fax: 02-2719-5951

NEC Electronics Singapore Pte. Ltd.

Novena Square, Singapore
Tel: 253-8311
Fax: 250-3583

[MEMO]

INTRODUCTION

Target Readers	The contents described in this manual use the Windows™ 98/WindowsMe/Windows NT™ 4.0/Windows2000/WindowsXP 32-bit application program format and this manual is therefore intended for users who have experience creating Windows 98/WindowsMe/Windows NT 4.0/Windows2000/WindowsXP 32-bit application programs.	
Purpose	The purpose of this manual is to describe the interface specifications so to enable users to create custom settings for standard external parts that cannot otherwise be used for the SM850 System Simulator. The functions, programming rules, and programming steps that users need to create programs for customized parts are described in this manual.	
Organization	This manual is broadly divided into the following sections. • General • Download • Programming • Function reference • Operations during CPU reset • Programming examples • Error messages	
How to Use This Manual	It is assumed that readers of this manual have general knowledge of microcomputers and the C programming language. Readers will need to have a basic knowledge of how to create Windows 98/WindowsMe/Windows NT 4.0/Windows2000/WindowsXP 32-bit application programs. For information on functions the user can use to create programs for customized parts: → See CHAPTER 4 FUNCTION REFERENCE. For information on the meanings and causes of messages: → See APPENDIX A ERROR MESSAGES.	
Conventions	Data significance:	Higher digits on the left and lower digits on the right
	Note:	Footnote for item marked with Note in the text
	Caution:	Information requiring particular attention
	Remark:	Supplementary information
	Numerical representation:	Binary ... XXXX or XXXXB
		Decimal ... XXXX
		Hexadecimal ... 0XXXXX
	Prefix indicating the power of 2 (address space, memory capacity):	
	K (Kilo): $2^{10} = 1024$	
	M (Mega): $2^{20} = 1024^2$	

Related Documents

Refer to the documents listed below when using this manual.

The related documents indicated in this publication may include preliminary versions.
However, preliminary versions are not marked as such.

Documents related to development tools (User's Manuals)

Document Name		Document No.
IE-703002-MC (In-circuit emulator for V853 TM , V850/SA1 TM , V850/SB1 TM , V850/SB2 TM , V850/SC1 TM , V850/SC2 TM , V850/SC3 TM , V850/SF1 TM , V850/SV1 TM)		U11595E
IE-V850E-MC (In-circuit emulator for V850E/IA1 TM , V850E/IA2 TM), IE-V850E-MC-A (In-circuit emulator for V850E/MA1 TM , V850E/MA2 TM)		U14487E
IE-703003-MC-EM1 (In-circuit emulator option board for V853)		U11596E
IE-703017-MC-EM1 (In-circuit emulator option board for V850/SA1)		U12898E
IE-703037-MC-EM1 (In-circuit emulator option board for V850/SB1, V850/SB2)		U14151E
IE-703040-MC-EM1 (In-circuit emulator option board for V850/SV1)		U14337E
IE-703079-MC-EM1 (In-circuit emulator option board for V850/SF1)		U15447E
IE-703102-MC (In-circuit emulator for V850E/MS1 TM , V850E/MS2 TM)		U13875E
IE-703102-MC-EM1, IE-703102-MC-EM1-A (In-circuit emulator option board for V850E/MS1, V850E/MS2)		U13876E
IE-703107-MC-EM1 (In-circuit emulator option board for V850E/MA1)		U14481E
IE-703116-MC-EM1 (In-circuit emulator option board for V850E/IA1)		U14700E
CA850 Ver. 2.50 C Compiler Package	Operation	U16053E
	C Language	U16054E
	PM plus	U16055E
	Assembly Language	U16042E
ID850 Ver. 2.40 Integrated Debugger	Operation, Windows Based	U15181E
SM850 Ver. 2.40 System Simulator	Operation, Windows Based	U15182E
SM850 Ver. 2.00 or Later System Simulator	External Part User Open Interface Specifications	This manual
RX850 Ver. 3.13 or Later Real-Time OS	Basics	U13430E
	Installation	U13410E
	Technical	U13431E
RX850 Pro Ver. 3.13 Real-Time OS	Fundamental	U13773E
	Installation	U13774E
	Technical	U13772E
RD850 Ver. 3.01 Task Debugger		U13737E
RD850 Pro Ver. 3.01 Task Debugger		U13916E
AZ850 Ver. 3.10 System Performance Analyzer		U14410E
PG-FP3 Flash Memory Programmer		U13502E
PG-FP4 Flash Memory Programmer		U15260E

CONTENTS

CHAPTER 1 GENERAL	13
1.1 General Description of External Part User Open Interface Specifications	13
1.2 General Description of User Custom Parts	13
1.2.1 Types of customization	13
1.2.2 User-created files	13
1.2.3 Positioning of user-customized parts	14
1.3 Environment	15
1.3.1 Development environment	15
1.3.2 Operating environment	15
 CHAPTER 2 DOWNLOAD	 16
2.1 Download	17
2.2 Unload	17
 CHAPTER 3 PROGRAMMING	 18
3.1 Programming Configuration and Processing Flow	18
3.1.1 Customization via Parts window	18
3.1.2 Customization via user window	19
3.2 Steps in Creation of Customized Parts	21
3.2.1 Customization via Parts window	21
3.2.2 Customization via user window	21
3.3 Basic Rules	23
3.3.1 User functions	23
3.3.2 External variables	23
3.3.3 Function names	23
3.3.4 Active high/low	23
3.3.5 Pin names	24
3.3.6 Include file, Source file	24
3.4 Module Definition (DEF) File	25
3.4.1 EXPORTS declaration	25
 CHAPTER 4 FUNCTION REFERENCE	 26
4.1 Customization via Parts window	26
4.2 Customization via User Window	48
 CHAPTER 5 OPERATIONS DURING CPU RESET	 76
5.1 Parts Customized via Parts Window	76
5.2 Parts Customized via User Window	76
 CHAPTER 6 PROGRAMMING EXAMPLES	 77
6.1 Example of Parts Customized via Parts Window	78

6.1.1	Description of samples	78
6.1.2	Source examples.....	79
<1>	Target program (program for V852)	79
<2>	Custom part source file UPsw00.c	80
<3>	Definition file UPsw00.def	83
<4>	Make file UPsw00.mak.....	84
6.2	Example of Parts Customized via User Window.....	89
6.2.1	Description of samples	89
6.2.2	Source examples.....	90
<1>	Target program (program for V853)	90
<2>	Custom part source file UOadda00.c	91
<3>	Definition file UOadda00.def	99
<4>	Make file UOadda00.mak.....	100
APPENDIX A ERROR MESSAGES		104
A.1	Error Processing	104
A.2	Error and Warning Messages	104
A.2.1	Error Messages.....	105
A.2.2	Warning Messages	107

LIST OF FIGURES

Figure No.	Title	Page
1-1	Configuration Diagram of V850 Simulator	14
2-1	SM850 Simulator Parts Window.....	16
2-2	Open Dialog Box	17
3-1	Programming Configuration and Processing Flow for Customization via Parts Window	18
3-2	Programming Configuration and Processing Flow for Customization via User Window	20
3-3	Creation Flow	22
4-1	Push-Buttons	27
4-2	Toggle Buttons	28
4-3	Group Select Buttons	30
4-4	Bitmap Images for Inactive LED (Left) and Active LED (Right).....	33
4-5	Pictures for Inactive LED (Left) and Active LED (Right).....	33
4-6	LED Function Set Per Port	34
4-7	Matrix LED Function	35
4-8	Active LED (Left) and Inactive LED (Right)	36
4-9	Stepping Motor	37
4-10	Vertical Scroll Bar Analog Input.....	38
6-1	Example of Parts Customized via Parts Window	78
6-2	Example of Parts Customized via User Window	89

LIST OF TABLES

Table No.	Title	Page
4-1	Customization Functions Used in Parts Window	26
4-2	Customization Functions Used in User Window	48
5-1	Parts Customized via Parts Window During CPU Reset	76
A-1	The Function Names For Which The Error Occurred	104

CHAPTER 1 GENERAL

1.1 General Description of External Part User Open Interface Specifications

In addition to simulating the operations of the actual target system, the SM850 can simulate the operations of a dummy target system.

Standard external parts are provided with the SM850 for building a dummy target system. Setup dialog boxes are also provided for each external part to enable easier implementation of standard external parts.

In addition, parts that cannot be set up using a setup dialog box for standard external parts still can be implemented via user programming as user-specified external parts.

The external part user open interface specifications include the function specifications for the SM850's interface, which the user needs to create programs for customized parts.

1.2 General Description of User Custom Parts

1.2.1 Types of customization

Parts can be customized by the user's programming in the following two ways.

(1) Customization via Parts window

Parts can be customized using the customization function that facilitates the creation of parts by simply giving the relevant pins and action information as parameters.

Based on information that is called within a user's function, the corresponding part is pasted into the Parts window and all of the related simulation processing is executed.

(2) Customization via user window

Users can customize parts with functions that can be used to create parts and windows.

The handle notification function for a user window can be used to enable processing of windows and input from user parts, and the simulation call function can be used to perform output display processing to user parts.


1.2.2 User-created files

User-customized parts are implemented by user-created programs based on the specifications described in this manual. These user-created programs end up as DLL files.

The DLL files for user-customized parts are loaded into the external parts GUI block before simulation processing is executed.

1.2.3 Positioning of user-customized parts

Figure 1-1. Configuration Diagram of V850 Simulator

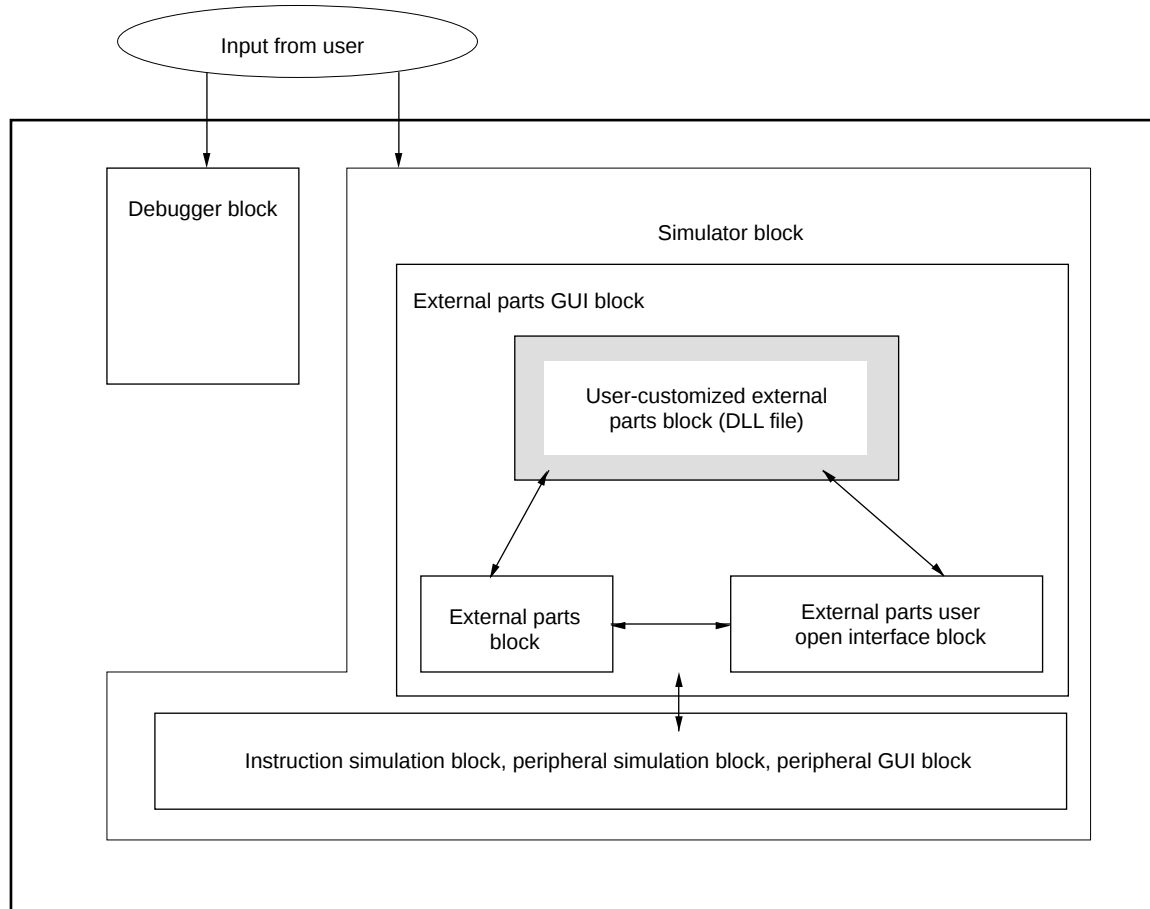

Debugger block	Any directive from the user that causes any function to be executed by the simulator is called a command. The debugger block provides an environment in which the user can enter such commands via the keyboard or the mouse.
Peripheral GUI block	This block provides a setup environment that enables the user to easily set the desired input information to a port via a window.
DLL	DLL stands for "Dynamic Link Library." DLLs are Windows modules that contain executable code and data that can be accessed by functions within Windows applications or other DLLs.
External parts GUI block	This block enables external part operations to be performed via a window.
External parts block	This is part of the external parts GUI block, which is used to control standard external parts.
User-customized external parts block	This is part of the external parts GUI block, which is used for user-created external parts.
External parts user open interface block	This is part of the external parts GUI block, which is used as an interface between the external parts block and the user-customized external parts block.

1.3 Environment

1.3.1 Development environment

The following describes the development environment under which users write programs according to this manual's specifications in order to create DLL files.

Hardware environment: IBM PC/AT™ compatible
(CPU: Pentium™ 166 MHz or above is recommended)
Software environment: Windows 98/Windows NT 4.0/Window 2000/Windows Me/Windows XP
Microsoft Visual C++ V5.00 or later

1.3.2 Operating environment

The operating environment of the simulator that loads and operates user-created files is described below.

Hardware environment: IBM PC/AT compatible
(CPU: Pentium 166 MHz or above is recommended)
Software environment: Windows 98/Windows NT 4.0/Window 2000/Windows Me/Windows XP


CHAPTER 2 DOWNLOAD

This chapter describes the steps for downloading to the simulator user-customized parts that have been created as described in Chapters 3 and 4.

Before user-customized external parts (DLL files) can be actually used, they must be loaded into the simulator. To remove loaded user-customized external parts (DLL files), unload them from the simulator.

Use the Parts window to load and unload user-customized external parts (DLL files).

Figure 2-1. SM850 Simulator Parts Window

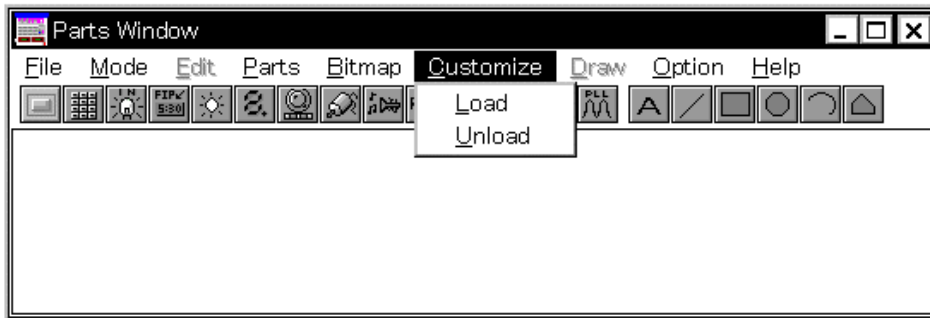


2.1 Download

Operation steps

- (1) In the Parts window, select [Customize] menu→ [Load] from the menu bar to open the Open dialog box.

Figure 2-2. Open Dialog Box

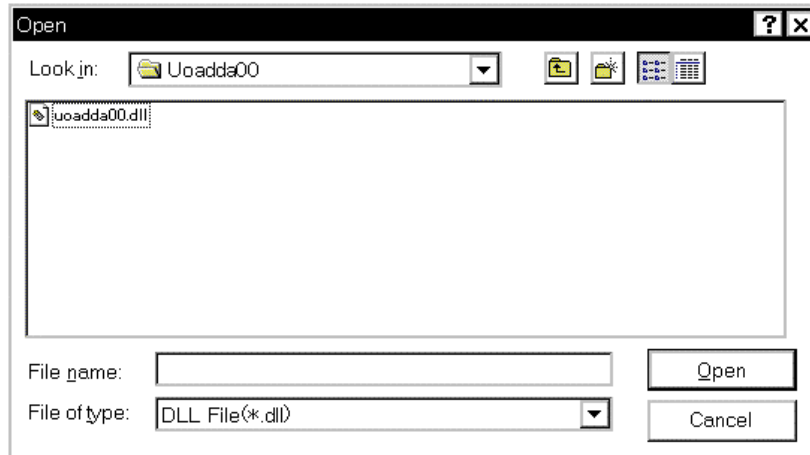

- (2) In the Open dialog box, select a customized external part DLL file, then click the <Open> button. The specified DLL file is then loaded into the simulator. Once this has been done, the part created by the customization function in the Parts window is pasted in the Parts window. If the part was customized via a user window, it is displayed in a user window.
 - (a) Up to six user-customized external part DLLs can be loaded into the simulator.
 - (b) A user-customized external part DLL file that is downloaded to the simulator remains valid even after the Parts window is closed. The next time the Parts window is opened, the same DLL file will be automatically downloaded.
 - (c) The name of the loaded user-customized external part DLL file is added to the pull-down menu under [Customize] menu of the Parts window.
 - (d) The user-customized external part that is displayed in the Parts window can be relocated. However, the information about the relocation cannot be saved. After relocation, if you have performed either the following sets of operations, the location of each part is neither saved nor completed. Therefore, be sure to locate each part again.
 - If the status is saved to a project file (xxxx.prj) or to a file to which display information for the Parts window is to be saved (xxxx.pnl), and then these files are read
 - If the Parts window is closed while customized external part DLL information remains loaded, and then the Parts window is opened again

2.2 Unload

Operation steps

- (1) Select [Customize] menu → [Unload] from the menu bar in the Parts window.
- (2) This unloads (removes) all of the customized external part DLLs that are currently loaded in the simulator. Parts that have been created by the Parts window's customization function are deleted from the Parts window. Also, if there are any programs that have been customized via a user window, the user window is closed.

CHAPTER 3 PROGRAMMING

3.1 Programming Configuration and Processing Flow

This chapter describes the basic programming used for customization via the Parts window and customization via the user window.

3.1.1 Customization via Parts window

Configuration

The configuration includes user functions that are called only once after the DllMain function (required to create DLL files) and the DLL files have been loaded.


Function references described in Chapter 4 must be included either in user functions or in functions subordinate to user functions.

Processing flow

The simulator's external parts block is used to create parts based on the specified function's part information and performs all simulation related to parts associated with the simulator's external parts block.

Figure 3-1 shows the relation between user-created DLL files and external parts in the simulator, as well as the configuration of functions.

Figure 3-1. Programming Configuration and Processing Flow for Customization via Parts Window

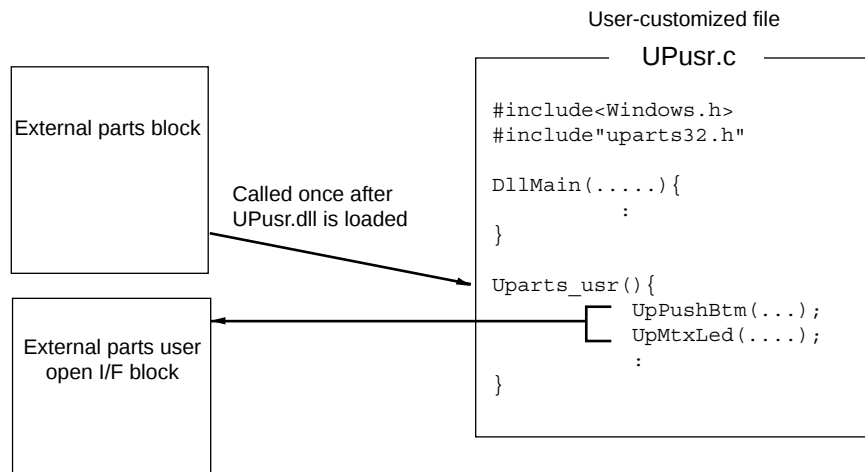

3.1.2 Customization via user window

Configuration

The configuration includes the DllMain function (required to create DLL files), the created window's callback functions, user functions, and simulation call functions that are called at a set interval during simulations.


User functions and their subordinate functions are used to report simulation call functions and the motor pin names. The creation of parts and programming of I/O actions are done using the user-created window's callback functions and simulation call functions.

Processing flow

Simulation of customized parts is performed as the simulator works with the external parts block using functions that capture and set I/O information on pins and ports. The pin output information also can be redrawn (or otherwise processed) by calling simulation call functions from the external parts block.

Figure 3-2 shows the relation between DLL files customized via a user-created window and external parts in the simulator, as well as the configuration of functions.

Figure 3-2. Programming Configuration and Processing Flow for Customization via User Window

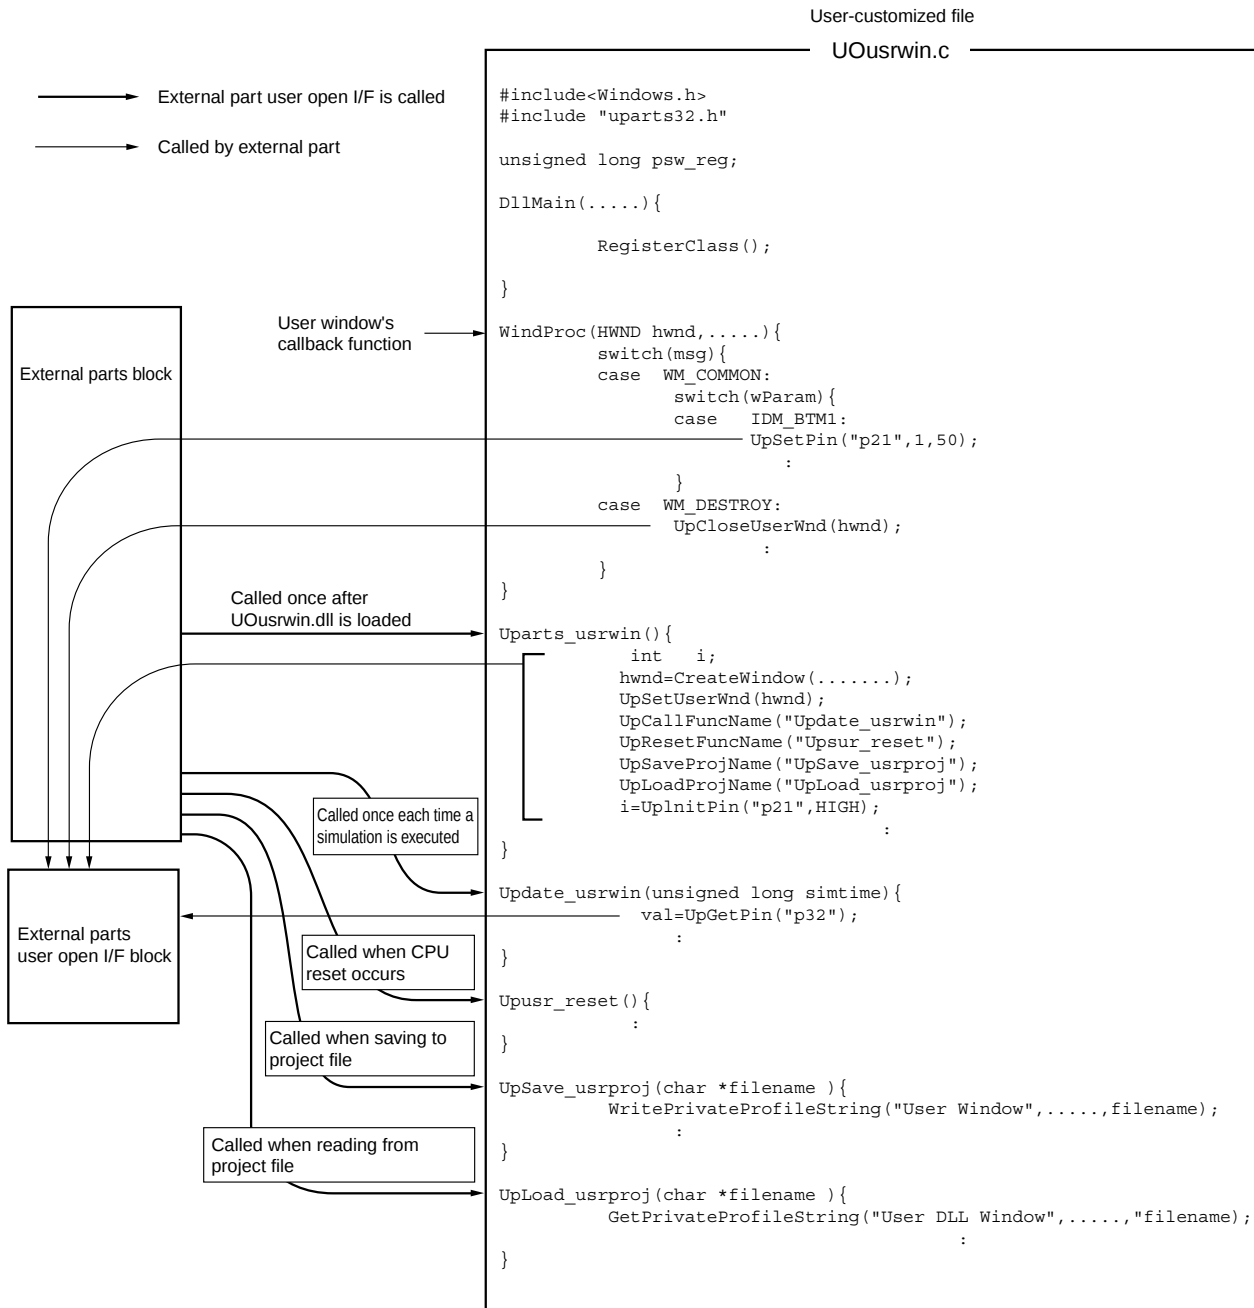

3.2 Steps in Creation of Customized Parts

3.2.1 Customization via Parts window


1. Program the external parts to be customized when creating a DLL file using Windows programming methods. Be sure to include the file "uparts32.h" in this programming and add "uparts32.cpp" to the project.
2. Use Windows programming methods to create a module definition (DEF) file^{Note}, a make file, and, if necessary, a resource file, then compile to create a user-created DLL file.
 - When compiling, specify the option (/Zp1) for single-byte alignment of structure members.
 - Specify "UP" as the first two characters in the name of the created DLL file.
 - To operate the DLL file in an environment in which Microsoft Visual C++ is not installed, create the DLL file using the released version.
3. Enter the user-created DLL file name in the place for specifying the simulator's external parts customization files (See **2.1 Download**).
4. In addition to the standard parts that are already displayed in the Parts window, the user-created customized parts are displayed.
5. Set the Parts window to location mode and locate the parts.
6. Select [Save As...] from [File] menu of the Parts window and save the current status so that there will not be any need to load the user-created DLL files when performing the next simulation.

3.2.2 Customization via user window

1. Program the external parts to be customized when creating a DLL file using Windows programming methods. Be sure to include the file "uparts32.h" in this programming and add "uparts32.cpp" to the project.
2. Use Windows programming methods to create a module definition (DEF) file^{Note}, a make file, and, if necessary, a resource file, then compile to create a user-created DLL file.
 - When compiling, specify the option (/Zp1) for single-byte alignment of structure members.
 - Specify "UO" as the first two characters in the name of the created DLL file.
 - To operate the DLL file in an environment in which Microsoft Visual C++ is not installed, create the DLL file using the released version.
3. Enter the user-created DLL file name in the place for specifying the simulator's external parts customization files (See **2.1 Download**).
4. The window created by the user and the corresponding customized parts are displayed.

Note See **3.4 Module Definition (DEF) File**.

Figure 3-3. Creation Flow

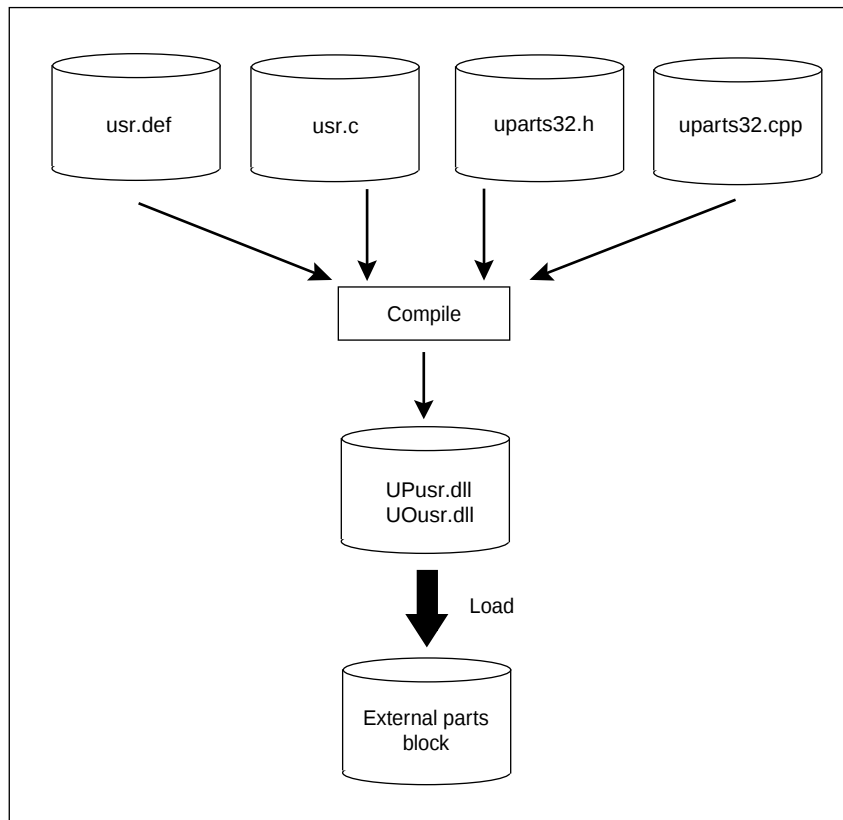

3.3 Basic Rules

The basic rules for user programming of customized parts are described below.

3.3.1 User functions

User functions are main functions that are described by users.

- (1) When a user-created DLL file is loaded to the simulator, it becomes a function that is called by the simulator.
- (2) The function references described in Chapter 4 must be contained in user functions or functions that are subordinate to user functions.
- (3) User function names are function names in which the name of the user-created DLL file minus the first two characters is added to "UParts_".
- (4) The first two characters of the user-created DLL file name are fixed.
 - (a) Customization via Parts window
Always use "UP" as the first two characters of the user-created DLL file name.
Example: UPusr.dll → UParts_usr()
 - (b) Customization via user window
Always use "UO" as the first two characters of the user-created DLL file name.
Example: UOusr.dll → UParts_usr()
- (5) Use void type with no parameters for user functions.
- (6) Enter an EXPORTS declaration^{Note} in the module definition file for user functions.

Note See 3.4.1 EXPORTS declaration.

3.3.2 External variables

When using external variables, always add "UP" to the start.

Example: int UPglobal

3.3.3 Function names

Function names are the names that are given to user-created external parts.

If you do not wish to use a function name as the part name, enter a NULL string as the parameter of the function used to create the part.

3.3.4 Active high/low

The "active high/low" designation specifies the relation between a pin's value and its active state (when a part connected to a pin is operating). If the function used to create a part includes a parameter for specifying "active high/low," specify one of the following macros (the macros "HIGH" and "LOW" are defined in uparts32.h).

Operation using 1 (high): HIGH

Operation using 0 (low): LOW

3.3.5 Pin names

Some of the parameters in functions used to create parts are for specifying pin names or port names. In such cases, each pin name or port name is specified as a character string, and its name should be as described in the target device's User's Manual. Specifications are not case-sensitive.

3.3.6 Include file , Source file

The include file "uparts32.h" and source file "uparts32.cpp" that are used for user customization are bundled in the SM850 product package. Include "uparts32.h" and add "uparts32.cpp" to the project.

- "uparts32.h" contains descriptions of macro definitions for active high/low status, and IMPORTS declarations for functions described in **CHAPTER 4 FUNCTION REFERENCE**.
- When compiling, be sure to set the include path in the directory where the file "uparts32.h" is located.

3.4 Module Definition (DEF) File

A module definition (DEF) file must be created to include the EXPORTS declaration, as described in the module definition file for Windows programming.

The IMPORTS declaration is already included in the file "Uparts32.h" and therefore does not need to be considered.

3.4.1 EXPORTS declaration

Be sure to enter an EXPORTS declaration for user functions and simulation call functions.

You must also enter an EXPORTS declaration for functions used to read or save project files, for reset functions, and some other functions.

Example: EXPORTS UParts_usrwin
 UPdata_usrwin

CHAPTER 4 FUNCTION REFERENCE

4.1 Customization via Parts window

The functions that can be called from within user functions and pasted into the Parts window to perform all simulation processing are listed below.

These functions can be used to easily create parts simply by specifying pins and action information as parameters.

Note, however, that even if the user has created a window, all parts that are created by this function are still pasted in the Parts window.

Table 4-1. Customization Functions Used in Parts Window

Function Name	Prototype	Page
Push-button function	UpPushBtm(<i>pname, actype, btmname</i>)	27
Toggle button function	UpTglBtm(<i>pname, actype, btmname</i>)	28
Group select button (exclusive push-button) function	UpSelectBtm(<i>gname, pnames, pnum, actype, btmnames</i>)	29
Hold time setup function	UpSetPBtmtime(<i>time</i>)	31
LED function	UpLed(<i>pname, actype, ledname, pictype</i>)	32
LED function set per port	UpPortLed(<i>portname, actype, ledname, pictype</i>)	34
Matrix LED function	UpMtxLed(<i>pnames1, pnames2, pnum1, pnum2, actype1, actype2</i>)	35
DC motor function	UpDcMtr(<i>pname, actype, mtrname</i>)	36
Stepping motor function	UpStpingMtr(<i>pnames, num, actype, reiji, step</i>)	37
Vertical scroll bar analog input function	UpScaleInterAD(<i>pname, adname</i>)	38
Reference voltage value setup function	UpSetAVref(<i>avref</i>)	39
Bitmap setup function for button	UpSetBtmBmp(<i>actbmp, nactbmp</i>)	40
Bitmap setup function for LED	UpSetLedBmp(<i>actbmp, nactbmp</i>)	41
Bitmap setup function for DC motor	UpSetMtrBmp(<i>actbmp, nactbmp</i>)	42
LED picture setup function	UpSetLedPic(<i>type, color</i>)	43
Serial pin data input function	UpSerial_data(<i>serpname, data, count, first, bitnum</i>)	44
Window title function	UpPanelTitleName(<i>title</i>)	45
Bitmap display function	UpSetUsrBmp(<i>bmpname</i>)	46
Character string display function	UpWriteString(<i>string</i>)	47

Push-button function

```
void      UpPushBtm(pname, actype, btmname)
char      *pname ;      /* Pin name */
int       actype ;      /* Active high/low */
char      *btmname ;    /* Function name */
```

[Function]

This function creates one push-button. A push-button is a button icon that sets and holds input status for a specified hold time only after the button has been clicked. The hold time is set using the hold time setup function UpSetPBtmtime().

The time set in UpSetPBtmtime described before this function is assumed as the hold time. If a hold time is not set, the default value 0.5 ms is used.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>actype</i>	Specifies a value to be input using a push-button. Specify HIGH to enter a "1" (high value) or LOW to enter a "0" (low value).
<i>btmname</i>	Specifies the name of the push-button function. Since this function name is displayed on the button, the character string is limited to 16 single-byte characters.

[Return value]

None

[Example]

```
UpSetPBtmtime(50) ;
UpPushBtm("p20", HIGH, "START") ;
UpPushBtm("p20", LOW, "STOP") ;
```

Figure 4-1. Push-Buttons



Toggle button function

```
void      UpTglBtm(pname, actype, btmname)
char      *pname ;          /* Pin name */
int       actype ;          /* Active high/low */
char      *btmname ;        /* Function name */
```

[Function]

This function creates one toggle button. When clicked, a toggle button sets and holds input status until the same button is clicked again.

This button's initial mode is inactive mode. The first time this button is clicked, the value specified by the parameter *actype* is input.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>actype</i>	Specifies a value to be input using the toggle button. Specify HIGH to enter a "1" (high value) or LOW to enter a "0" (low value).
<i>btmname</i>	Specifies the name of the toggle button function. Since this function name is displayed on the button, the character string is limited to 16 single-byte characters.


[Return value]

None

[Example]

```
UpTglBtm("p22", HIGH, "START") ;
UpTglBtm("p23", LOW, "STOP") ;
```

Figure 4-2. Toggle Buttons



Group select button (exclusive push-button) function

```
void      UpSelectBtm(gname, pnames, pnum, actype, btmnames)
char      *gname ;           /* Group name */
char      **pnames ;         /* Pin name */
int        pnum ;           /* Number of buttons */
int        actype ;          /* Active high/low */
char      **btmnames ;       /* Function name */
```

[Function]

Several buttons can be grouped together as exclusive buttons. Clicking one of the group of buttons that is enclosed in a frame enters an active value for the clicked button only.

The entered value remains in effect until another button is clicked. In other words, there can be only one active button at a time within the button group.

[Parameters]


<i>gname</i>	Specifies the name assigned to the group. This group name is shown at the top of the group select buttons.
<i>pnames</i>	Specifies pin names (character strings) for each button.
<i>pnum</i>	Specifies the number of buttons.
<i>actype</i>	Specifies the value entered by clicking a group select button. Specify HIGH to enter a "1" (high value) or LOW to enter a "0" (low value). The active status for all group buttons is the same.
<i>btmnames</i>	Specifies the names assigned to individual buttons. Since this function name is displayed on the button, the character string is limited to 10 single-byte characters.

[Return value]

None

[Example]

```
static char *sizePin[4] = {"p30", "p31", "p32", "p33"} ;  
static char *sizeName[4] = {"B5", "A4", "B4", "A3"} ;  
UpSelectBtm("Size", sizePin, 4, HIGH, sizeName) ;
```

Figure 4-3. Group Select Buttons

Hold time setup function

```
void      UpSetPBtmtime(time)  
char      *time ;          /* Hold time */
```

[Function]

This function specifies the hold time for a push-button.

[Parameter]

<i>time</i>	Sets a hold time character string. The unit for this setting is ms (milliseconds). The range of settings is 0.001 to 999 ms.
-------------	---

[Return value]

None

[Example]

```
UpSetPBtmtime("0.2") ;
```

LED function

```

void      UpLed(pname, actype, ledname, pictype)
char      *pname ;          /* Pin name */
int       actype ;          /* Active high/low */
char      *ledname ;        /* Function name */
char      pictype ;         /* Picture type */

```

[Function]

This function creates one LED.

When the specified pin's status is active, an active bitmap (or color picture) is displayed. When the pin's status is inactive, an inactive bitmap (or colorless picture) is displayed.

[Parameters]


<i>pname</i>	Specifies the pin name as a character string.
<i>actype</i>	Specifies the value to be displayed on the LED. Specify "1" for active high or "0" for active low.
<i>ledname</i>	Specifies the LED's function name. This function name is shown on the LED. There is no limit on the number of characters.
<i>pictype</i>	Specifies the type of picture (or bitmap image) used in the LED display. - If 1: The default bitmap type is a light bulb-type bitmap image. However, any bitmap specified by the UpSetLedBmp() function is displayed instead of the default bitmap. - If 0: The default picture type is a rectangular picture. Any picture specified by the UpSetLedPic() function is displayed instead of the default picture.

[Return value]

None

[Example]

```
UpLed("p40", LOW, "Reserved", 1);  
UpLed("p21", HIGH, "Power", 1);
```

Figure 4-4. Bitmap Images for Inactive LED (Left) and Active LED (Right)

```
UpLed("p41", LOW, "L", 0);  
UpLed("p22", HIGH, "H", 0);
```

Figure 4-5. Pictures for Inactive LED (Left) and Active LED (Right)

LED function set per port

```

void      UpPortLed(portname, actype, ledname, pictype)
char      *portname ;      /* Port name */
unsigned char  actype ;      /* Active high/low */
char      *ledname ;      /* Function name */
char      pictype ;      /* Picture type */

```

[Function]

This function creates a set of LEDs corresponding to pins assigned to a particular port (eight LEDs make one set). An active bitmap (or color picture) is displayed for each pin that is active and an inactive bitmap (or colorless picture) is displayed for each pin that is inactive.

[Parameters]

<i>portname</i>	Specifies the port name as a character string.
<i>actype</i>	Specifies the value for displaying an active bitmap. Specify "1" if a value of "1" (high) is active or specify "0" if a value of "0" (low) is active. The 8-bit data that sets the status of eight LEDs is specified bitwise. The port's lowest pin is specified as the LSB, then the other seven bits are specified in order from LSB to MSB.
<i>ledname</i>	Specifies a name to be assigned to an LED. This function name is shown below the bitmap. There is no limit on the number of characters.
<i>pictype</i>	Specifies the picture type used in the LED display. "1" specifies bitmap and "0" specifies a rectangular picture.


[Return value]

None

[Example]

```
UpPortLed("p3",0xfc,"Number",1) ;
```

Figure 4-6. LED Function Set Per Port

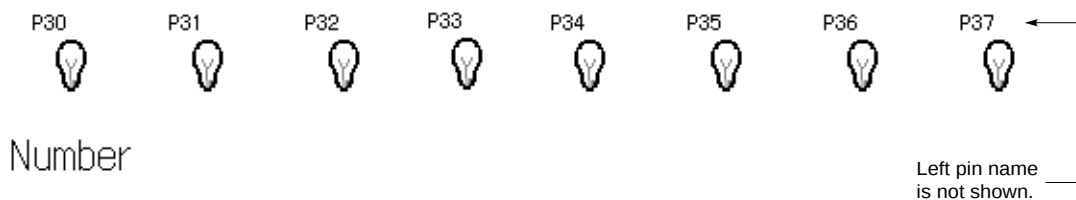

Matrix LED function

```
void      UpMtxLed(pnames1, pnames2, pnum1, pnum2, actype1, actype2)
char      **pnames1 ;      /* Output 1 pin names */
char      **pnames2 ;      /* Output 2 pin names */
int       pnum1 ;          /* Output 1 pin number */
int       pnum2 ;          /* Output 2 pin number */
int       actype1 ;        /* Active high/low for output 1*/
int       actype2 ;        /* Active high/low for output 2*/
```

[Function]

This function creates an LED on a matrix. When any intersection is active on the matrix of the output 1 and output 2 pins, a matrix LED showing the active bitmap is created (the active bitmap is fixed and cannot be specified).

[Parameters]

pnames1 Specifies the output 1 pin names (character strings) for all output 1 pins only.
pnames2 Specifies the output 2 pin names (character strings) for all output 2 pins only.
pnum1 Specifies the number of output 1 pins.
pnum2 Specifies the number of output 2 pins.
actype1 Specifies the value for displaying output 1. Specify "1" for active high status or "0" for active low status. The active status for output 1 is the same for all output 1 pins.
actype2 Specifies the value for displaying output 2. Specify "HIGH" for active high status or "LOW" for active low status. The active status for output 2 is the same for all output 2 pins.


[Return value]

None

[Example]

```
static char *out1[4] = {"p30", "p31", "p32", "p33"} ;
static char *out2[4] = {"p24", "p25", "p26", "p27"} ;
UpMtxLed((char *)out1, (char *)out2, 4, 4, HIGH, HIGH) ;
```

Figure 4-7. Matrix LED Function

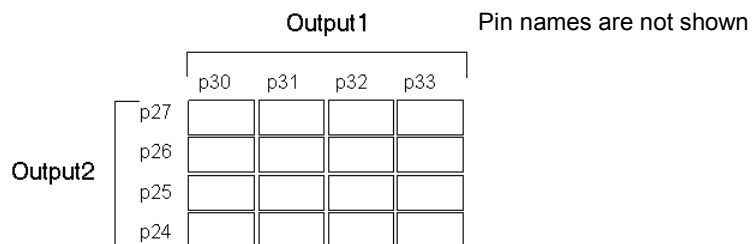

DC motor function

```
void      UpDcMtr(pname, actype, mtrname)
char      *pname ;      /* Pin name */
int       actype ;      /* Active high/low */
char      *mtrname ;    /* Function name */
```

[Function]

This function creates a DC motor icon. An active bitmap is displayed when the specified pin becomes active, and the inactive bitmap is displayed when the specified pin is inactive.

This function also displays the total active time that has elapsed since the start of a simulation. The displayed time is based on the main system clock. When a reset occurs or when the elapsed time value exceeds a 10-digit decimal value, the displayed time is cleared to zero.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>actype</i>	Specifies the status when the motor is displayed as active. Specify HIGH for active high status or LOW for active low status.
<i>mtrname</i>	Specifies the DC motor function's name. This function name is shown under the motor icon.


[Return value]

None

[Example]

```
UpDcMtr("p41", HIGH, "Motor") ;
```

Figure 4-8. Active LED (Left) and Inactive LED (Right)



Stepping motor function

```
void      UpStpingMtr(pnames, num, actype, reiji, step)
char      **pnames ;      /* Pin names */
int       num ;          /* Number of pins per channel */
int       actype ;       /* Active high/low */
char      reiji ;        /* Excitation method */
short     step ;         /* Minimum step angle */
```

[Function]

This function creates a stepping motor that is operated via several pins.

The motor is displayed according to its direction of rotation, with the rotation speed and step angles.

[Parameters]

<i>pname</i>	Specifies pin names (character strings) for all pins.
<i>num</i>	Specifies the number of pins per channel (4 or 8).
<i>actype</i>	Specifies the status when the motor is displayed as active. Specify HIGH for active high status or LOW for active low status. The active status is the same for all pins.
<i>reiji</i>	Specifies the excitation method. Set "0" for single phase or "1" for single/dual phase.
<i>step</i>	Specifies an integer fraction of 360 as the minimum step angle.

[Return value]

None


[Remarks]

Once operation of this function is started, the first value other than zero that is output to a connected pin is taken as the initial value. At that point, the stepping motor is shown as stopped (not rotating).

[Example]

```
char *mtrpin[4] = {"p00", "p01", "p02", "p03"} ;
UpStpingMtr((char *)mtrpin, 4, HIGH, 1, 10) ;
```

Figure 4-9. Stepping Motor

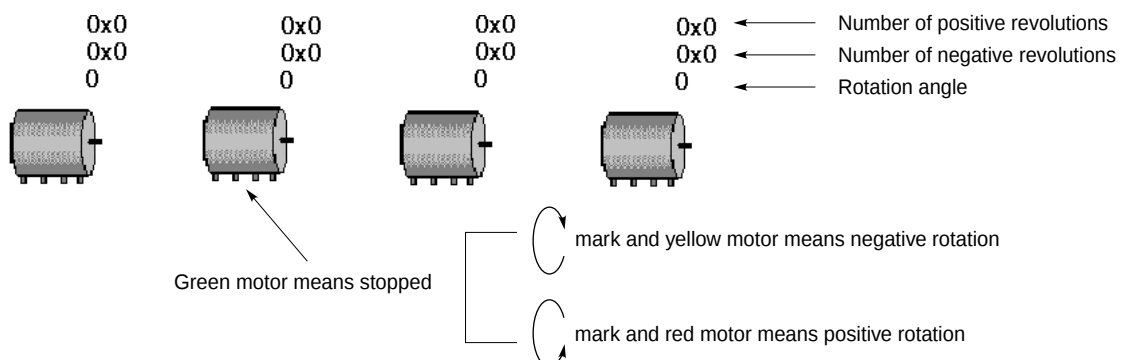

Vertical scroll bar analog input function

```
void      UpScaleInterAD(pname, adname)
char      *pname ;      /* Pin name */
char      *adname ;     /* Function name */
```

[Function]

This function creates an analog input part for a vertical scroll bar.

Move the scroll button and right-click the mouse over the scroll bar to enable input of analog data. Input values are used to create a part that is shown in red.

[Parameters]

pname Specifies the name of analog input pin as a character string.
adname Specifies the function name of the scroll bar-type input part. This function name is displayed above the scroll bar-type input part and there is no limit on the number of characters.

[Return value]

None

[Remarks]


The scroll bar's operating range is determined either by settings made via the reference voltage value setup function UpSetAVref() or by the reference voltage value settings made via the Standard Level Gauge Pin Setting dialog box^{Note}. If neither of these settings have been made, the default value of 5.0 V is used.

Note See CHAPTER 7 WINDOW REFERENCE in the SM850 V2.50 System Simulator Operation (U16218E).

[Example]

```
UpScaleInterAD("ani1", "Voltage") ;
```

Figure 4-10. Vertical Scroll Bar Analog Input



Reference voltage value setup function

```
void      UpSetAVref(avref)  
char      *avref;          /* Reference voltage value */
```

[Function]

This function sets the reference voltage value for the A/D converter.

This reference voltage value is used to determine the operating range for an analog input part.

Any setting that is within the range for operating power supply voltage (see the User's Manual of each device) can be set.

Values can be set as precisely as the first decimal place, but subsequent decimal places are rounded off.

[Parameter]

avref Specifies the reference voltage value as a character string.

[Return value]

None

[Remarks]

If this function or the standard setting is not set, the analog input part will operate using the default voltage value of 5.0 V.

[Example]

```
UpSetAVref("3.5");
```

Bitmap setup function for button

```
void      UpSetBtmBmp(actbmp, nactbmp)
char      *actbmp ;      /* Active bitmap name character string */
char      *nactbmp ;      /* Inactive bitmap name character string */
```

[Function]

This function sets the bitmap for a button. A button display can be changed by entering this function immediately before the target button's function. The same bitmap will be displayed until it is set again by this function. The bitmap file should be stored in the same directory as the simulator or its name should be specified with the full path.

[Parameters]

<i>actbmp</i>	Specifies a character string for the bitmap file name displayed when active.
<i>nactbmp</i>	Specifies a character string for the bitmap file name displayed when inactive.

[Return value]

None

[Remarks]

If a button function is described without describing this function first, the standard button's bitmap is displayed (see the image shown in **Figure 4-1**). The button name is not shown when setting this function.

[Example]

```
UpSetBtmBmp("on.bmp", "off.bmp") ;
UpPushBtm("p21", LOW, "START") ;
```

Bitmap setup function for LED

```
void          UpSetLedBmp(actbmp, nactbmp)  
char          *actbmp ;          /* Active bitmap name character string */  
char          *nactbmp ;          /* Inactive bitmap name character string */
```

[Function]

This function sets the bitmap for an LED. An LED display can be changed by entering this function immediately before the target LED's function. This function is valid only if the bitmap has been specified by an LED function. The same bitmap will be displayed until it is set again by this function. The bitmap file should be stored in the same directory as the simulator or its name should be specified with the full path.

[Parameters]

<i>actbmp</i>	Specifies a character string for the bitmap file name displayed when active.
<i>nactbmp</i>	Specifies a character string for the bitmap file name displayed when inactive.

[Return value]

None

[Remarks]

If an LED function is described without describing this function first, the standard LED's bitmap is displayed (see the image shown in **Figure 4-4**).

[Example]

```
UpSetLedBmp("lighton.bmp", "lightoff.bmp") ;  
UpLed("p31", HIGH, "Power", 1) ;
```

Bitmap setup function for DC motor

```
void          UpSetMtrBmp(actbmp, nactbmp)
char          *actbmp ;      /* Active bitmap name character string */
char          *nactbmp ;      /* Inactive bitmap name character string */
```

[Function]

This function sets the bitmap for a DC motor. A DC motor display can be changed by entering this function immediately before the target DC motor's function. The same bitmap will be displayed until it is set again by this function. The bitmap file should be stored in the same directory as the simulator or its name should be specified with the full path.

[Parameters]

<i>actbmp</i>	Specifies a character string for the bitmap file name displayed when active.
<i>nactbmp</i>	Specifies a character string for the bitmap file name displayed when inactive.

[Return value]

None

[Remarks]

If a DC motor function is described without describing this function first, the standard DC motor's bitmap is displayed (see the image shown in **Figure 4-8**).

[Example]

```
UpSetMtrBmp("trun.bmp", "stop.bmp") ;
UpDcMtr("p32", HIGH, "Motor") ;
```

LED picture setup function

```
void      UpSetLedPic(type, color)
char      type ;           /* Picture type */
char      color ;          /* Picture fill color when active */
```

[Function]

This function sets the type of picture and fill color (when active) to be used in an LED display. An LED display can be changed by entering this function immediately before the target LED's function. This function is valid only if a picture has been specified by an LED function. The same picture will be displayed until it is set again by this function.

[Parameters]

<i>type</i>	Specifies the type of picture (macro is defined in uparts32.h). Macro PIC_RECT: Rectangle Macro PIC_ELL: Ellipse
<i>color</i>	Specifies fill color when active (macro is defined in uparts32.h). Macro PIC_RED: Red Macro PIC_YELLOW: Yellow Macro PIC_GREEN: Green

[Return value]

None

[Example]

```
UpSetLedPic(PIC_RECT, PIC_GREEN) ;
UpLed("p32", HIGH, "Test", 0) ;
```

Serial pin data input function

```
void      UpSerial_data(serpname, data, count, first, bitnum)
char      *serpname ;      /* Serial pin name character string */
unsigned short *data ;      /* Pointer to data array */
unsigned short count ;      /* Number of data arrays */
char      first ;          /* First bit (MSB or LSB)*/
char      bitnum ;         /* Number of bits in transfer data */
```

[Function]

This function sets values in order starting from the specified first data bit, using the number of bits in the data transferred to the serial pin as one unit.

[Parameters]

<i>serpname</i>	Specifies the character string for the name of the serial data input pin.
<i>data</i>	Specifies a pointer to an array in which the value set to the serial data input pin has been stored in units consisting of the number of transfer data bits.
<i>count</i>	Specifies the number of arrays in which values set to the serial data input pin have been stored in units consisting of the number of transfer data bits.
<i>first</i>	Specifies whether data equivalent to the number of bits in the transfer data will be set sequentially with the MSB first or the LSB first. "1" is specified to set sequentially with the MSB first and "0" is specified to set sequentially with the LSB first.
<i>bitnum</i>	Specifies the number of bits in the transfer data. When using UART (Universal Asynchronous Receiver/Transmitter), the start bit, parity bit, and stop bit are included in the data and data bit count.

[Return value]

None

[Example]

To set 8-bit data sequentially from LSB first to serial pin SER1:

```
unsigned short data[3] = {0xff, 0xa0, 0x3b} ;
Upserial_data("SER1", data, 3, 0, 8) ;
```

The data is input to SER1 as shown below.

```
← 111111110000010111011100
```

Window title function

```
void      UpPanelTitleName(title)  
char      *title ;          /* Title name */
```

[Function]

This function displays a name in the title bar of the Parts window.

[Parameter]

title Specifies the character string for the name to be displayed in the title bar of the Parts window.

[Return value]

None

[Example]

```
UpPanelTitleName("System for printer") ;
```

Bitmap display function

```
void          UpSetUsrBmp(bmpname)  
char          *bmpname ;      /* Bitmap file name */
```

[Function]

This function displays a bitmap that is always displayed, without any relation to simulations.

The bitmap is displayed to the right of the part that is at the bottom right in the set of currently displayed parts. If there is not enough room in the window to display the bitmap to the right of the bottom right part, it is displayed below the bottom right part.

[Parameter]

<i>bmpname</i>	Specifies a character string as the bitmap file name. The bitmap file should be stored in the same directory as the simulator or its name should be specified with the full path.
----------------	---

[Return value]

None

[Example]

```
UpSetUsrBmp("printer.bmp") ;
```

Character string display function

```
void      UpWriteString(string)  
char      *string ;      /* Character string to be displayed */
```

[Function]

This function displays a character string.

The character string is displayed to the right of the part that is at the bottom right in the set of currently displayed parts. If there is not enough room in the window to display the character string to the right of the bottom right part, it is displayed below the bottom right part.

[Parameter]

string Specifies the character string to be displayed.

[Return value]

None

[Example]

```
UpWriteString("Power") ;
```

4.2 Customization via User Window

The following functions are provided to enable the user to freely customize user-created windows and parts. The handle notification function for user windows can be used to enable processing of windows and input from user parts, and the simulation call function can be used to perform output display processing to user parts.

Table 4-2. Customization Functions Used in User Window

Function Name	Prototype	Page
Window handle notification function	UpSetUserWnd(<i>hUwnd</i>)	49
Window close function	UpCloseUserWnd(<i>hwnd</i>)	50
Simulation call function	UpCallFuncName(<i>fname</i>)	51
Motor pin notification function	UpInitMtrPin(<i>pname, actype</i>)	52
Stepping motor notification function	UpInitStpingMtr(<i>pname, num, actype, reiji, step</i>)	53
Pin active value notification function	UpInitPin(<i>pname, actype</i>)	54
Port active value notification function	UpInitPort(<i>portname, actype</i>)	55
AD input pin notification function	UpInitAD(<i>pname</i>)	56
Project file read function name notification function	UpLoadProjName(<i>funcname</i>)	57
Project file save function name notification function	UpSaveProjName(<i>funcname</i>)	58
Reset function name notification function	UpResetFuncName(<i>funcname</i>)	59
Pin value capture function	UpGetPin(<i>pname, val</i>)	60
Port data capture function	UpGetPort(<i>portname, data</i>)	61
DA output pin value capture function	UpGetDA(<i>pname, val</i>)	62
Memory area data capture function	UpGetMem(<i>addr, data</i>)	63
DC motor active time clear function	UpClrMtrAcClk(<i>pname</i>)	64
Stepping motor information capture function	UpGetStpingMtr(<i>pnames, num, posrev, negrev, angle</i>)	65
Value setting function for pins	UpSetPin(<i>pname, val, time</i>)	66
Data setting function for ports	UpSetPort(<i>portname, data, time</i>)	67
Value setting function for AD input pin	UpSetAD(<i>pname, val</i>)	68
Data setting function for memory area	UpSetMem(<i>addr, data</i>)	69
Active time notification function for motor	UpGetMtrAcClk(<i>pname, val, actime</i>)	70
Time conversion notification for one main system clock pulse	UpSimtimeSec(<i>void</i>)	71
Function for transmitting packets from HOST using USB function	UpSetUSBPack(<i>total, total_bit, data</i>)	72
Function for receiving packets from Function using USB function	UpGetUSBPack(<i>total, data</i>)	73
Function for transmitting signals from HOST using USB function	UpSetUSBSig(<i>sig</i>)	74
Function for receiving signals from Function using USB function	UpGetUSBSig(<i>sig</i>)	75

Window handle notification function

```
void          UpSetUserWnd(hUwnd)  
HANDLE       hUwnd ;          /* Handle of user window */
```

[Function]

This function notifies the simulator of a user-created window handle.

The user should describe this function immediately after creating a window.

[Parameter]

<i>hUwnd</i>	Handle of a user-created window
--------------	---------------------------------

[Return value]

None

[Example]

```
HWND  hwnd ;  
hwnd = CreateWindow(.....) ;  
UpSetUserWnd(hwnd) ;
```

Window close function

```
void          UpCloseUserWnd(hwnd)
HWND         hwnd ;          /* Handle of window to be closed */
```

[Function]

This function notifies the simulator that a user-created window is being closed.

This function is described with the user-created window callback function's message WM_DESTROY.

[Parameter]

hwnd Handle of user-created window to be closed

[Return value]

None

[Example]

```
WM_DESTROY:
:
:
UpCloseUserWnd(hwnd) ;
```

Simulation call function

```
void      UpCallFuncName(fname)  
char      *fname ;      /* Simulation call function name */
```

[Function]

This function reports the name of the function that is called from the simulator at a specified interval^{Note} during simulation.

This function must be described within the user function UParts_xxx().

Note This function is called once per command execution.

[Parameter]

fname Specifies the name of the function called from the simulator.

[Return value]

None

[Remarks]

The simulation call function should be specified as follows in the function specifications.

The simulation's execution time is received via an unsigned long type parameter.

The simulation's execution time is time that has elapsed since the previous function call, and its measurement unit is the main system clock.

Be sure to enter an EXPORTS declaration (see **3.4.1 EXPORTS declaration**) in a module definition file for the simulation call function.

```
void Update_usrwin(unsigned long simtime)
```

[Example]

```
UpCallFuncName("Update_usrwin") ;
```

Motor pin notification function

```
void      UpInitMtrPin(pname, actype)
char      *pname ;      /* Pin name */
int       actype ;      /* Active high/low */
```

[Function]

This function reports the pin name specified for the motor to capture the motor value and active time via the active time notification function for motor.

When using the motor pin, this function must be described within the user function UParts_xxx().

When not using the motor pin, there is no need to describe this function.

[Parameters]

<i>pname</i>	Specifies a character string for the name of the pin connected to the motor.
<i>actype</i>	Specifies that the motor is in active mode. Specify HIGH for active high status or LOW for active low status.

[Return value]

None

[Remarks]

Unless notification is already included in the user function, even if the information is captured by the active time notification function for motor UpGetMtrAcClk() during a simulation, the captured value is not guaranteed.

[Example]

```
UpInitMtrPin("p41", HIGH)
```

Stepping motor notification function

```

int          UpInitStpingMtr(pnames, num, actype, reiji, step)
char         **pnames ;      /* Pin name */
int          num ;           /* Number of pins per channel */
int          actype ;        /* Active high/low */
char         reiji ;         /* Excitation method */
short        step ;          /* Minimum step angle */

```

[Function]

This function connects a stepping motor that is operated via several pins to the specified pin.

When using the stepping motor, this function must be described within the user function UParts_xxx(). When not using the stepping motor, there is no need to describe this function.

[Parameters]

<i>pnames</i>	Specifies pin names (character strings) for all pins.
<i>num</i>	Specifies the number of pins per channel (4 or 8).
<i>actype</i>	Specifies the status when the motor is displayed as active. Specify HIGH for active high status or LOW for active low status. The active status is the same for all pins.
<i>reiji</i>	Specifies the excitation method. Set "0" for single phase or "1" for single/dual phase.
<i>step</i>	Specifies an integer fraction of 360 as the minimum step angle.

[Return value]

If set correctly: 1
If not set correctly: 0

[Example]

```

char *mtrpin[4] = {"p00", "p01", "p02", "p03"};
UpInitStpingMtr((char *)mtrpin, 4, HIGH, 1, 10);

```

Pin active value notification function

```
int      UpInitPin(pname, actype)
char     *pname ;      /* Pin name */
int      actype ;      /* Active value of pin */
```

[Function]

This function sets the active mode value for one pin.

When there is a value to be input for a pin, this function must be described within the user function UParts_xxx().

When there is no value to be input for a pin, there is no need to describe this function.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>actype</i>	Specifies the active value of a pin. Specify HIGH for active high status or LOW for active low status.

[Return value]

If pin's active value was set correctly: 1

If pin's active value was not set correctly: 0

[Example]

When set to operate when pin P46 is active high (when input value = 1):

```
int ret ;
ret=UpInitPin("P46", HIGH) ;
```

Port active value notification function

```
int          UpInitPort(portname, actype)
char         *portname ;      /* Port name */
unsigned char actype ;         /* Active value of port */
```

[Function]

This function sets the active mode value for one port.

When there is a value to be input for a port, this function must be described within the user function UParts_xxx().

When there is no value to be input for a port, there is no need to describe this function.

[Parameters]

<i>portname</i>	Specifies the port name as a character string.
<i>actype</i>	Specifies the active value for each pin of a port. Specify "1" for port pins that have active high status or "0" for port pins that have active low status. Values are specified bitwise for 8 bits, starting from the port's lowest pin as the LSB.

[Return value]

If port's active value was set correctly: 1

If port's active value was not set correctly: 0

[Example]

When port 4's pins P40 and P41 are set as active high and pins P42 to P47 are set as active low:

```
int ret ;
ret=UpInitPort("P4", 0x03) ;
```

When port 2's pin P27 only is set as active high and pins P20 to P26 are set as active low:

```
int ret ;
ret=UpInitPort("P2", 0x80) ;
```

AD input pin notification function

```
int          UpInitAD(pname)  
char        *pname ;      /* AD input pin name */
```

[Function]

This function notifies the simulator of the AD input pin used to input a value from the user open interface function. If UpSetAD() includes a value to be input to the AD input pin, this function must be described within the user function UParts_xxx(). When the user open interface function does not include a value to be input to the AD input pin, there is no need to describe this function.

[Parameter]

pname Specifies the AD input pin name as a character string.

[Return value]

Normal end: 1

Abnormal end: 0 (if the AD input pin does not exist in a device used in the current simulation)

[Example]

```
UpInitAD("ANI0") ;
```

Project file read function name notification function

```
int          UploadProjName(funcname)
char         *funcname ;      /* Project file read function name */
```

[Function]

When the simulator's project file is being read, this function reports the name of the function that simultaneously reads the information in the user window from the project file.

This function must be described within the user function UParts_xxx().

[Parameter]

<i>funcname</i>	Specifies the name of the function that reads the project file that has been called from the simulator.
-----------------	---

[Return value]

None

[Remarks]

The project file read function's specifications are as follows.

- The project file name character string is received via the char * type parameter.
- User window information is also read from the file named by the project file name that was received via the parameter. At that time, select either the GetPrivateProfileString or GetPrivateProfileInt function for the library used with the read operation.
- The section name used by the user is "User DLL Window".
- An EXPORTS declaration is required in a module definition file for the project file read function.

```
void Upload_usrproj(char *filename)
```

[Example]

```
UploadProjName("Upload_usrproj") ;
```

Project file save function name notification function

```
int          UpSaveProjName(funcname)
char         *funcname ;      /* Project file save function name */
```

[Function]

When the simulator's project file is being saved, this function reports the name of the function that simultaneously saves the information in the user window to the project file.

This function must be described within the user function UParts_xxx().

[Parameter]

funcname Specifies the name of the function that saves the project file that has been called from the simulator.

[Return value]

None

[Remarks]

The project file save function's specifications are as follows.

- The project file name character string is received via the char * type parameter.
- User window information is also written to the file named by the project file name that was received via the parameter. At that time, select the WritePrivateProfileString function for the library used with the write operation.
- The section name used by the user is "User DLL Window".
- An EXPORTS declaration is required in a module definition file for the project file save function.

```
void UpSave_usrproj(char *filename)
```

[Example]

```
UpSaveProjName("UpSave_usrproj") ;
```

Reset function name notification function

```
int          UpResetFuncName(funcname)
char         *funcname ;      /* Reset function name */
```

[Function]

When a CPU reset is called by the simulator, this function reports the function name that is used for the user window's reset processing.

This function must be described within the user function UParts_xxx().

[Parameter]

funcname Specifies the name of the reset function called by the simulator.

[Return value]

None

[Remarks]

The reset function's specifications are as follows.

- It is a void type function since it has no parameters.
- An EXPORTS declaration is required in a module definition file for the reset function.

```
void Upreset_usrwin(void)
```

[Example]

```
UpResetFunName("Upreset_usrwin") ;
```

Pin value capture function

```
int      UpGetPin(pname, val)
char     *pname ;      /* Pin name */
char     *val ;         /* Pointer to area where pin value is stored */
```

[Function]

This function captures the value for one pin.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>val</i>	Specifies a pointer to the area where the pin value is stored.

[Return value]

If pin value was successfully captured: 1
If pin value was not successfully captured^{Note}: 0

Note "0" is also returned if the pin value is undefined.

[Example]

```
char  val ;
int   ret ;
ret = UpGetPin("p46", &val) ;
```

Port data capture function

```
int          UpGetPort(portname, data)
char         *portname ;      /* Port name */
unsigned char *data ;          /* Pointer to area where port data is stored */
```

[Function]

This function captures port data.

[Parameters]

<i>portname</i>	Specifies the port name as a character string.
<i>data</i>	Specifies a pointer to the area where the port data is stored.

[Return value]

If port data was successfully captured: 1
If port data was not successfully captured^{Note}: 0

Note "0" is also returned if the port values include any undefined values.

[Example]

```
unsigned char data ;
int ret ;
ret = UpGetPort("p4", (unsigned char *)&data) ;
```

DA output pin value capture function

```
int          UpGetDA(pname, val)
char         *pname ;      /* DA output pin name */
unsigned short *val ;      /* DA output value */
```

[Function]

This function sets the value of the DA output pin.

[Parameters]

<i>pname</i>	Specifies the DA output pin name as a character string.
<i>val</i>	Specifies a pointer to the area where the value of the DA output pin is stored.

[Return value]

Normal end: 1
Abnormal end^{Note}: 0

Note "0" is also returned if the value of the DA output pin is undefined.

[Example]

```
unsigned short daval ;
UpGetDA("ANO0", &daval) ;
```

Memory area data capture function

```
int            UpGetMem(addr, data)
unsigned long  addr;          /* Address */
unsigned char  *data;         /* Data storage area */
```

[Function]

This function captures the data in the memory area.

[Parameters]

<i>addr</i>	Specifies an address in the memory area to be captured.
<i>data</i>	Specifies the data storage area.

[Return value]

If data was successfully captured: 1
If data was not successfully captured: 0

[Example]

```
unsigned char data ;
int ret ;
ret = UpGetMem(0xffe000, (unsigned char *)&data) ;
```

DC motor active time clear function

```
void      UpClrMtrAcClk(pname)  
char      *pname ;      /* Pin name */
```

[Function]

This function zero-clears the active time of the specified motor-connected pin.

[Parameter]

pname Specifies the motor-connected pin name as a character string.

[Return value]

None

[Remarks]

When using this function, call the motor pin notification function UpInitMtrPin() from within a user function so that the pin name is reported in advance.

[Example]

```
UpClrMtrAcClk("p41") ;
```

Stepping motor information capture function

```

int          UpGetStpingMtr(pnames, num, posrev, negrev, angle)
char         **pnames ;      /* Pin names */
int          num ;           /* Number of pins per channel (specify 4 or 8) */
unsigned long *posrev ;      /* Area for storing the number of positive revolutions */
unsigned long *negrev ;      /* Area for storing the number of negative revolutions */
unsigned long *angle ;       /* Area for storing angle */

```

[Function]

This function captures the number of positive/negative revolutions and current angle of the stepping motor that is connected to the pin names previously reported by the stepping motor notification function UpInitStpingMtr.

[Parameters]

<i>pnames</i>	Specifies pin names (character strings) for all pins.
<i>num</i>	Specifies the number of pins per channel (4 or 8).
<i>posrev</i>	Specifies the area where the number of positive revolutions is stored.
<i>negrev</i>	Specifies the area where the number of negative revolutions is stored.
<i>angle</i>	Specifies the area where the angle is stored.

[Return value]

If successfully captured: 1
 If not successfully captured: 0

[Example]

```

char *mtrpin[4] = {"p00", "p01", "p02", "p03"} ;
unsigned long posrev ;
unsigned long negrev ;
unsigned long angle ;
UpInitStpingMtr((char *)mtrpin, 4, HIGH, 1, 10) ;
:
UpGetStpingMtr((char *)mtrpin, 4, &posrev, &negrev, &angle) ;

```

Value setting function for pins

```
void          UpSetPin(pname, val, time)
char          *pname ;          /* Pin name */
char          val ;              /* Active value */
unsigned long time ;             /* Hold time */
```

[Function]

This function sets a pin value.

[Parameters]

<i>pname</i>	Specifies the pin name as a character string.
<i>val</i>	Sets value when pin is active.
<i>time</i>	Sets a time for holding data. The time measurement unit is the main system clock.

[Return value]

None

[Remarks]

When using this function, call the pin active value notification function `UpInitPin()` from within a user function so that the pin name is reported in advance. If the pin active value that is reported by `UpInitPin` was set as macro `HIGH`, setting "1" as the active value for this `UpSetPin` function sets the pin to active mode. Similarly, if the pin active value that is reported by `UpInitPin` was set as macro `LOW`, setting "0" as the active value for this `UpSetPin` function sets the pin to active mode. If "0" is set as the hold time, the active value is held.

[Example]

If `UpInitPin("p31", HIGH)` is described and the pin P31 is reported as active high, the description shown below sets the active high input to be held for 50 pulses of the main system clock.

```
char val ;      val = 1 ;
UpSetPin("p31", val, 50L) ;
```

Data setting function for ports

```
void          UpSetPort(portname, data, time)
char          *portname ;      /* Port name */
unsigned char data ;           /* Data */
unsigned long time ;           /* Hold time */
```

[Function]

This function sets the data for one port.

[Parameters]

<i>portname</i>	Specifies the port name as a character string.
<i>data</i>	Specifies values set to the port.
<i>time</i>	Sets a time for holding data. The time measurement unit is the main system clock.

[Return value]

None

[Remarks]

When using this function, call the port active value notification function UpInitPort() from within a user function so that the pin names are reported in advance. If the active value of the port's pins that is reported by UpInitPort was set as active high, "1" is set bitwise, and if it was set as active low, "0" is set bitwise. If pins belonging to this port are set to active mode by this UpSetPort function, the data's bit values for the corresponding pins should be the same as the bit values corresponding to the pins whose active values were set by UpSetPort.

If "0" is set as the hold time, the active value is held.

[Example]

If UpInitPort("p4",0x03) is described and the port P4's pins P40 and P41 are reported as active high while pins P42 to P47 are reported as active low, the description shown below sets port P4's pins P40, P42, and P43 to active mode and holds the active mode for 50 pulses of the main system clock.

```
unsigned char data ;
data = 0xf1 ;
UpSetPort("p4", data, 50L) ;
```

Value setting function for AD input pin

```
int      UpSetAD(pname, val)
char     *pname ;      /* AD input pin name */
unsigned short val ;    /* AD input value */
```

[Function]

This function sets the value of the AD input pin.

[Parameters]

pname Specifies AD input pin name as a character string.
val Sets value to be input to AD input pin.

[Return value]

Normal end: 1
 Abnormal end^{Note}: 0

Note "0" is returned if the AD input pin does not exist in a device used in the current simulation.

[Remarks]

When using this function, the AD input pin connection notification function UpInitAD() must be called from within a user function so that the AD input pin name is reported in advance.

[Example]

```
unsigned short adval ;

adval = 10 ;
UpSetAD("ANI0", adval) ;
```

Data setting function for memory area

```
int                UpSetMem(addr, data)
unsigned long      addr ;           /* Address */
unsigned char      data ;           /* Data */
```

[Function]

This function sets data in a memory area.

[Parameters]

<i>addr</i>	Specifies an address in the target memory area.
<i>data</i>	Specifies data.

[Return value]

If value is set correctly: 1
If value is not set correctly: 0

[Example]

```
int ret ;
ret = UpSetMem(0xffe300, 0x72) ;
```

Active time notification function for motor

```
int          UpGetMtrAcClk(pname, val, actime)
char         *pname ;      /* Pin name */
char         *val ;        /* Value */
unsigned long *actime ;     /* Active time */
```

[Function]

This function captures the active time of the pin specified for a motor.

This function is valid only for pins connected to a motor part that has already been created using the motor pin notification function `UpInitMtrPin()`.

The active time is the total time that has elapsed since the start of a simulation. When a reset occurs or when the elapsed time value exceeds a 10-digit decimal value, the active time is cleared to zero.

The active time is measured in pulses of the main system clock.

[Parameters]

<i>pname</i>	Specifies the motor-connected pin name as a character string.
<i>val</i>	Sets the value of the pin.
<i>actime</i>	Uses a two-dimensional array to represent the active time as the total time that has elapsed since the start of a simulation. $actime[1] \times 0x100000000 + actime[0]$

Example: `actime[1] = 0x390 ; actime[0] = 0x10052688 ;`
 Total time = 0x39010052688 main system clock

[Return value]

If set pin was a pin set by DC motor function: 0
 If set pin was not a pin set by DC motor function: -1

[Remarks]

When using this function, call the motor pin notification function `UpInitMtrPin()` from within a user function so that the pin name is reported in advance.

[Example]

```
char val ;
unsigned long actime[2] ;
UpGetMtrAcClk("p41", &val, actime) ;
wsprintf(timebuf, "Rotation time = %lx%08lx \n", actime[1], actime[0]) ;
TextOut(hdc, 240, 320, timebuf, sizeof(timebuf)) ;
```

Time conversion notification for one main system clock pulse

unsigned long UpSimtimeSec(void)

[Function]

This function converts one pulse of the main system clock to a nanosecond value.

[Parameter]

None

[Return value]

The nanosecond value converted from one pulse of the main system clock is returned.

[Example]

```
unsigned long simtime ;  
simtime = UpSimtimeSec( ) ;
```

Function for transmitting packets from HOST using USB function

```

BOOL                UpSetUSBPack(total, total_bit, data)
unsigned char       total ;           /* Number of data arrays */
unsigned char       total_bit ;       /* Number of bits in transmit data */
unsigned char       *data ;           /* Pointer to packet data array */

```

[Function]

This function uses the USB function to set packet transmission information from the HOST.

[Parameters]

<i>total</i>	Specifies the number of packet data arrays.
<i>total_bit</i>	Specifies the converted total bits of the data to be transmitted.
<i>data</i>	Specifies a pointer to the packet data array to be transmitted.

[Return value]

Normal end: 1
Abnormal end: 0

[Remarks]

This function is supported only for devices that include USB function.

Function for receiving packets from Function using USB function

```
void                UpGetUSBPack(total, data)
unsigned char       total ;           /* Number of data arrays */
unsigned char       *data ;           /* Pointer to packet data array */
```

[Function]

This function uses the USB function to receive packet data from Function.

[Parameters]

<i>total</i>	Specifies the number of packet data arrays.
<i>data</i>	Specifies a pointer to the packet data array to be transmitted.

[Return value]

None

[Remarks]

This function is supported only for devices that include USB function.

Function for transmitting signals from HOST using USB function

```
void                UpSetUSBSig(sig)  
unsigned char      sig ;           /* Transmit signal ID */
```

[Function]

This function uses the USB function to transmit a signal from the HOST.

[Parameter]

<i>sig</i>	Specifies the transmit signal ID.
	0: USBreset
	1: Resume

[Return value]

None

[Remarks]

This function is supported only for devices that include USB function.

Function for receiving signals from Function using USB function

```
void                UpGetUSBSig(sig)  
unsigned char      *sig ;           /* Receive signal ID */
```

[Function]

This function uses the USB function to receive a signal from Function.

[Parameter]

<i>sig</i>	Specifies the receive signal ID.
	0: USBreset
	1: Resume

[Return value]

None

[Remarks]

This function is supported only for devices that include USB function.

CHAPTER 5 OPERATIONS DURING CPU RESET

This chapter describes the operations of custom parts when a CPU reset is triggered by the simulator debugger.

5.1 Parts Customized via Parts Window

The parts for functions that are specified by customization via the Parts window are listed below.

Table 5-1. Parts Customized via Parts Window During CPU Reset

Part Name	Status
Push-button	All are set to inactive mode.
Toggle button	All are set to inactive mode.
Group select button	All are set to non-pressed mode.
LED	All are set to inactive mode.
LED set per port	All are set to inactive mode.
Matrix LED	All are set to OFF mode.
DC motor	All are set to inactive mode and total active time is set to 0.
Stepping motor	All are set to inactive mode and the number of positive revolutions, the number of negative revolutions, and rotation angle are all set to 0.
Vertical scroll bar analog input	Input value is set to 0 and scroll bar's scroll button is set to the bottom edge.
Serial pin data input	Returns to start of data.

5.2 Parts Customized via User Window

When a CPU reset has been triggered by the simulator debugger, if the function name has already been reported by the reset function name notification function `UpResetFuncName()`, the user window's reset processing function is performed.

CHAPTER 6 PROGRAMMING EXAMPLES

This chapter presents some examples of customized parts.

Among the sources cited below:

<1> refers to the target program.

Programs are compiled and linked using the CA850 to create load module files (xxxx.OUT).

<2> and subsequent sources refer to files that are required when creating customized parts.

This manual specifies that Visual C++ is used to create dynamic link library (xxxx.DLL).

When compiling, be sure to specify the /Zp1 option. (/Zp1 option: sets single-byte alignment of structure members)

Remark The source program examples for customized parts are coded using ifdef statements and other elements that make it easier to switch from creating 16-bit dynamic link libraries to creating 32-bit dynamic link libraries.

If using SM850 V2.00 or a later version, be sure to create 32-bit dynamic link libraries.



6.1 Example of Parts Customized via Parts Window

6.1.1 Description of samples

The items displayed in the Parts window include eight LEDs and eight switches, of which two (P50 and P51) are push-buttons, two (P52 and P53) are toggle buttons, and four (P54, P55, P56, and P57) are select buttons. When a switch is set ON or OFF, its corresponding LED is also set ON or OFF.

An example is shown below.

Figure 6-1. Example of Parts Customized via Parts Window

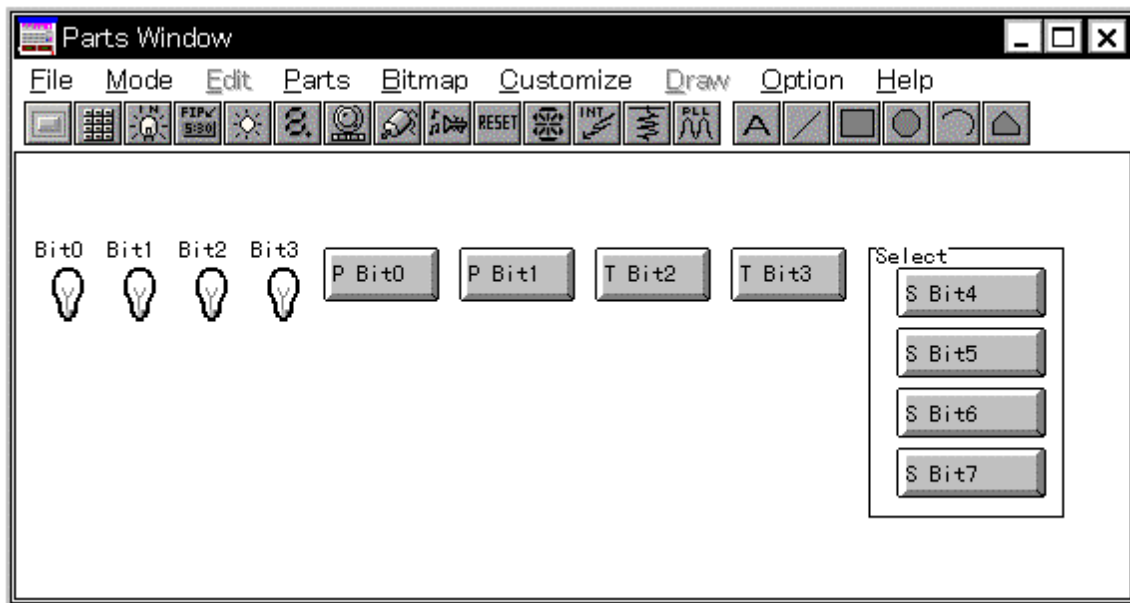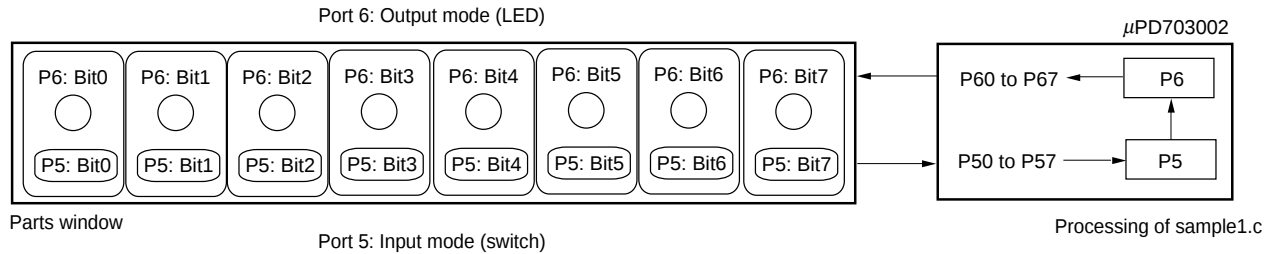

6.1.2 Source examples

<1> Target program (program for V852)

(1/1) SAMPLE1.C

```
#pragma ioreg
main()
{
    MM = 0xB0;
    PM5 = 0xFF;
    PM6 = 0;
    P6 = 0;

    while(1)
    {
        P6 = P5;
    }
}
```

<2> Custom part source file UPsw00.c

(1/3) UPsw00.c

```
/*
 *   User Open I/F   Sample Program      (UPsw00.c)
 *
 *   P50 (I) : Switch 0   P60 (O) : LED 0
 *   P51 (I) : Switch 1   P61 (O) : LED 1
 *   P52 (I) : Switch 2   P62 (O) : LED 2
 *   P53 (I) : Switch 3   P63 (O) : LED 3
 *   P54 (I) : Switch 4   P64 (O) : LED 4
 *   P55 (I) : Switch 5   P65 (O) : LED 5
 *   P56 (I) : Switch 6   P66 (O) : LED 6
 *   P57 (I) : Switch 7   P67 (O) : LED 7
 */

#include    <Windows.h>
#include    <string.h>

typedef unsigned char    UCHAR;
typedef unsigned short    USHORT;
typedef unsigned long    ULONG;

#if 1        /* Specify 0 for 16-bit version */
#include "uparts32.h"
#else
#include "uparts.h"
#endif

#ifdef WIN32
BOOL WINAPI DllMain(HANDLE, DWORD, LPVOID);
#else
BOOL LibMain(HANDLE, WORD, WORD, LPSTR);
int WEP(int);
#endif

void UParts_sw00(void);
```

```
/* ***** */
/*      DLL Main                                */
/* ***** */

#ifdef WIN32

BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    return(TRUE);
}

#else

BOOL LibMain(HANDLE hInstance, WORD wDataSeg, WORD cbHeapSize, LPSTR lpszCmdLine)
{
    if(cbHeapSize > 0) {
        UnlockData(0);
    }
    return(TRUE);
}

#endif

#ifdef WIN32

/* ***** */
/*      WEP                                    */
/* ***** */

int WEP(int nParameter)
{
    switch(nParameter) {
        case WEP_SYSTEM_EXIT:
            break;
        case WEP_FREE_DLL:
            break;
    }
    return(1);
}

#endif
```

```

/*****
/*   UParts_sw00(void)                               */
*****/
void UParts_sw00(void)
{
    static char *pin[4]  = { "P54", "P55", "P56", "P57" };
    static char *name[4] = { "S Bit4", "S Bit5", "S Bit6", "S Bit7" };

    UpSetPBtmtime("3.0");
    UpLed("P60", HIGH, "Bit0", 1);
    UpLed("P61", HIGH, "Bit1", 1);
    UpLed("P62", HIGH, "Bit2", 1);
    UpLed("P63", HIGH, "Bit3", 1);
    UpLed("P64", HIGH, "Bit4", 1);
    UpLed("P65", HIGH, "Bit5", 1);
    UpLed("P66", HIGH, "Bit6", 1);
    UpLed("P67", HIGH, "Bit7", 1);
    UpPushBtm("P50", HIGH, "P Bit0");
    UpPushBtm("P51", HIGH, "P Bit1");
    UpTglBtm("P52", HIGH, "T Bit2");
    UpTglBtm("P53", HIGH, "T Bit3");
    UpSelectBtm("Select", pin, 4, HIGH, name);
}

/* UPsw00.c */

```

<3> Definition file UPsw00.def

(1/1) UPsw00.def

```
LIBRARY          UPSW00

;EXETYPE         WINDOWS 3.1

DESCRIPTION      'User Open I/F Panel sw00'

;STUB            'WINSTUB.EXE'

CODE             PRELOAD MOVEABLE DISCARDABLE
DATA             PRELOAD SINGLE

HEAPSIZE         3072

EXPORTS

;  WEP                                @1
  UParts_sw00                            @2

;IMPORTS
;  SU850.UpSetPBtmtime
;  SU850.UpLed
;  SU850.UpPushBtm
;  SU850.UpTglBtm
;  SU850.UpSelectBtm
```

<4> Make file UPsw00.mak

(1/5) UPsw00.mak

```

# Microsoft Developer Studio Generated NMAKE File, Based on upsw00.dsp
!IF "$(CFG)" == ""
CFG=upsw00 - Win32 Debug
!MESSAGE Configuration not specified. Set default upsw00 - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "upsw00 - Win32 Release" && "$(CFG)" != "upsw00 - Win32 Debug"
!MESSAGE Specified build mode "$(CFG)" is not correct.
!MESSAGE Configuration can be specified during execution of NMAKE.
!MESSAGE Defines command-line macro setting. Example:
!MESSAGE
!MESSAGE NMAKE /f "upsw00.mak" CFG="upsw00 - Win32 Debug"
!MESSAGE
!MESSAGE Selectable build modes:
!MESSAGE
!MESSAGE "upsw00 - Win32 Release" (for "Win32 (x86) Dynamic-Link Library")
!MESSAGE "upsw00 - Win32 Debug" (for "Win32 (x86) Dynamic-Link Library")
!MESSAGE
!ERROR Invalid configuration was specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF

!IF "$(CFG)" == "upsw00 - Win32 Release"

OUTDIR=.\\Release
INTDIR=.\\Release
# Begin Custom Macros
OutDir=.\\Release
# End Custom Macros

ALL : "$(OUTDIR)\\upsw00.dll"

```

```

CLEAN :
    -@erase "$(INTDIR)\Upw00.obj"
    -@erase "$(INTDIR)\vc60.idb"
    -@erase "$(OUTDIR)\upsw00.dll"
    -@erase "$(OUTDIR)\upsw00.exp"
    -@erase "$(OUTDIR)\upsw00.lib"

"$ (OUTDIR) " :
    if not exist "$ (OUTDIR) /$(NULL) " mkdir "$ (OUTDIR) "

CPP=cl.exe
CPP_PROJ=/nologo /Zp1 /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /D "_MBCS"
/D "_USRDLL" /D "UPSW00_EXPORTS" /Fp"$ (INTDIR)\upsw00.pch" /YX /Fo"$ (INTDIR) \\" /Fd"
$(INTDIR) \\" /FD /c

.c{$ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cpp{$ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{$ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.c{$ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cpp{$ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{$ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

```

```

MTL=midl.exe
MTL_PROJ=/nologo /D "NDEBUG" /mktyplib203 /win32
RSC=rc.exe
BSC32=bscmake.exe
BSC32_FLAGS=/nologo /o"$(OUTDIR)\upsw00.bsc"
BSC32_SBRS= \

LINK32=link.exe
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /dll /in
cremental:no /pdb:"$(OUTDIR)\upsw00.pdb" /machine:I386 /def:".\\Upw00.def" /out:"$(OU
TDIR)\upsw00.dll" /implib:"$(OUTDIR)\upsw00.lib"
DEF_FILE= \
    ".\\Upw00.def"
LINK32_OBJS= \
    "$(INTDIR)\Upw00.obj" \
    ".\\si85032.lib"

"$ (OUTDIR)\upsw00.dll" : "$ (OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "upsw00 - Win32 Debug"

OUTDIR=.\\Debug
INTDIR=.\\Debug
# Begin Custom Macros
OutDir=.\\Debug
# End Custom Macros

ALL : "$(OUTDIR)\upsw00.dll"

CLEAN :
    -@erase "$(INTDIR)\Upw00.obj"
    -@erase "$(INTDIR)\vc60.idb"
    -@erase "$(INTDIR)\vc60.pdb"
    -@erase "$(OUTDIR)\upsw00.dll"
    -@erase "$(OUTDIR)\upsw00.exp"
    -@erase "$(OUTDIR)\upsw00.ilc"
    -@erase "$(OUTDIR)\upsw00.lib"
    -@erase "$(OUTDIR)\upsw00.pdb"

```

```

"$ (OUTDIR) " :
    if not exist "$ (OUTDIR) /$ (NULL) " mkdir "$ (OUTDIR) "

CPP=cl.exe
CPP_PROJ=/nologo /Gd /Zp1 /MTd /W3 /Gm /GX /Zi /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/D "_MBCS" /D "_USRDLL" /D "UPSW00_EXPORTS" /Fp"$ (INTDIR) \upsw00.pch" /YX /Fo"$ (INT
DIR) \\" /Fd"$ (INTDIR) \\" /FD /c

.c{ $ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cpp{ $ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{ $ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.c{ $ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cpp{ $ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{ $ (INTDIR) }.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

MTL=midl.exe
MTL_PROJ=/nologo /D "_DEBUG" /mktyplib203 /win32
RSC=rc.exe
BSC32=bscmake.exe
BSC32_FLAGS=/nologo /o"$ (OUTDIR) \upsw00.bsc"
BSC32_SBRs= \

```

```

LINK32=link.exe
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /dll /in
cremental:yes /pdb:"$(OUTDIR)\upsw00.pdb" /debug /machine:I386 /def:".\\Upsw00.def" /o
ut:"$(OUTDIR)\upsw00.dll" /implib:"$(OUTDIR)\upsw00.lib" /pdbtype:sept
DEF_FILE= \
    ".\\Upsw00.def"
LINK32_OBJS= \
    "$(INTDIR)\Upsw00.obj" \
    ".\\si85032.lib"

"$(OUTDIR)\upsw00.dll" : "$(OUTDIR)" $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

!IF "$(NO_EXTERNAL_DEPS)" != "1"
!IF EXISTS("upsw00.dep")
!INCLUDE "upsw00.dep"

!ELSE
!MESSAGE Warning: cannot find "upsw00.dep"
!ENDIF
!ENDIF

!IF "$(CFG)" == "upsw00 - Win32 Release" || "$(CFG)" == "upsw00 - Win32 Debug"
SOURCE=.\\Upsw00.c

"$(INTDIR)\Upsw00.obj" : $(SOURCE) "$(INTDIR)"

!ENDIF

```

6.2 Example of Parts Customized via User Window

6.2.1 Description of samples


The items displayed in the user custom window include a part that sets a value to the AD input pin and a part that captures values from the DA output pin.

Pressing the ANI0 button in the user custom window causes the analog value input to analog input pin ANI0 to be incremented by 10. When the AD value reaches 250, it is cleared to zero.

The analog value from ANI0 undergoes AD conversion and the resulting digital value is then DA converted and output to ANO0 as an analog value. The display of "DA Value = XXXX" is updated to the current value when the ANO0 button in the user custom window is pressed.

An example is shown below.

Figure 6-2. Example of Parts Customized via User Window

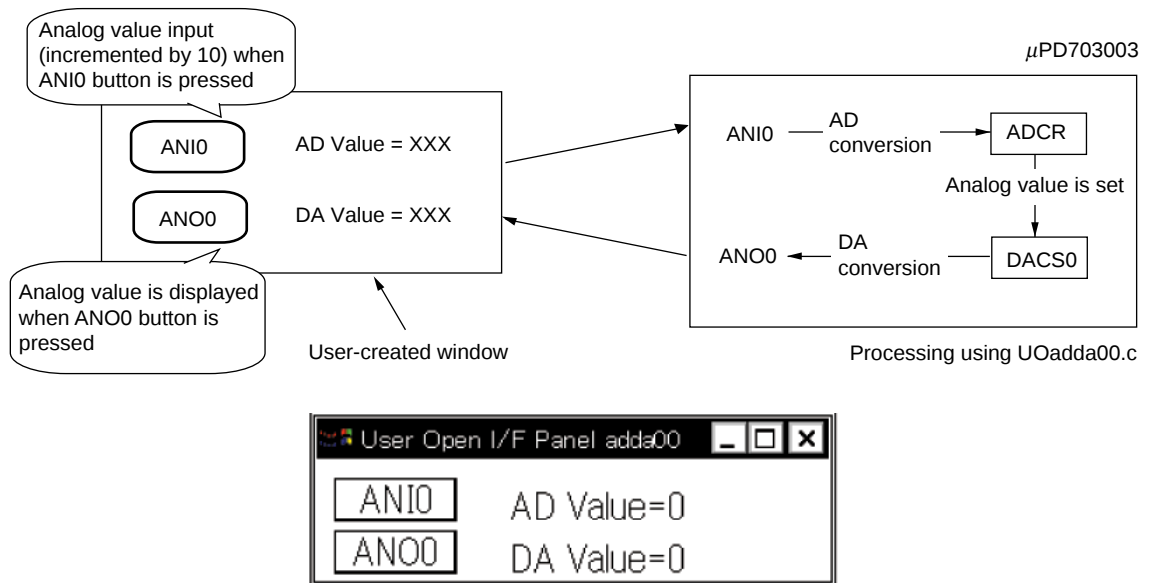

6.2.2 Source examples

<1> Target program (program for V853)

(1/1) SAMPLE2.C

```
#pragma ioreg
#pragma          interrupt INTADfunc1
__interrupt void func1(void);

__interrupt void func1(void)
{
    __DI();
    DACS0 = (char)ADCRO;
    ADM0 = 0x90;
    __EI();
    return;
}

main()
{
    ADM1 = 0x07;
    ADM0 = 0x90;
    DAM = 0x01;
    ADIC = 0x02;
    __EI();
    while(1)
    {
    }
}
```

<2> Custom part source file UOadda00.c

(1/8) UOadda00.c

```
/*
 *   User Open I/F   Sample Program      (UOadda00.c)
 */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

typedef unsigned char   UCHAR;
typedef unsigned short  USHORT;
typedef unsigned long   ULONG;

#ifdef WIN32
#include <Windows.h>
#else
#include <Windowsx.h>
#endif

#if 1      /* Specify 0 for 16-bit version */
#include "uparts32.h"
#else
#include "uparts.h"
#endif

#define IDM_PAST          0x1111
#define IDM_NEWWIN        0x1112
#define BTN_WIDTH         70
#define BTN_HIGHT         25
#define IDD_PIN_BUTTON    0x10

#ifdef WIN32
BOOL APIENTRY DllMain(HANDLE, DWORD, LPVOID);
#else
BOOL LibMain(HANDLE, WORD, WORD, LPSTR);
int WEP(int);
#endif

void UParts_adda00(void);
LONG UParts_adda00WndProc(HWND, unsigned, WORD, LONG);
void UParts_adda00Call(ULONG);
void UParts_adda00Reset(void);
void UParts_adda00LoadProj(char *);
void UParts_adda00SaveProj(char *);
```

```

/* Window point */
#define UParts_adda00WIDTH      300
#define UParts_adda00HEIGHT     100

/* Title Strings */
#define STR_UP_TITLE "User Open I/F Panel adda00"

/* Window Class Name */
const BYTE      cnUParts_adda00[] = "UParts_adda00Win";

HANDLE hInst;
HWND    hUParts_adda00Wnd;
HWND    btm_hwnd[2];
char     *strbuf[2] = {"ANI0", "ANO0"};
USHORT  adval = 0;
USHORT  daval = 0;
char     UParts_Veiw_str[7];
char     UParts_Rect_str[23];

#ifdef WIN32
/*****
/*      DLL Main
*****/
BOOL APIENTRY DllMain(HANDLE hModule, DWORD ul_reason_for_call, LPVOID lpReserved)
{
    WNDCLASS      wndclass;

    switch(ul_reason_for_call){
        case DLL_PROCESS_ATTACH:
            hInst = hModule;
            wndclass.lpszClassName = (LPSTR)cnUParts_adda00;
            wndclass.hInstance     = hInst;
            wndclass.lpfnWndProc   = (WNDPROC)UParts_adda00WndProc;
            wndclass.hCursor       = NULL;
            wndclass.hIcon         = NULL;
            wndclass.lpszMenuName  = NULL;
            wndclass.hbrBackground = (HBRUSH)(COLOR_WINDOW + 1);
            wndclass.style         = CS_HREDRAW | CS_VREDRAW;
            wndclass.cbClsExtra    = 0;
            wndclass.cbWndExtra    = DLGWINDOWEXTRA;
            RegisterClass(&wndclass);
            break;
    }
}

```

```

        case DLL_THREAD_ATTACH:
            break;
        case DLL_THREAD_DETACH:
            break;
        case DLL_PROCESS_DETACH:
            break;
    }
    return(TRUE);
}
#else

BOOL LibMain(HANDLE hInstance, WORD wDataSeg, WORD cbHeapSize, LPSTR lpszCmdLine)
{
    WNDCLASS    wndclass;

    if(cbHeapSize > 0) {
        UnlockData(0);
        UnlockSegment(wDataSeg);
    }

    wndclass.lpszClassName = (LPSTR)cnUParts_adda00;
    wndclass.hInstance     = hInstance;
    wndclass.lpfnWndProc    = (WNDPROC)UParts_adda00WndProc;
    wndclass.hCursor        = NULL;
    wndclass.hIcon          = NULL;
    wndclass.lpszMenuName   = NULL;
    wndclass.hbrBackground = COLOR_WINDOW + 1;
    wndclass.style          = CS_HREDRAW | CS_VREDRAW;
    wndclass.cbClsExtra     = 0;
    wndclass.cbWndExtra     = 0;
    RegisterClass(&wndclass);
    hInst = hInstance;
    return(TRUE);
}
#endif

#ifdef WIN32
/*****
/*      WEP
*****/
int WEP(int nParameter)
{

```

```

        switch(nParameter) {
            case WEP_SYSTEM_EXIT:
                break;
            case WEP_FREE_DLL:
                break;
        }
        return(1);
    }
#endif

/*****
/*   UParts_adda00(void)
*****/
void UParts_adda00(void)
{
    if(!hUParts_adda00Wnd){
        hUParts_adda00Wnd = CreateWindow((LPSTR)cnUParts_adda00, /* Class name */
            STR_UP_TITLE, /* Title. */
            WS_OVERLAPPEDWINDOW | WS_BORDER | WS_VISIBLE, /* Style bits. */
            CW_USEDEFAULT, /* x - default.*/
            CW_USEDEFAULT, /* y - default. */
            UParts_adda00WIDTH, /* cx - default.*/
            UParts_adda00HEIGHT, /* cy - default.*/
            NULL, /* No parent.*/
            NULL, /* Class memu.*/
            hInst, /* Creator */
            NULL); /* Params. */
    }
    if(hUParts_adda00Wnd){
        UpSetUserWnd(hUParts_adda00Wnd);
        ShowWindow(hUParts_adda00Wnd, SW_SHOW);
        UpCallFuncName((char *)"UParts_adda00Call");
        UpResetFuncName((char *)"UParts_adda00Reset");
        UpLoadProjName((char *)"UParts_adda00LoadProj");
        UpSaveProjName((char *)"UParts_adda00SaveProj");
        UpInitAD("ANI0");
        UpInitAD("ANI1");
    }
    return;
}

```

```

/*****
/*      UParts_adda00WndProc(HWND, unsigned WORD, LONG)      */
*****/
LONG UParts_adda00WndProc(HWND hWnd, unsigned iMessage, WORD wParam, LONG lParam)
{
    HDC          hDC;
    PAINTSTRUCT ps;
    RECT         wRect;
    int          i;
    char         strval[20];

#ifdef WIN32
    long         wx,wy;
#else
    WORD         wx, wy;
#endif

    switch(iMessage){
        case WM_CREATE:
            for(i = 0; i < 2; i++){

#ifdef WIN32

                btm_hwnd[i] = CreateWindow((LPSTR)"button",strbuf[i],
                    WS_CHILD|BS_PUSHBUTTON|WS_VISIBLE|WS_TABSTOP,
                    10, 10+30*i, BTN_WIDTH,BTN_HIGHT, hWnd,
                    HMENU)(IDD_PIN_BUTTON+i),hInst,NULL);
#else

                btm_hwnd[i] = CreateWindow((LPSTR)"button", strbuf[i],
                    WS_CHILD | BS_PUSHBUTTON | WS_VISIBLE | WS_TABSTOP,
                    10, 10+30*i, BTN_WIDTH, BTN_HIGHT, hWnd,
                    IDD_PIN_BUTTON + i, hInst, NULL);
#endif

            }
    }
    return(FALSE);
}

```

```
case WM_COMMAND:
    switch(wParam) {
        case IDD_PIN_BUTTON:
            if(adval <= 245)
                adval += 10;
            else
                adval = 0;
            UpSetAD("ANI0", adval);
            InvalidateRect(hWnd, NULL, TRUE);
            UpdateWindow(hWnd);
            break;
        case IDD_PIN_BUTTON + 1:
            UpGetDA("ANO0", &daval);
            InvalidateRect(hWnd, NULL, TRUE);
            UpdateWindow(hWnd);
            break;
    }
    return(FALSE);

case WM_PAINT:
    hDC = BeginPaint(hWnd, &ps);
    wsprintf(strval, "AD Value=%u\0", adval);
    TextOut(hDC, BTN_WIDTH + 40, 15, strval, lstrlen(strval));
    wsprintf(strval, "DA Value=%u\0", daval);
    TextOut(hDC, BTN_WIDTH + 40, 45, strval, lstrlen(strval));
    EndPaint(hWnd, &ps);
    return(FALSE);

case WM_SYSCOLORCHANGE:
    InvalidateRect(hWnd, NULL, TRUE);
    break;

case WM_MOVE:
    GetWindowRect(hWnd, &wRect);
    wx = wRect.right - wRect.left;
    wy = wRect.bottom - wRect.top;

    if((wx != 36) && (wy != 36)) {
        wsprintf(UParts_Rect_str, "%d, %d, %d, %d", wRect.left,
            wRect.top, wx, wy);
    }
    InvalidateRect(hWnd, NULL, TRUE);
    break;
```

```

    case WM_SIZE:
        if(wParam == SIZE_ICONIC) {
            lstrcpy(UParts_Veiw_str, "Icon");
        } else {
            GetWindowRect(hWnd, &wRect);
            lstrcpy(UParts_Veiw_str, "Normal");
            wsprintf(UParts_Rect_str, "%d, %d, %d, %d", wRect.left, wRect.top,
                wRect.right - wRect.left, wRect.bottom - wRect.top);
        }
        break;

    case WM_DESTROY:
        UpCloseUserWnd(hWnd);

    default:
        return DefWindowProc(hWnd, iMessage, wParam, lParam);
    }
    return 0L;
}

/*****
/*      UParts_adda00Call (ULONG)
*****/
void UParts_adda00Call (ULONG time)
{
    return;
}

/*****
/*      UParts_adda00Reset (void)
*****/
void UParts_adda00Reset (void)
{
    adval = 0;
    daval = 0;
    InvalidateRect(hUParts_adda00Wnd, NULL, TRUE);
}

```

```

/*****
/*  UParts_adda00LoadProj(char *)
/*
/*****
void UParts_adda00LoadProj(char *fname)
{
    char    *next;
    WORD    x, y, wx, wy;

    GetPrivateProfileString("UOadda00", "Window", "Hide", UParts_Veiw_str, 7, fname);
    if(!lstrcmp(UParts_Veiw_str, "Icon")){ /* "Icon" mode */
        ShowWindow(hUParts_adda00Wnd, SW_SHOWMINNOACTIVE);
    }
    else { /* "Normal" mode */
        GetPrivateProfileString("UOadda00", "Geometry", "0, 0, 0, 0",
            UParts_Rect_str, 23, fname);
        if(lstrcmp(UParts_Rect_str, "0, 0, 0, 0")) {
            next = strtok(UParts_Rect_str, ",");
            x = (WORD)strtoul(next, NULL, 10);
            next = strtok(NULL, ",");
            y = (WORD)strtoul(next, NULL, 10);
            next = strtok(NULL, ",");
            wx = (WORD)strtoul(next, NULL, 10);
            next = strtok(NULL, ",");
            wy = (WORD)strtoul(next, NULL, 10);
            MoveWindow(hUParts_adda00Wnd, x, y, wx, wy, TRUE);
        }
        ShowWindow(hUParts_adda00Wnd, SW_SHOWNORMAL);
    }
}

/*****
/*  UParts_adda00SaveProj(char *)
/*
/*****
void UParts_adda00SaveProj(char *fname)
{
    WritePrivateProfileString("UOadda00", "Window", UParts_Veiw_str, fname);
    WritePrivateProfileString("UOadda00", "Geometry", UParts_Rect_str, fname);
}

/* UOadda00.c */

```

<3> Definition file UOadda00.def

(1/1) UOadda00.def

```

LIBRARY          UOADDA00

;EXETYPE          WINDOWS 3.1

DESCRIPTION 'User Open I/F Panel adda00'

;STUB             'WINSTUB.EXE'

CODE              PRELOAD MOVEABLE DISCARDABLE
DATA              PRELOAD MOVEABLE SINGLE

HEAPSIZE          4096

EXPORTS

;                WEP                                @1
                UParts_adda00                        @2
                UParts_adda00WndProc                  @3
                UParts_adda00Call                      @4
                UParts_adda00Reset                     @5
                UParts_adda00LoadProj                   @6
                UParts_adda00SaveProj                   @7

;IMPORTS          SU78K0.UpSetUserWnd
;                SU850.UpCloseUserWnd
;                SU850.UpCallFuncName
;                SU850.UpResetFuncName
;                SU850.UpLoadProjName
;                SU850.UpSaveProjName
;                SU850.UpInitAD
;                SU850.UpSetAD
;                SU850.UpGetDA

```

<4> Make file UOadda00.mak

(1/4) UOadda00.mak

```

# Microsoft Developer Studio Generated NMAKE File, Based on uoadda00.dsp
!IF "$(CFG)" == ""
CFG=uoadda00 - Win32 Debug
!MESSAGE Configuration not specified. Set default uoadda00 - Win32 Debug.
!ENDIF

!IF "$(CFG)" != "uoadda00 - Win32 Release" && "$(CFG)" != "uoadda00 - Win32 Debug"
!MESSAGE Specified build mode "$(CFG)" is not correct.
!MESSAGE Configuration can be specified during execution of NMAKE.
!MESSAGE Defines command-line macro setting. Example:
!MESSAGE
!MESSAGE NMAKE /f "uoadda00.mak" CFG="uoadda00 - Win32 Debug"
!MESSAGE
!MESSAGE Selectable build modes:
!MESSAGE
!MESSAGE "uoadda00 - Win32 Release" (for "Win32 (x86) Dynamic-Link Library")
!MESSAGE "uoadda00 - Win32 Debug" (for "Win32 (x86) Dynamic-Link Library")
!MESSAGE
!ERROR Invalid configuration was specified.
!ENDIF

!IF "$(OS)" == "Windows_NT"
NULL=
!ELSE
NULL=nul
!ENDIF

CPP=cl.exe
MTL=midl.exe
RSC=rc.exe

!IF "$(CFG)" == "uoadda00 - Win32 Release"

OUTDIR=.\Release
INTDIR=.\Release
# Begin Custom Macros

OutDir=.\Release
# End Custom Macros

ALL : "$(OUTDIR)\uoadda00.dll"

```

```

CLEAN :
    -@erase "$(INTDIR)\Uoadda00.obj"
    -@erase "$(INTDIR)\vc60.idb"
    -@erase "$(OUTDIR)\uoadda00.dll"
    -@erase "$(OUTDIR)\uoadda00.exp"
    -@erase "$(OUTDIR)\uoadda00.lib"

"$ (OUTDIR) " :
    if not exist "$(OUTDIR)/$(NULL)" mkdir "$(OUTDIR) "

CPP_PROJ=/nologo /Zp1 /MT /W3 /GX /O2 /D "WIN32" /D "NDEBUG" /D "_WINDOWS" /D "_MBCS"
    /D "_USRDLL" /D "UOADDA00_EXPORTS" /Fp"$(INTDIR)\uoadda00.pch" /YX /Fo"$(INTDIR)\\"
    /Fd"$(INTDIR)\\" /FD /c
MTL_PROJ=/nologo /D "NDEBUG" /mktyplib203 /win32
BSC32=bscmake.exe
BSC32_FLAGS=/nologo /o"$(OUTDIR)\uoadda00.bsc"
BSC32_SBRs= \

LINK32=link.exe
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib
    shell32.lib ole32.lib oleaut32.lib uuid.lib odbcc32.lib /nologo /dll /in
    cremental:no /pdb:"$(OUTDIR)\uoadda00.pdb" /machine:I386 /def:".\\Uoadda00.def" /out:"
    $(OUTDIR)\uoadda00.dll" /implib:"$(OUTDIR)\uoadda00.lib"
DEF_FILE= \
    ".\\Uoadda00.def"
LINK32_OBJS= \
    "$(INTDIR)\Uoadda00.obj" \
    ".\\si85032.lib"

"$ (OUTDIR)\uoadda00.dll" : "$ (OUTDIR) " $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ELSEIF "$(CFG)" == "uoadda00 - Win32 Debug"

OUTDIR=.\\Debug
INTDIR=.\\Debug
# Begin Custom Macros
OutDir=.\\Debug
# End Custom Macros

ALL : "$(OUTDIR)\uoadda00.dll"

```

```

CLEAN :
    -@erase "$(INTDIR)\Uoadda00.obj"
    -@erase "$(INTDIR)\vc60.idb"
    -@erase "$(INTDIR)\vc60.pdb"
    -@erase "$(OUTDIR)\uoadda00.dll"
    -@erase "$(OUTDIR)\uoadda00.exp"
    -@erase "$(OUTDIR)\uoadda00.ilc"
    -@erase "$(OUTDIR)\uoadda00.lib"
    -@erase "$(OUTDIR)\uoadda00.pdb"

"$ (OUTDIR) " :
    if not exist "$ (OUTDIR)/$(NULL)" mkdir "$ (OUTDIR) "

CPP_PROJ=/nologo /Zp1 /MTd /W3 /Gm /GX /ZI /Od /D "WIN32" /D "_DEBUG" /D "_WINDOWS"
/D "_MBCS" /D "_USRDLL" /D "UOADD00_EXPORTS" /Fp"$ (INTDIR)\uoadda00.pch" /YX /Fo"$ (INT
DIR)\\" /Fd"$ (INTDIR)\\" /FD /GZ /c
MTL_PROJ=/nologo /D "_DEBUG" /mktyplib203 /win32
BSC32=bscmake.exe
BSC32_FLAGS=/nologo /o"$ (OUTDIR)\uoadda00.bsc"
BSC32_SBRs= \
LINK32=link.exe
LINK32_FLAGS=kernel32.lib user32.lib gdi32.lib winspool.lib comdlg32.lib advapi32.lib
shell32.lib ole32.lib oleaut32.lib uuid.lib odbc32.lib odbccp32.lib /nologo /dll /in
cremental:yes /pdb:"$ (OUTDIR)\uoadda00.pdb" /debug /machine:I386 /def:". \Uoadda00.def
" /out:"$ (OUTDIR)\uoadda00.dll" /implib:"$ (OUTDIR)\uoadda00.lib" /pdbtype:sept
DEF_FILE= \
    ". \Uoadda00.def"

LINK32_OBJS= \
    "$ (INTDIR)\Uoadda00.obj" \
    ". \si85032.lib"

"$ (OUTDIR)\uoadda00.dll" : "$ (OUTDIR) " $(DEF_FILE) $(LINK32_OBJS)
    $(LINK32) @<<
    $(LINK32_FLAGS) $(LINK32_OBJS)
<<

!ENDIF

.c{$ (INTDIR) }.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

```

```

.cpp{$(INTDIR)}.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{$(INTDIR)}.obj::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.c{$(INTDIR)}.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cpp{$(INTDIR)}.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

.cxx{$(INTDIR)}.sbr::
    $(CPP) @<<
    $(CPP_PROJ) $<
<<

!IF "$(NO_EXTERNAL_DEPS)" != "1"
!IF EXISTS("uoadda00.dep")
!INCLUDE "uoadda00.dep"
!ELSE
!MESSAGE Warning: cannot find "uoadda00.dep"
!ENDIF
!ENDIF

!IF "$(CFG)" == "uoadda00 - Win32 Release" || "$(CFG)" == "uoadda00 - Win32 Debug"
SOURCE=.\Uoadda00.c

"$(INTDIR)\Uoadda00.obj" : $(SOURCE) "$(INTDIR)"

!ENDIF

```

APPENDIX A ERROR MESSAGES

A.1 Error Processing

- (a) If the specified pin name is not among the products that can be simulated, the Error Message dialog box appears to report an error message.
- (b) If the read DLL file is a combination of user panel custom functions and Parts custom functions, a dialog box appears with a warning message when the first function to be read does not belong to the DLL file in accordance with the DLL file name.
- (c) If an error occurs when a user-created custom DLL is read, the part that caused the error is not created.
- (d) If an error or warning occurs even once for the user panel custom functions UpGetPin(), UpGetPort(), UpGetMem(), UpClrMtrAcClk(), or UpGetStpingMtr(), error values may be returned or the function may not operate correctly during subsequent uses of the function. Therefore, if an error or warning occurs, revise the source code, create the DLL file again, and reload to avoid such problems.

A.2 Error and Warning Messages

Error messages and warning messages that may occur during execution of a function are listed below. The abbreviated function names listed below are used to refer to the function names for which the error occurred.

Table A-1. The Function Names For Which The Error Occurred

Stepping motor functions	UpStpingMtr(), UpSetStpingMtr(), UpGetStpingMtr()
LED picture setup function	UpSetLedPic()
LED functions	UpLed(), UpPortLed()
Matrix LED function	UpMtxLed()
Serial pin data input function	UpSerial_data()
Port value setup/capture functions	UpPortLed(), UpGetPort(), UpSetPort()
Hold time setup function	UpSetPBtmtime()
Vertical scroll bar analog input function	UpScaleInterAD()
Reference voltage value setup function	UpSetAVref()
Function name notification functions	UpCallFuncName(), UpLoadProjName(), UpSaveProjName(), UpResetFuncName()
Bitmap setup functions	UpSetBtmBmp(), UpSetLedBmp(), UpSetMtrBmp()
Button functions	UpPushBtm(), UpTglBmp(), UpSelectBtm()

A. 2. 1 Error Messages

With the simulator, when an error is detected, a message is output to the error dialog box and the processing is stopped.

E10100:	The selected pin name does not exist.
Cause	The set pin does not exist.
User Action	Set a pin name that exists on the target device.
Function	All functions that include a pin name parameter
E10101:	The pin name is a 2-byte name.
Cause	The set pin name is described with 2-byte characters.
User Action	Describe the pin name with 1-byte characters.
Function	All functions that include a pin name parameter
E10103:	Hold time is invalid.
Cause	Retention time is not set within the settable range or is not a numerical value.
User Action	Set the retention time within the range 999msec to 0.001msec.
Function	Hold time setup function
E10107:	AVref is above/under operating voltage range.
Cause	AVref is not within the range of operating voltage.
User Action	Set it within the range of operating voltage.
Function	Reference voltage value setup function
E1010c:	The selected bit map file is invalid.
Cause	A bitmap file specified in the bitmap entry dialog box is incorrect.
User Action	Set a bitmap format file.
Function	Bitmap setup functions
E10124:	The selected pin name is already set.
Cause	An attempt was made to re-set a pin that had already been set in the buttons dialog box.
User Action	Do not set a pin that has been already set.
Function	Button functions
E10139:	Allocation error.
Cause	Memory could not be secured.
User Action	Close other applications and secure memory.
Function	All functions
E10200:	The active H/L is not HIGH or LOW.
Cause	The described active H/L is a value other than HIGH or LOW.
User Action	Describe HIGH or LOW in the active H/L.
Function	All functions that include an active high/low parameter
E10201:	The channel number is not 4 or 8.
Cause	The described number of the channels is a value other than 4 or 8.
User Action	Describe 4 or 8 for the number of the channels according to the number of the pins.
Function	Stepping motor functions that include a minimum step angle parameter

E10202:	The phase is not 0 or 1.
Cause	The described excitation value is a value other than 0 or 1.
User Action	Describe 0 or 1 for excitation according to the excitation method.
Function	Stepping motor functions that include a minimum step angle parameter
E10203:	The minimum step angle does not divide to 360.
Cause	The described minimum step angle is a value that cannot divide 360 evenly.
User Action	Describe an integer value that can divide 360 evenly for the minimum step angle.
Function	Stepping motor functions that include a number-of-channels parameter
E10204:	The picture type is not PIC_RECT or PIC_ELL.
Cause	The described value for the type of figure in the parameter is a value other than macro PIC_RECT or PIC_ELL.
User Action	Describe PIC_RECT or PIC_ELL for the type of figures.
Function	LED picture setup function
E10205:	The color type is not PIC_RED or PIC_YELLOW or PIC_GREEN.
Cause	The described value for the type of color in the parameter is a value other than macro PIC_RED, PIC_YELLOW, or PIC_GREEN.
User Action	Describe one of PIC_RED, PIC_YELLOW, or PIC_GREEN for the type of color.
Function	LED picture setup function
E10206:	The view type is not 0 or 1.
Cause	The described value of the figure style is a value other than 0 or 1.
User Action	Describe 0 or 1 for the parameter figure style.
Function	LED functions that include a picture type parameter
E10207:	The first bit of serial input data is not MSB or LSB.
Cause	The described value of the figure style is a value other than 0 or 1.
User Action	Describe 1 or 0 for the first bit of the parameter.
Function	Serial pin data input function
E10208:	The active H/L of output1 is not HIGH or LOW.
Cause	The described value of the active H/L of output 1 for the parameter is a value other than HIGH or LOW.
User Action	Describe HIGH or LOW for the active H/L of output 1 for the parameter.
Function	Matrix LED function
E10209:	The active H/L of output2 is not HIGH or LOW.
Cause	The described value of the active H/L of output 2 for the parameter is a value other than HIGH or LOW.
User Action	Describe HIGH or LOW for the active H/L of output 2 for the parameter.
Function	Matrix LED function
E1020a:	The port name is a 2-byte name.
Cause	The port name of the parameter is described with 2-byte characters.
User Action	Describe the port name of the parameter with 1-byte characters.
Function	Port value setup/capture functions
E1020b:	The selected port name does not exist.
Cause	A nonexistent port name is described as the port name of the parameter.
User Action	Describe a port name existing on a target device.
Function	Port value setup/capture functions

E1020c:	The parameter is NULL pointer.
Cause	An incorrect parameter is described in a function.
User Action	Describe a correct parameter.
Function	All functions that include a pointer type parameter
E1020d:	The function xxxx can not set in UOxxx.dll.
Cause	This function was described in UOxxx.dll.
User Action	Use it in UPxxx.dll.
Function	All functions described in section 4.1
E1020e:	The function xxxx can not set in UPxxx.dll.
Cause	This function was described in UPxxx.dll.
User Action	Use it in UOxxx.dll.
Function	All functions described in section 4.2
E1020f:	The function xxxx does not set previous.
Cause	A necessary notification function was not notified previously.
User Action	Call the necessary notification function previously.
Function	Functions requiring advance notification function

A. 2. 2 Warning Messages

With the simulator, when a warning is detected, a message is output to the warning dialog box and the processing is continued.

W10180:	Hold time is not set.
Cause	Hold time is set to 0.5 msec.
User Action	Hold time is not set.
Function	Set the hold time.
	Hold time setup function
W10181:	AVref is not set. AVref is set 5.0v,continue?
Cause	AVref is not set.
User Action	Set AVref.
Function	Reference voltage value setup function
W10280:	Data cannot be input from external devices during backtrace execution.
Cause	Data input during back-trace is prohibited.
User Action	Do not input data while executing back-trace.
Function	Vertical scroll bar analog input function

[MEMO]

Facsimile Message

From:

Name

Company

Tel.

FAX

Address

Although NEC has taken all possible steps to ensure that the documentation supplied to our customers is complete, bug free and up-to-date, we readily accept that errors may occur. Despite all the care and precautions we've taken, you may encounter problems in the documentation. Please complete this form whenever you'd like to report errors or suggest improvements to us.

Thank you for your kind support.

North America

NEC Electronics Inc.
Corporate Communications Dept.
Fax: +1-800-729-9288
+1-408-588-6130

Hong Kong, Philippines, Oceania

NEC Electronics Hong Kong Ltd.
Fax: +852-2886-9022/9044

Asian Nations except Philippines

NEC Electronics Singapore Pte. Ltd.
Fax: +65-250-3583

Europe

NEC Electronics (Europe) GmbH
Technical Documentation Dept.
Fax: +49-211-6503-274

Korea

NEC Electronics Hong Kong Ltd.
Seoul Branch
Fax: +82-2-528-4411

Japan

NEC Semiconductor Technical Hotline
Fax: +81- 44-435-9608

South America

NEC do Brasil S.A.
Fax: +55-11-6462-6829

Taiwan

NEC Electronics Taiwan Ltd.
Fax: +886-2-2719-5951

I would like to report the following error/make the following suggestion:

Document title: _____

Document number: _____ Page number: _____

If possible, please fax the referenced page or drawing.

Document Rating	Excellent	Good	Acceptable	Poor
Clarity	☐	☐	☐	☐
Technical Accuracy	☐	☐	☐	☐
Organization	☐	☐	☐	☐