

HIGH-FREQUENCY LOW NOISE AMPLIFIER
NPN SILICON EPITAXIAL TRANSISTOR
(WITH BUILT-IN 2 ELEMENTS) MINI MOLD

The μ PA802T has built-in 2 low-voltage transistors which are designed to amplify low noise in the VHF band to the UHF band.

FEATURES

- Low Noise
NF = 1.4 dB TYP. @ f = 1 GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- High Gain
 $|S_{21e}|^2 = 12$ dB TYP. @ f = 1 GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- A Mini Mold Package Adopted
- Built-in 2 Transistors ($2 \times 2SC4227$)

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
μ PA802T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q2 Base), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μ PA802T-T1	Taping products (3 KPCS/Reel)	

Remark If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)

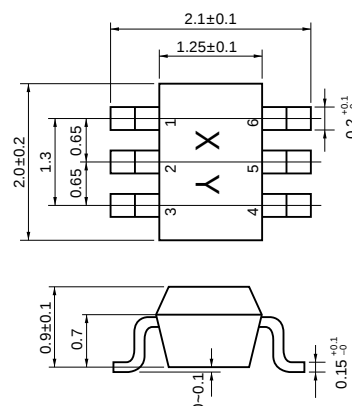
ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	10	V
Emitter to Base Voltage	V_{EBO}	1.5	V
Collector Current	I_C	65	mA
Total Power Dissipation	P_T	150 in 1 element 200 in 2 elements ^{Note}	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^\circ\text{C}$


Note 110 mW must not be exceeded in 1 element.

PACKAGE DRAWINGS

(Unit: mm)



PIN CONFIGURATION (Top View)



PIN CONNECTIONS

1. Collector (Q1)
2. Emitter (Q1)
3. Collector (Q2)
4. Emitter (Q2)
5. Base (Q2)
6. Base (Q1)

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

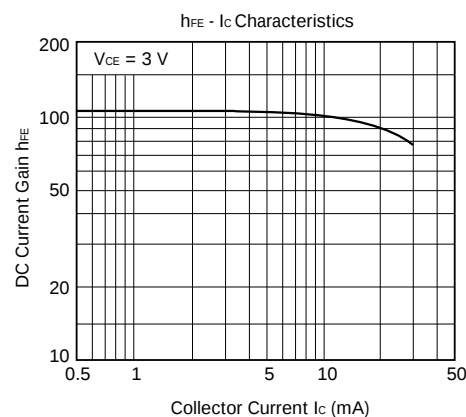
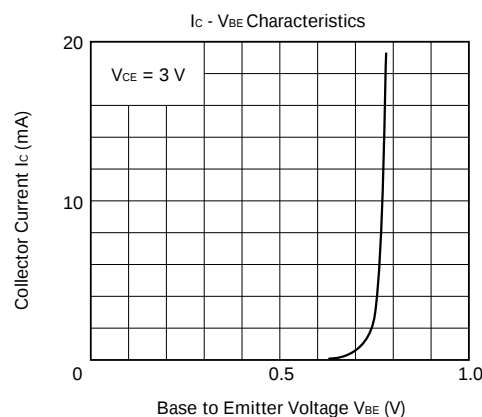
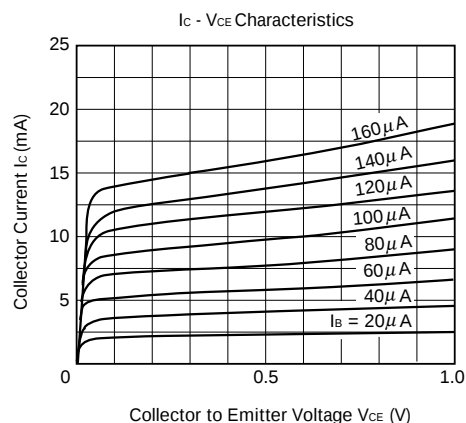
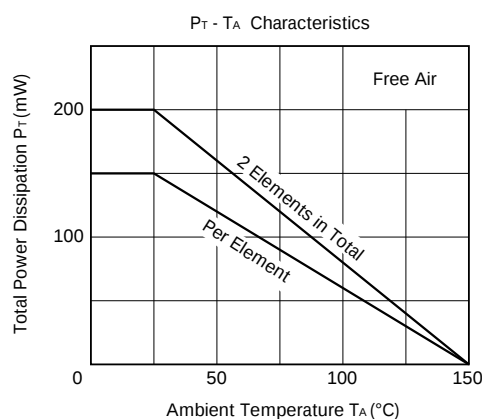
PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{ V}, I_E = 0$			0.8	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{ V}, I_C = 0$			0.8	μA
DC Current Gain	h_{FE}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ Note 1	70		240	
Gain Bandwidth Product	f_T	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$	4.5	7.0		GHz
Feed-back Capacitance	C_{re}	$V_{CB} = 3\text{ V}, I_E = 0, f = 1\text{ MHz}$ Note 2			0.9	pF
Insertion Power Gain	$ S_{21} ^2$	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$	10	12		dB
Noise Figure	NF	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$		1.4	1.7	dB
h_{FE} Ratio	h_{FE1}/h_{FE2}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ A smaller value among h_{FE} of $h_{FE1} = Q1, Q2$ A larger value among h_{FE} of $h_{FE2} = Q1, Q2$	0.85			

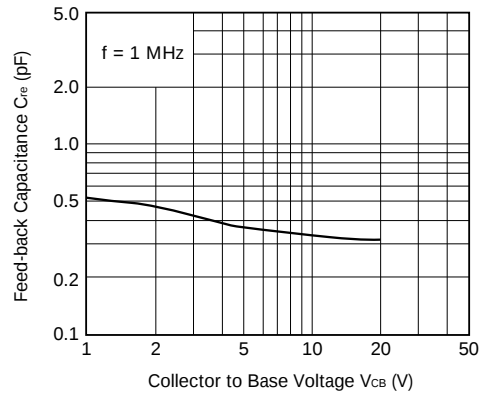
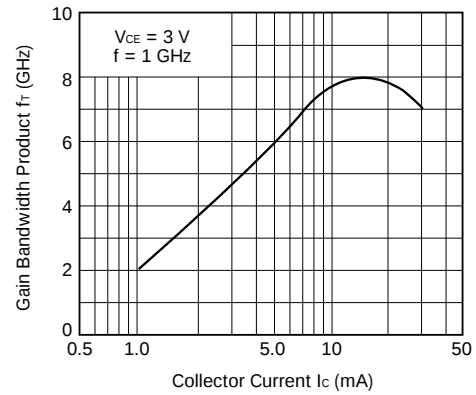
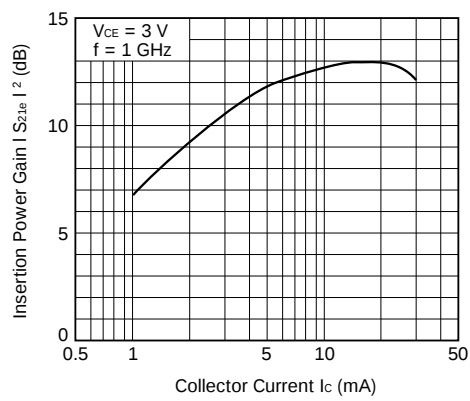
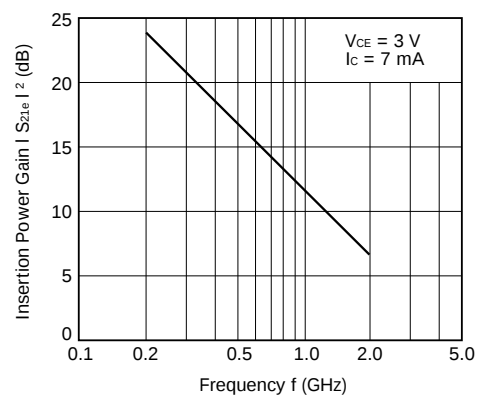
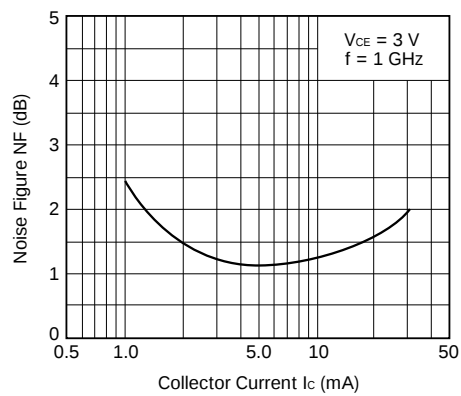
Notes 1. Pulse Measurement: $P_w \leq 350\text{ }\mu\text{s}$, Duty cycle $\leq 2\%$

2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

 h_{FE} CLASSIFICATION

Rank	FB	GB
Marking	R34	R35
h_{FE} Value	70 to 150	110 to 240

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

$C_{re} - V_{CB}$ Characteristics $f_r - I_c$ Characteristics $|S_{21e}|^2 - I_c$ Characteristics $|S_{21e}|^2 - f$ CharacteristicsNF - I_c Characteristics

S-PARAMETERS

 $V_{CE} = 3 \text{ V}$, $I_C = 7 \text{ mA}$, $Z_o = 50 \Omega$

FREQUENCY MHz	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.000	.804	-23.8	11.631	154.8	.023	74.8	.920	-16.5
200.000	.692	-48.6	10.839	137.5	.040	64.1	.791	-27.7
300.000	.581	-70.3	9.722	123.8	.050	59.9	.675	-33.5
400.000	.489	-89.0	8.519	112.9	.060	56.7	.597	-37.0
500.000	.419	-104.9	7.434	104.1	.067	55.9	.538	-38.7
600.000	.376	-117.1	6.468	97.5	.075	55.6	.497	-40.0
700.000	.342	-128.6	5.729	91.8	.082	55.7	.467	-41.0
800.000	.321	-138.4	5.115	86.7	.089	56.3	.443	-41.7
900.000	.305	-147.3	4.630	82.5	.096	56.1	.427	-42.5
1000.000	.296	-155.2	4.207	78.5	.104	56.4	.412	-43.6
1100.000	.289	-162.2	3.879	74.8	.111	56.0	.401	-44.6
1200.000	.284	-169.3	3.595	71.4	.119	56.4	.393	-45.8
1300.000	.282	-175.3	3.349	68.1	.127	56.2	.384	-47.3
1400.000	.281	-179.0	3.133	64.8	.136	56.0	.379	-48.8
1500.000	.283	-173.8	2.945	61.9	.143	55.4	.372	-50.1
1600.000	.283	-168.6	2.780	58.8	.151	55.0	.367	-51.8
1700.000	.285	-163.8	2.631	56.2	.160	54.4	.363	-53.7
1800.000	.286	-159.9	2.514	53.3	.168	53.9	.359	-55.4
1900.000	.289	-155.4	2.390	50.5	.177	53.3	.354	-57.3
2000.000	.293	-151.8	2.293	47.8	.186	52.5	.351	-59.2

 $V_{CE} = 3 \text{ V}$, $I_C = 5 \text{ mA}$, $Z_o = 50 \Omega$

FREQUENCY MHz	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.0000	.818	-29.4	14.580	156.2	.023	79.9	.932	-14.4
200.0000	.689	-54.3	12.120	137.5	.040	65.1	.824	-23.4
300.0000	.594	-73.1	10.142	124.6	.052	55.0	.716	-30.3
400.0000	.500	-89.8	8.340	114.4	.063	58.5	.620	-32.2
500.0000	.457	-102.8	7.300	107.5	.069	56.4	.577	-34.2
600.0000	.404	-115.0	6.211	101.0	.081	54.9	.525	-35.1
700.0000	.377	-124.4	5.496	96.8	.084	59.5	.511	-36.1
800.0000	.359	-134.3	4.908	91.4	.091	58.4	.471	-36.2
900.0000	.342	-141.5	4.450	88.1	.097	58.4	.458	-35.3
1000.0000	.335	-150.3	4.018	84.7	.100	61.2	.440	-36.5
1100.0000	.326	-155.9	3.750	81.4	.112	61.8	.442	-36.8
1200.0000	.321	-162.4	3.410	78.1	.115	61.4	.417	-37.8
1300.0000	.317	-167.2	3.181	75.6	.124	62.3	.412	-38.5
1400.0000	.321	-173.4	2.995	72.5	.131	63.9	.411	-39.9
1500.0000	.318	-177.5	2.802	69.8	.138	63.6	.407	-40.4
1600.0000	.320	-176.6	2.665	67.3	.149	66.4	.400	-41.1
1700.0000	.323	-173.2	2.533	66.1	.156	65.3	.394	-43.7
1800.0000	.326	-167.8	2.369	63.0	.162	65.9	.394	-44.3
1900.0000	.331	-165.6	2.275	61.0	.177	65.4	.390	-45.5
2000.0000	.333	-161.4	2.196	59.2	.183	64.5	.384	-47.6

 $V_{CE} = 3 \text{ V}$, $I_C = 3 \text{ mA}$, $Z_o = 50 \Omega$

FREQUENCY MHz	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.0000	.906	-22.7	9.710	161.6	.026	82.5	.962	-10.6
200.0000	.810	-43.7	8.541	145.3	.049	63.8	.895	-18.3
300.0000	.742	-60.6	7.695	133.4	.062	58.7	.811	-25.8
400.0000	.638	-76.6	6.580	122.4	.073	56.0	.732	-27.7
500.0000	.587	-89.8	5.934	114.1	.082	53.4	.680	-31.2
600.0000	.524	-102.2	5.148	107.1	.091	49.7	.624	-33.5
700.0000	.490	-111.4	4.627	102.2	.094	51.8	.603	-34.4
800.0000	.460	-121.4	4.181	96.0	.099	51.2	.568	-35.0
900.0000	.435	-129.9	3.827	92.6	.101	52.9	.540	-35.7
1000.0000	.427	-138.2	3.443	88.1	.107	50.9	.523	-36.7
1100.0000	.404	-144.9	3.199	84.2	.115	53.7	.512	-36.8
1200.0000	.399	-151.7	2.989	79.8	.113	56.6	.500	-38.6
1300.0000	.392	-157.9	2.779	77.4	.121	54.9	.489	-39.2
1400.0000	.392	-163.6	2.638	73.5	.126	56.4	.483	-40.4
1500.0000	.386	-169.1	2.443	71.3	.135	56.4	.477	-41.8
1600.0000	.380	-174.5	2.344	68.0	.137	60.0	.477	-42.4
1700.0000	.382	-179.7	2.239	65.3	.143	59.5	.466	-44.4
1800.0000	.389	-176.1	2.113	63.0	.151	59.4	.461	-44.9
1900.0000	.383	-172.5	2.025	61.4	.154	62.6	.456	-46.9
2000.0000	.387	-168.3	1.922	58.2	.163	62.0	.464	-48.3

$V_{CE} = 3 \text{ V}$, $I_C = 1 \text{ mA}$, $Z_O = 50 \Omega$

FREQUENCY	S11		S21		S12		S22	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.0000	1.009	-14.5	3.544	168.8	.027	78.6	.994	-5.6
200.0000	.955	-29.7	3.359	156.3	.055	73.6	.969	-10.1
300.0000	.937	-42.6	3.277	147.1	.073	63.4	.947	-15.9
400.0000	.864	-56.2	3.034	136.6	.091	57.7	.898	-18.8
500.0000	.838	-67.3	2.891	128.6	.107	51.1	.865	-22.1
600.0000	.775	-79.3	2.674	120.0	.116	46.6	.824	-25.8
700.0000	.745	-88.5	2.485	114.2	.125	45.2	.803	-27.5
800.0000	.708	-99.1	2.338	106.8	.127	41.2	.776	-29.7
900.0000	.670	-107.9	2.177	101.4	.132	40.2	.740	-31.5
1000.0000	.649	-116.8	2.052	96.0	.135	37.2	.723	-33.7
1100.0000	.621	-124.0	1.914	90.8	.131	36.6	.719	-34.2
1200.0000	.608	-131.8	1.819	86.0	.129	35.4	.700	-36.3
1300.0000	.587	-138.5	1.713	82.4	.130	35.2	.691	-37.6
1400.0000	.587	-144.5	1.628	77.7	.128	36.1	.681	-39.2
1500.0000	.573	-152.6	1.533	73.4	.127	36.0	.662	-40.7
1600.0000	.559	-157.1	1.464	70.3	.124	37.5	.660	-42.7
1700.0000	.562	-164.2	1.421	67.2	.120	39.1	.658	-44.0
1800.0000	.557	-168.9	1.350	64.7	.122	43.3	.658	-46.0
1900.0000	.557	-173.9	1.296	61.1	.122	45.2	.641	-47.8
2000.0000	.551	-178.6	1.240	58.0	.124	48.5	.643	-50.1

[MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

“Standard”, “Special”, and “Specific”. The Specific quality grade applies only to devices developed based on a customer designated “quality assurance program” for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in “Standard” unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.