

HIGH-FREQUENCY LOW NOISE AMPLIFIER

NPN SILICON EPITAXIAL TRANSISTOR

(WITH BUILT-IN 2 $\times$ 2SC4227) SMALL MINI MOLD

The μ PA812T has built-in 2 low-voltage transistors which are designed to amplify low noise in the VHF band to the UHF band.

FEATURES

- Low Noise
NF = 1.4 dB TYP. @ f = 1 GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- High Gain
 $|S_{21e}|^2 = 12$ dB TYP. @ f = 1 GHz, $V_{CE} = 3$ V, $I_C = 7$ mA
- A Small Mini Mold Package Adopted
- Built-in 2 Transistors (2 $\times$ 2SC4227)

ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
μ PA812T	Loose products (50 PCS)	Embossed tape 8 mm wide. Pin 6 (Q1 Base), Pin 5 (Q1 Emitter), Pin 4 (Q2 Emitter) face to perforation side of the tape.
μ PA812T-T1	Taping products (3 KPCS/Reel)	

Remark If you require an evaluation sample, please contact an NEC Sales Representative. (Unit sample quantity is 50 pcs.)



ABSOLUTE MAXIMUM RATINGS ($T_A = 25$ °C)

PARAMETER	SYMBOL	RATING	UNIT
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	10	V
Emitter to Base Voltage	V_{EBO}	1.5	V
Collector Current	I_C	65	mA
Total Power Dissipation	P_T	150 in 1 element 200 in 2 elements ^{Note}	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	-65 to +150	°C


Note 110 mW must not be exceeded in 1 element.

PACKAGE DRAWINGS

(Unit: mm)

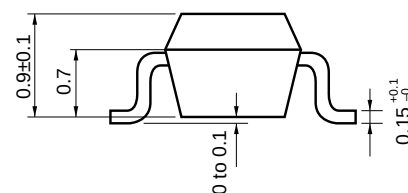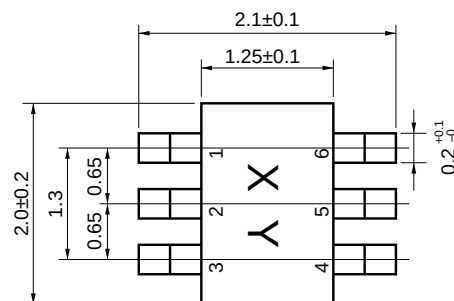

PIN CONFIGURATION (Top View)



PIN CONNECTIONS

- | | |
|-------------------|-----------------|
| 1. Collector (Q1) | 4. Emitter (Q2) |
| 2. Base (Q2) | 5. Emitter (Q1) |
| 3. Collector (Q2) | 6. Base (Q1) |

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)





PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cutoff Current	I_{CBO}	$V_{CB} = 10\text{ V}, I_E = 0$			0.8	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 1\text{ V}, I_C = 0$			0.8	μA
DC Current Gain	h_{FE}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ ^{Note 1}	70		240	
Gain Bandwidth Product	f_T	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$	4.5	7.0		GHz
Feed-back Capacitance	C_{re}	$V_{CB} = 3\text{ V}, I_E = 0, f = 1\text{ MHz}$ ^{Note 2}			0.9	pF
Insertion Power Gain	$ S_{21e} ^2$	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$	10	12		dB
Noise Figure	NF	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}, f = 1\text{ GHz}$		1.4	2.7	dB
h_{FE} Ratio	h_{FE1}/h_{FE2}	$V_{CE} = 3\text{ V}, I_C = 7\text{ mA}$ A smaller value among h_{FE} of $h_{FE1} = Q1, Q2$ A larger value among h_{FE} of $h_{FE2} = Q1, Q2$	0.85			

Notes 1. Pulse Measurement: $P_w \leq 350\text{ }\mu\text{s}$, Duty cycle $\leq 2\%$


2. Measured with 3-pin bridge, emitter and case should be connected to guard pin of bridge.

 h_{FE} CLASSIFICATION


Rank	FB	GB
Marking	34R	35R
h_{FE} Value	70 to 150	110 to 240

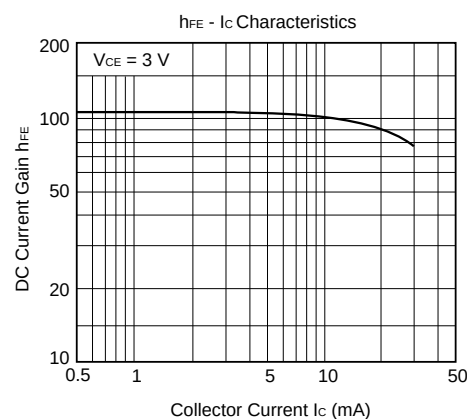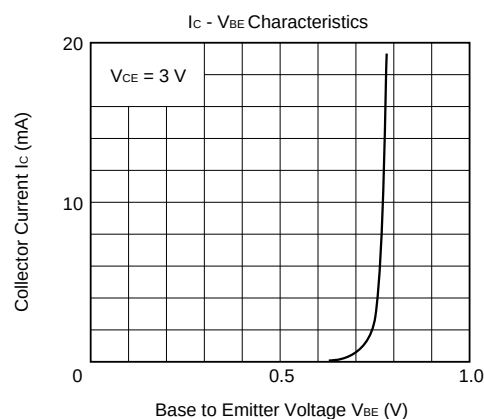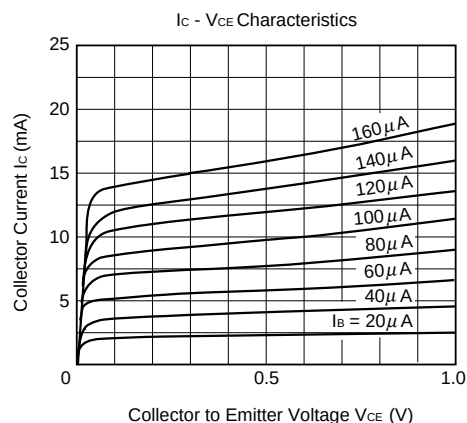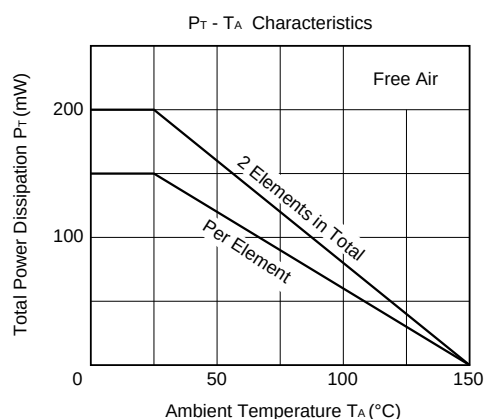TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)


$C_{re} - V_{CB}$ Characteristics

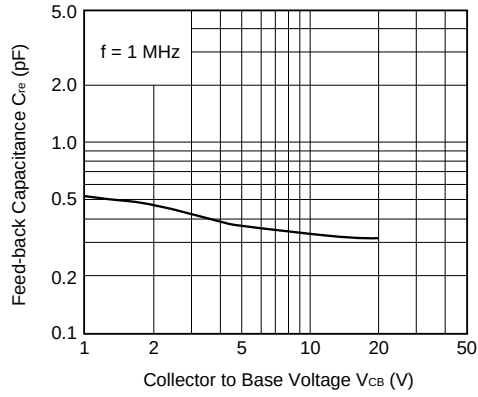


$f_r - I_c$ Characteristics

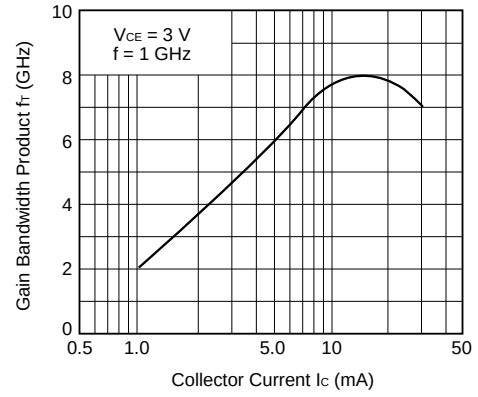


$|S_{21e}|^2 - I_c$ Characteristics

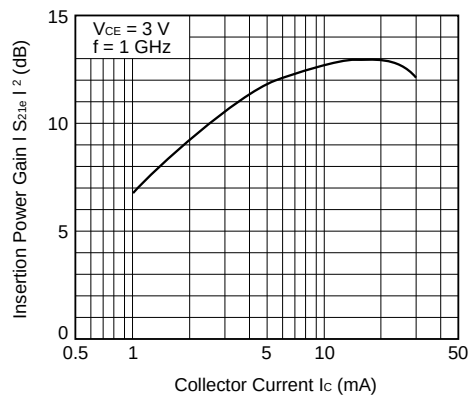

$|S_{21e}|^2 - f$ Characteristics

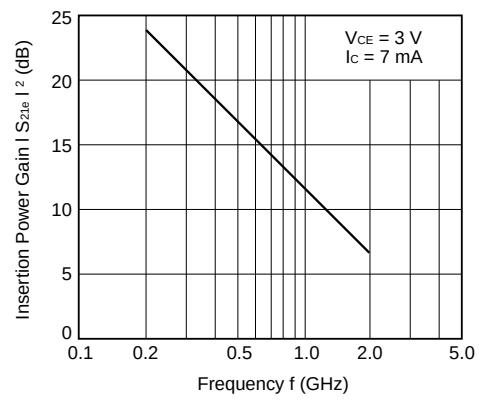

NF - I_c Characteristics

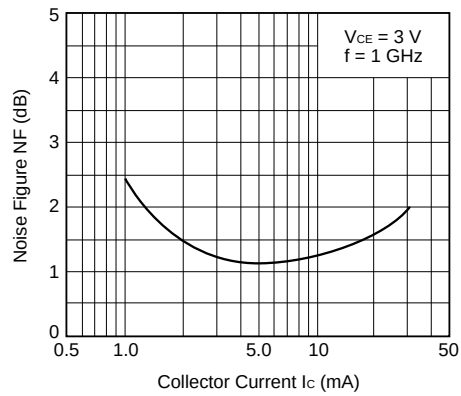

S-PARAMETERS $V_{CE} = 3\text{ V}$, $I_C = 1\text{ mA}$

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	0.966	-13.9	3.691	168.9	0.025	85.1	0.995	-5.1	
200.00	0.947	-25.9	3.436	159.6	0.045	72.9	0.978	-9.2	
300.00	0.878	-37.8	3.310	147.9	0.067	65.7	0.936	-14.3	
400.00	0.866	-48.5	3.089	142.0	0.084	60.8	0.916	-16.9	
500.00	0.833	-58.4	2.955	132.3	0.097	53.8	0.858	-19.4	
600.00	0.809	-71.5	2.859	127.1	0.110	51.7	0.847	-22.0	
700.00	0.767	-82.4	2.718	116.8	0.117	45.7	0.819	-23.2	
800.00	0.704	-92.8	2.608	110.6	0.127	42.4	0.804	-26.3	
900.00	0.659	-101.8	2.389	102.8	0.128	40.3	0.782	-28.3	
1000.00	0.630	-110.4	2.242	96.8	0.132	36.0	0.752	-32.1	
1100.00	0.609	-119.2	2.097	92.3	0.135	36.0	0.720	-33.7	
1200.00	0.582	-128.2	2.024	86.7	0.138	33.2	0.678	-35.6	
1300.00	0.562	-136.0	1.935	83.4	0.143	31.5	0.659	-36.1	
1400.00	0.547	-142.6	1.826	77.5	0.136	30.3	0.632	-36.5	
1500.00	0.549	-150.4	1.765	73.4	0.138	29.3	0.634	-37.4	
1600.00	0.548	-158.0	1.682	69.9	0.132	32.1	0.622	-38.2	
1700.00	0.536	-167.1	1.618	65.6	0.135	31.5	0.621	-41.1	
1800.00	0.523	-172.7	1.589	62.5	0.137	34.6	0.612	-42.9	
1900.00	0.506	-177.9	1.527	57.5	0.139	34.5	0.590	-45.8	
2000.00	0.522	177.6	1.489	52.5	0.143	33.9	0.577	-48.0	

 $V_{CE} = 3\text{ V}$, $I_C = 3\text{ mA}$

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	0.898	-22.1	9.389	161.7	0.023	79.6	0.974	-9.5	
200.00	0.830	-40.3	8.404	146.9	0.041	70.0	0.910	-16.5	
300.00	0.714	-56.9	7.363	132.7	0.058	59.3	0.820	-23.1	
400.00	0.651	-69.8	6.494	124.7	0.068	55.8	0.759	-25.6	
500.00	0.588	-81.3	5.717	115.4	0.075	51.5	0.682	-27.1	
600.00	0.546	-94.6	5.214	110.6	0.083	51.6	0.651	-28.3	
700.00	0.500	-106.0	4.680	101.3	0.088	49.1	0.617	-28.4	
800.00	0.452	-116.3	4.326	96.6	0.095	48.9	0.596	-29.9	
900.00	0.422	-125.3	3.818	89.9	0.098	49.7	0.576	-31.0	
1000.00	0.404	-133.9	3.502	85.1	0.104	47.7	0.548	-33.5	
1100.00	0.387	-142.2	3.376	81.9	0.109	49.6	0.522	-34.3	
1200.00	0.371	-150.9	3.164	77.5	0.114	48.8	0.491	-35.4	
1300.00	0.361	-157.3	2.986	74.6	0.123	49.3	0.474	-35.1	
1400.00	0.355	-162.7	2.772	70.4	0.124	49.6	0.455	-34.8	
1500.00	0.366	-169.0	2.632	67.0	0.131	49.0	0.453	-35.0	
1600.00	0.375	-175.4	2.486	64.5	0.134	52.2	0.443	-35.5	
1700.00	0.374	176.8	2.379	61.3	0.143	51.0	0.439	-37.7	
1800.00	0.370	171.8	2.317	58.7	0.152	52.7	0.429	-39.4	
1900.00	0.365	167.5	2.212	54.4	0.159	51.1	0.410	-41.7	
2000.00	0.378	164.5	2.151	49.8	0.170	49.6	0.396	-43.4	

S-PARAMETERS $V_{CE} = 3\text{ V}$, $I_C = 5\text{ mA}$

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	0.838	-28.0	13.699	156.6	0.022	74.9	0.950	-12.9	
200.00	0.730	-50.0	11.577	138.5	0.038	66.2	0.848	-21.0	
300.00	0.598	-68.3	9.624	124.0	0.052	58.1	0.734	-27.2	
400.00	0.519	-81.6	8.123	115.7	0.059	56.2	0.661	-28.6	
500.00	0.459	-93.4	6.915	107.5	0.065	54.1	0.587	-28.8	
600.00	0.420	-106.1	6.163	103.3	0.073	56.0	0.559	-29.0	
700.00	0.382	-117.3	5.439	95.2	0.079	55.0	0.530	-28.3	
800.00	0.350	-127.2	4.972	91.1	0.088	55.4	0.513	-29.1	
900.00	0.331	-136.1	4.347	85.3	0.093	56.3	0.498	-29.8	
1000.00	0.321	-144.4	3.957	80.7	0.100	55.3	0.476	-31.9	
1100.00	0.310	-152.5	3.645	77.8	0.107	56.4	0.453	-32.5	
1200.00	0.302	-160.7	3.419	73.9	0.113	55.7	0.426	-33.3	
1300.00	0.295	-166.8	3.333	71.6	0.123	56.4	0.412	-32.8	
1400.00	0.294	-171.5	3.084	68.0	0.127	56.1	0.395	-32.3	
1500.00	0.308	-177.0	2.917	64.8	0.136	54.7	0.394	-32.5	
1600.00	0.319	177.6	2.753	62.7	0.141	57.7	0.385	-32.8	
1700.00	0.322	170.4	2.629	59.8	0.153	56.1	0.380	-34.9	
1800.00	0.322	165.8	2.555	57.3	0.162	56.8	0.370	-36.5	
1900.00	0.321	162.0	2.438	53.4	0.170	54.7	0.352	-38.7	
2000.00	0.334	159.4	2.365	49.0	0.182	52.7	0.337	-40.1	

 $V_{CE} = 3\text{ V}$, $I_C = 7\text{ mA}$

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	0.775	-33.7	17.552	151.6	0.020	75.0	0.922	-15.7	
200.00	0.638	-58.3	14.050	131.9	0.035	65.7	0.785	-24.3	
300.00	0.502	-77.4	11.178	117.2	0.047	58.9	0.661	-29.3	
400.00	0.424	-90.9	9.075	109.5	0.054	58.6	0.588	-29.4	
500.00	0.371	-102.6	7.636	102.2	0.060	57.7	0.526	-28.8	
600.00	0.339	-114.8	6.710	98.8	0.068	60.5	0.500	-28.1	
700.00	0.310	-126.0	5.868	91.3	0.075	59.5	0.477	-27.1	
800.00	0.289	-135.6	5.329	87.7	0.085	60.2	0.464	-27.6	
900.00	0.276	-144.0	4.644	82.4	0.090	60.9	0.453	-28.2	
1000.00	0.273	-152.1	4.219	78.2	0.100	59.3	0.432	-30.1	
1100.00	0.266	-159.9	3.879	75.6	0.107	61.0	0.416	-30.5	
1200.00	0.263	-167.8	3.631	72.0	0.114	59.7	0.389	-31.3	
1300.00	0.260	-173.5	3.538	69.8	0.126	59.9	0.377	-30.5	
1400.00	0.260	-177.7	3.265	66.4	0.130	59.4	0.361	-30.2	
1500.00	0.275	177.5	3.079	63.4	0.140	58.0	0.360	-30.2	
1600.00	0.288	172.7	2.904	61.5	0.146	60.3	0.352	-30.5	
1700.00	0.294	166.0	2.772	59.0	0.158	58.3	0.346	-32.7	
1800.00	0.295	161.7	2.693	56.5	0.169	58.9	0.337	-34.1	
1900.00	0.297	158.3	2.569	52.6	0.177	56.5	0.319	-36.1	
2000.00	0.309	156.2	2.493	48.3	0.190	54.3	0.303	-37.5	

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customer must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

“Standard”, “Special”, and “Specific”. The Specific quality grade applies only to devices developed based on a customer designated “quality assurance program” for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices in “Standard” unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact NEC Sales Representative in advance.

Anti-radioactive design is not implemented in this product.