


## FEATURES

- . The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- . Construction utilizes void-free molded plastic technique
- . 1.5A operation at  $T_L=70^{\circ}\text{C}$  with no thermal runaway
- . Low reverse leakage
- . High forward surge current capability
- . High temperature soldering guaranteed:  $250^{\circ}\text{C}/10$  seconds,  $0.375''(9.5\text{mm})$ lead length,5lbs.(2.3kg)tension

## MECHANICAL DATA

- . **Case:** JEDEC DO-15 molded plastic body
- . **Terminals:** lead solderable per MIL-STD-750,method 2026
- . **Polarity:** Color band denotes cathode end
- . **Mounting Position:** Any
- . **Weight:** 0.014 ounce, 0.33 gram

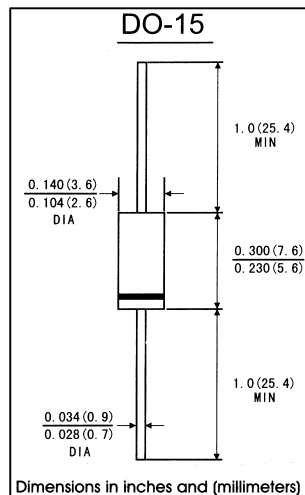

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at  $25^{\circ}\text{C}$  ambient temperature unless otherwise specified,Single phase,half wave 60Hz,resistive or inductive)

load. For capacitive load,derate by 20%)


|                                                                                                         | Symbols              | 1N<br>5391                         | 1N<br>5392  | 1N<br>5393 | 1N<br>5394 | 1N<br>5395 | 1N<br>5396 | 1N<br>5397 | 1N<br>5398 | 1N<br>5399 | Units |
|---------------------------------------------------------------------------------------------------------|----------------------|------------------------------------|-------------|------------|------------|------------|------------|------------|------------|------------|-------|
| Maximum repetitive peak reverse voltage                                                                 | V <sub>RRM</sub>     | 50                                 | 100         | 200        | 300        | 400        | 500        | 600        | 800        | 1000       | Volts |
| Maximum RMS voltage                                                                                     | V <sub>RMS</sub>     | 35                                 | 70          | 140        | 210        | 280        | 350        | 420        | 560        | 700        | Volts |
| Maximum DC blocking voltage                                                                             | V <sub>DC</sub>      | 50                                 | 100         | 200        | 300        | 400        | 500        | 600        | 800        | 1000       | Volts |
| Macimum average forward rectified current 0.375"(9.5mm)lead length at T <sub>A</sub> =70℃               | I <sub>(AV)</sub>    | 1.5                                |             |            |            |            |            |            |            |            | Amps  |
| Peak forward surge current 8.3ms sing-wave superimposed on rated load (JEDEC method)T <sub>A</sub> =70℃ | I <sub>FSM</sub>     | 50.0                               |             |            |            |            |            |            |            |            | Amps  |
| Maximum instantaneous forward voltage at 1.5 A                                                          |                      | V <sub>F</sub>                     | 1.4         |            |            |            |            |            |            |            | Volts |
| Maximum reverse current at rated DC blocking voltage                                                    | T <sub>A</sub> =25℃  | I <sub>R</sub>                     | 5.0         |            |            |            |            |            |            |            | μ A   |
|                                                                                                         | T <sub>A</sub> =100℃ |                                    | 50.0        |            |            |            |            |            |            |            |       |
| Typeical thermal resistance(Note 2)                                                                     | Rθ <sub>JA</sub>     | 50.0                               |             |            |            |            |            |            |            | ℃/W        |       |
|                                                                                                         | Rθ <sub>JL</sub>     | 25.0                               |             |            |            |            |            |            |            |            |       |
| Typical junction Capacitance(Note 1)                                                                    |                      | C <sub>J</sub>                     | 20.0        |            |            |            |            |            |            |            | pF    |
| Maximum DC Blocking Voltage temperature                                                                 |                      | T <sub>A</sub>                     | +150        |            |            |            |            |            |            |            | ℃     |
| Operating and storage temperature range                                                                 |                      | T <sub>J</sub><br>T <sub>STG</sub> | -65 to +175 |            |            |            |            |            |            |            | ℃     |

**Notes:** 1. Measured at 1MHz and applied reverse voltage of 4.0V DC


2.Thermal resistance from juntion to ambient and from junction lead at 0.375''(9.5mm)lead length,  
P.C.B. Mounted

**RATINGS AND CHARACTERISTIC CURVES 1N5391 THRU 1N5399**


**FIG.1-FORWARD CURRENT DERATING CURVE**

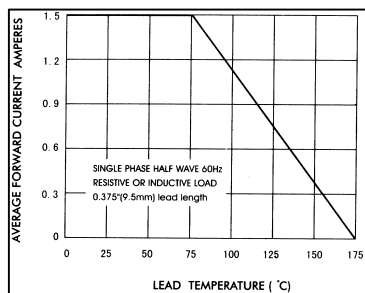


**FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

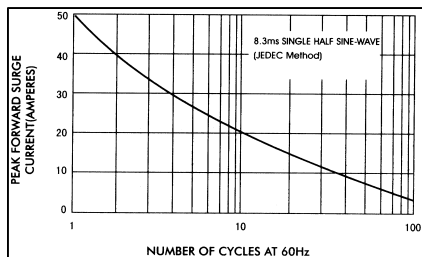

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

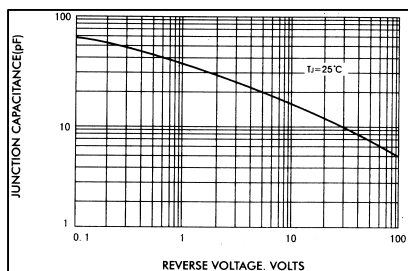

**FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

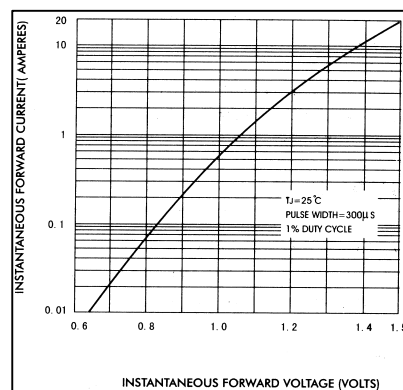

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

