


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss,high efficiency
- High current capability ,Low forward voltage drop
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling , and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds at terminals, 0.375"(9.5mm)lead length,5lbs.(2.3kg)tension

MECHANICAL DATA

- Case:** JEDEC DO-201AD molded plastic body
- Terminals:** Solder plated,solderable per MIL-STD-750,method 2026
- Polarity:** color band denotes cathode end
- Mounting Position:** Any
- Weight:** 0.0041 ounce, 1.15 gram

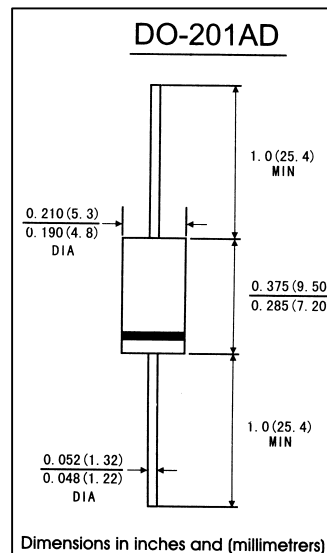

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified,Single phase,half wave,resistive or inductive)

load. For capacitive load,derate by 20%)

	Symbols	1N5820	1N5821	1N5822	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	Volts
Maximum non-repetitive peak reverse voltage	V _{RSM}	24	36	48	Volts
Macimum average forward rectified current 0.375"(9.5mm)lead length at TL=90℃	I(AV)	3.0			Amp
Peak forward surge current 8.3ms singel half sine-wave superimposed on rated load (JEDEC method) at TL=75℃)	I _{FSM}	80.0			Amps
Maximum instantaneous forward voltage at 1.0 A(Note 1)	V _F	0.475	0.500	0.525	Volts
Maximum instantaneous forward voltage at 3.1 A(Note 1)	V _F	0.850	0.900	0.950	Volts
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	TA=25℃	I _R	1.5		mA
	TA=100℃		20.0		
Typeical thermal resistance(Note 2)	R θ _{JA}	40.0			℃/W
	R θ _{JL}	10.0			
Operating iunction and storage temperature range	T _J /T _{STG}	-65 to +125			℃

Notes: 1. Pulse test: 30Cμs pulse width,1% duty cycle

2.Thermal resistance (from junction to ambient)Vertical P.C.B. Mounted,0.500"(12.7mm)lead length with 2.5X2.5(63.5X63.5mm)copper pads

RATINGS AND CHARACTERISTIC CURVES 1N5820 THRU 1N5822

FIG.1-FORWARD CURRENT DERATING CURVE

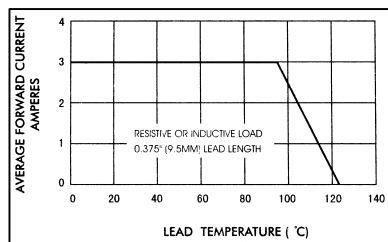


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

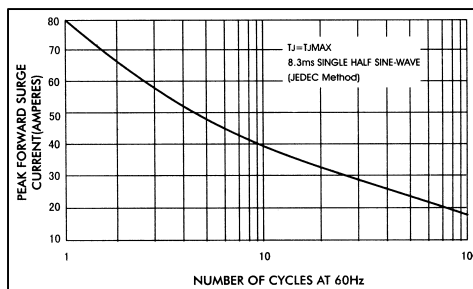


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

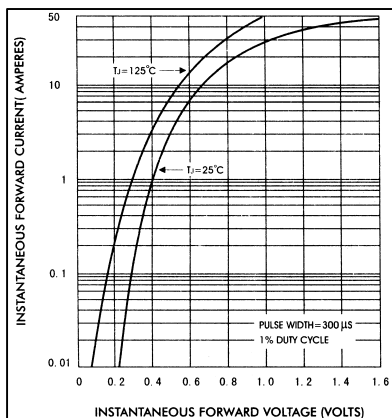


FIG.4-TYPICAL REVERSE CHARACTERISTICS

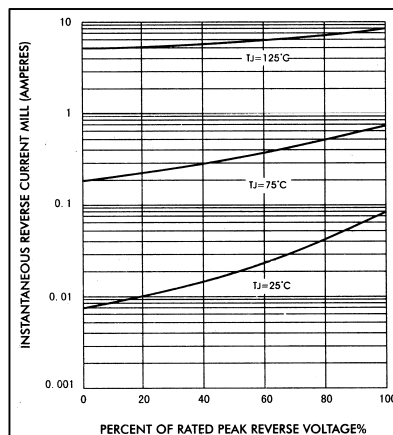


FIG.5-TYPICAL JUNCTION CAPACITANCE

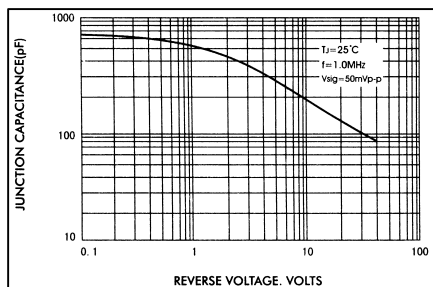


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

