



ES2A THRU ES2G

SURFACE MOUNT SUPER FAST SWITCHING RECTIFIER

TECHNICAL SPECIFICATION

VOLTAGE: 50 TO 400V CURRENT: 2.0A


FEATURES

- Ideal for surface mount pick and place application
- Low profile package
- Built-in strain relief
- High surge capability
- Glass passivated chip
- Super fast recovery for high efficiency
- High temperature soldering guaranteed: 260°C/10sec/at terminal

MECHANICAL DATA

- Terminal: Plated leads solderable per MIL-STD 202E, method 208C
- Case: Molded with UL-94 Class V-O recognized flame retardant epoxy
- Polarity: Color band denotes cathode

SMB/DO-214AA

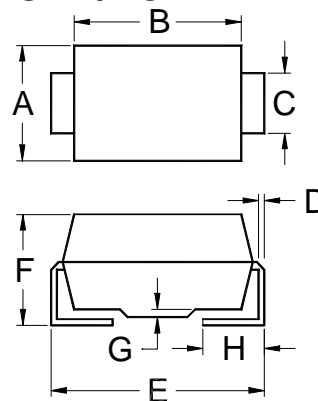

	A	B	C	D
MAX.	.155(3.94)	.180(4.57)	.083(2.11)	.012(0.305)
MIN.	.130(3.30)	.160(4.06)	.077(1.96)	.006(0.152)
	E	F	G	H
MAX.	.220(5.59)	.096(2.44)	.008(0.203)	.060(1.52)
MIN.	.205(5.21)	.084(2.13)	.004(0.102)	.030(0.76)

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60Hz, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

RATINGS	SYMBOL	ES2A	ES2B	ES2C	ES2D	ES2E	ES2G	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	V
Maximum Average Forward Rectified Current ($T_L=110^\circ\text{C}$)	$I_{F(AV)}$	2.0						A
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load)	I_{FSM}	50						A
Maximum Instantaneous Forward Voltage (at rated forward current)	V_F	0.95			1.25			V
Maximum DC Reverse Current ($T_a=25^\circ\text{C}$)	I_R	5.0						μA
(at rated DC blocking voltage) ($T_a=100^\circ\text{C}$)		350						μA
Maximum Reverse Recovery Time (Note 1)	t_{rr}	35						nS
Typical Junction Capacitance (Note 2)	C_J	25						pF
Typical Thermal Resistance (Note 3)	$R_{\theta(ja)}$	20						$^\circ\text{C/W}$
Storage and Operation Junction Temperature	T_{STG}, T_J	-50 to +150						$^\circ\text{C}$

Note:

- 1.Reverse recovery condition $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$.
- 2.Measured at 1.0 MHz and applied voltage of 4.0V_{dc}
- 3.Thermal resistance from junction to terminal mounted on 5x5mm copper pad area