



CHENYI ELECTRONICS

GBPC25005 THRU GBPC2510

SINGLE PHASE SILICON
PASSIVATED BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:25A


FEATURES

Surge overload rating: 300A peak
Low profile design
1/4" Universal faston terminal
and Ø40ml lead--wire available

MECHANICAL DATA

- Polarity:** Polarity symbol marked on body
- Mounting :** Hole thru #10 screw

GBPC



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60HZ, resistive or inductive load rating at 25 °C , unless otherwise stated,

for capacitive load, derate current by 20%)

	SYMBOL	GBPC 25005	GBPC 2501	GBPC 2502	GBPC 2504	GBPC 2506	GBPC 2508	GBPC 2510	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	Vrms	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	Vdc	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified current 3/8" lead length at Ta=55 °C	If(av)	25							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	300							A
Maximum Instantaneous Forward Voltage at forward current 12.5A	Vf	1.1							V
Maximum DC Reverse Voltage Ta=25 °C	Ir	10.0							μ A
at rated DC blocking voltage Ta=100 °C		500							μ A
Operating Temperature Range	Tj	-55 to +175							°C
Storage and operation Junction Temperature	Tstg	-55 to +175							°C

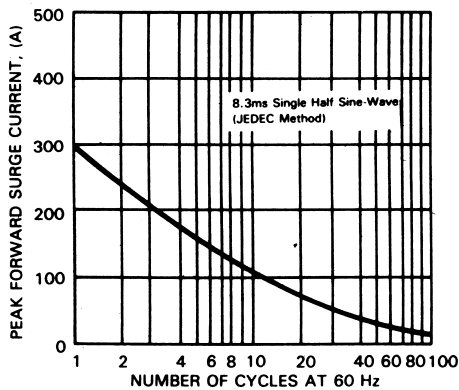
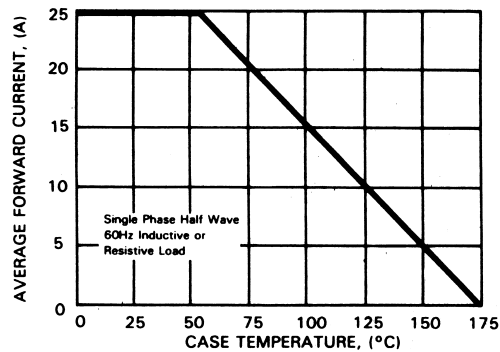
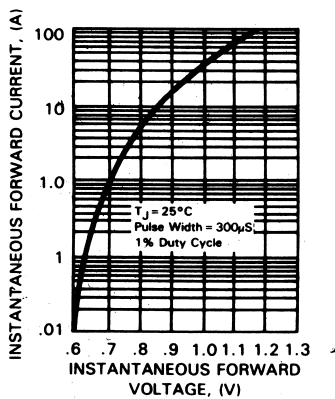
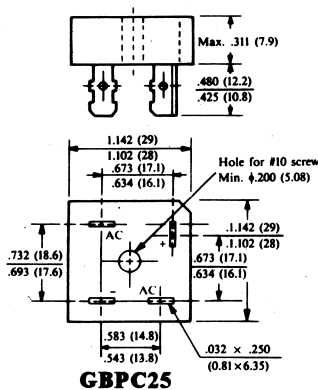
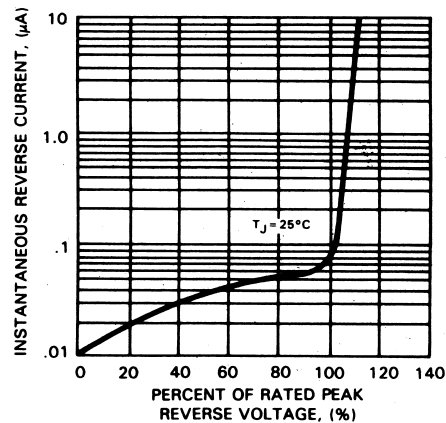
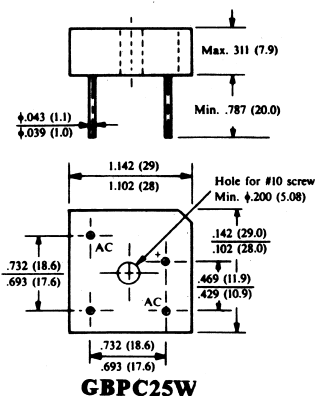
Note: Suffix "W" for wire type

CE

CHENYI ELECTRONICS

GBPC25005 THRU GBPC2510**SINGLE PHASE SILICON
PASSIVATED BRIDGE RECTIFIER**

Voltage: 50 TO 1000V CURRENT:25A

RATINGS AND CHARACTERISTIC CURVES GBPC25005 THRU GBPC2510**FIG.1-MAXIMUM NON-REPETITIVE FORWARD****SURGE CURRENT****FIG.2-TYPICAL FORWARD CURRENT****DERATING CURVE****FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS****FIG.4-TYPICAL REVERSE CHARACTERISTICS****GBPC25****GBPC25W**