


FEATURES

Surge overload rating: 200A peak

High case dielectric strength

MECHANICAL DATA

- Terminal:** Plated leads solderable per MIL-STD 202E, method 208C
- Case:** UL-94 Class V-0 recognized Flame Retardant Epoxy
- Polarity:** Polarity symbol marked on body
- Mounting :** Hole thru for #6 screw

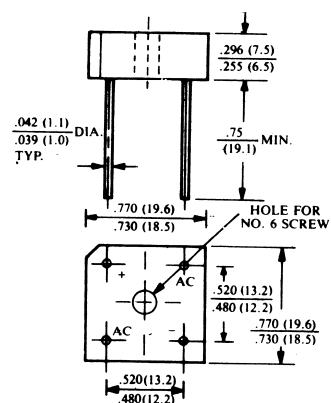KBPC10

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60HZ, resistive or inductive load rating at 25 °C , unless otherwise stated,

for capacitive load, derate current by 20%)

	SYMBOL	KBPC 10005	KBPC 1001	KBPC 1002	KBPC 1004	KBPC 1006	KBPC 1008	KBPC 1010	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{rms}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{dc}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified current at T _a =25 °C	I _{f(av)}	10.0							A
T _a =50 °C		6.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I _{fsm}	200							A
Maximum Instantaneous Forward Voltage at forward current 5.0A DC	V _f	1.1							V
Maximum DC Reverse Voltage T _a =25 °C	I _r	10.0							μ A
at rated DC blocking voltage T _a =100 °C		200							μ A
Operating Temperature Range	T _j	-55 to +125							°C
Storage and operation Junction Temperature	T _{stg}	-55 to +150							°C

CE

CHENYI ELECTRONICS

KBPC10005 THRU KBPC1010

SINGLE PHASE SILICON

BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:10A

RATINGS AND CHARACTERISTIC CURVES KBPC10005 THRU KBPC1010

FIG.1-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

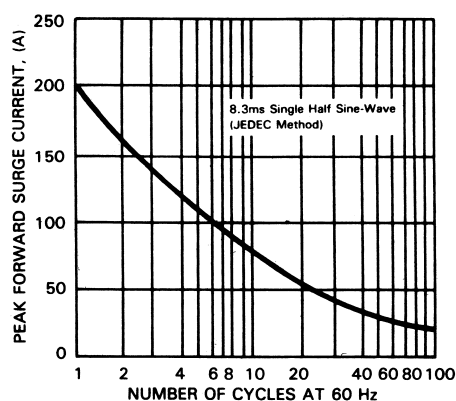


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

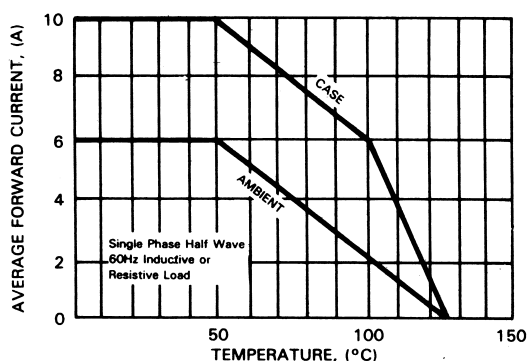


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

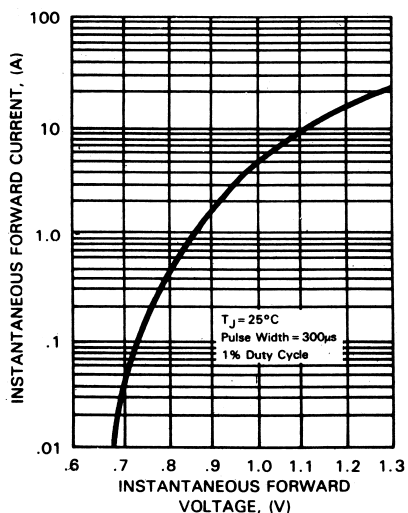


FIG.4-TYPICAL REVERSE CHARACTERISTICS

