


SILICON POWER DARLINGTON TRANSISTORS

(PNP) 2N6034, 2N6035, 2N6036
(NPN) 2N6037, 2N6038, 2N6039

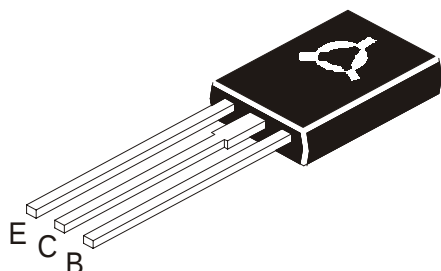

TO126
Plastic Package

Designed for General -Purpose Amplifier & Low Speed Switching Applications.

ABSOLUTE MAXIMUM RATINGS(Ta=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	2n6034 2n6037	2N6035 2N6038	2N6036 2N6039	UNIT
Collector -Base Voltage	V_{CBO}	40	60	80	V
Collector -Emitter Voltage	V_{CEO}	40	60	80	V
Emitter Base Voltage	V_{EBO}		5.0		V
Collector Current Continuous	I_C		4.0		A
Collector Current (Peak Value)			8.0		A
Base Current	I_B		100		mA
Total Power Dissipation @ Tc=25°C	P_D		40		W
Derate above 25°C			0.32		W/°C
Total Power Dissipation @ Ta=25°C	P_D		1.5		W
Derate above 25°C			0.012		W/°C

Operating And Storage Junction Temperature Range	T_j, T_{stg}	-65 to +150	°C
--	----------------	-------------	----

THERMAL RESISTANCE


Junction to ambient	$R_{th(j-a)}$	83.3	°C/W
Junction to case	$R_{th(j-c)}$	3.12	°C/W

ELECTRICAL CHARACTERISTICS (Ta=25°C unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter (sus) Voltage	$V_{CEO(sus)}$	$I_C=100mA, I_B=0$				
2N6034,2N6037			40			V
2N6035, 2N6038			60			V
2N6036, 2N6039			80			V
Collector Cut off Current	I_{CEO}	$V_{CE}=40V, I_B=0$			100	μA
2N6034,2N6037		$V_{CE}=60V, I_B=0$			100	μA
2N6035, 2N6038		$V_{CE}=80V, I_B=0$			100	μA
2N6036, 2N6039						

SILICON POWER DARLINGTON TRANSISTORS

(PNP) 2N6034, 2N6035, 2N6036
(NPN) 2N6037, 2N6038, 2N6039

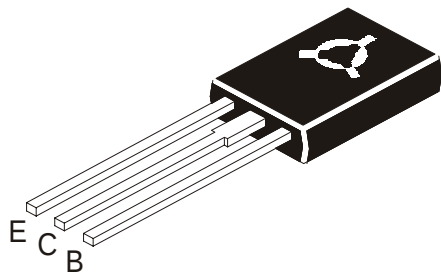


TO126
Plastic Package

DESCRIPTION		SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
	2N6034,2N6037	I _{CEX}	V _{CE} =40V,V _{BE} (off)=1.5V			100	μA
	2N6035, 2N6038		V _{CE} =60V,V _{BE} (off)=1.5V			100	μA
	2N6036, 2N6039		V _{CE} =80V,V _{BE} (off)=1.5V			100	μA
			T _C =125 ^o C				
	2N6034,2N6037		V _{CE} =40V,V _{BE} (off)=1.5V			500	μA
	2N6035, 2N6038		V _{CE} =60V,V _{BE} (off)=1.5V			500	μA
	2N6036, 2N6039		V _{CE} =80V,V _{BE} (off)=1.5V			500	μA
Collector cut off Current							
	2N6034,2N6037	I _{CBO}	V _{CB} =40, I _E =0			0.5	mA
	2N6035, 2N6038		V _{CB} =60, I _E =0			0.5	mA
	2N6036, 2N6039		V _{CB} =80, I _E =0			0.5	mA
Emitter Cut off Current							
		I _{EBO}	V _{BE} =5V,I _C =0			2.0	mA
DC Current Gain							
		h _{FE}	I _C =0.5A, V _{CE} =3V	500			
			I _C =2A, V _{CE} =3V	750		15000	
			I _C =4A, V _{CE} =3V	100			
Collector Emitter Saturation Voltage							
		V _{CE(Sat)}	I _C =2A,I _B =8mA			2.0	V
			I _C =4A,I _B =40mA			3.0	V
Base Emitter Saturation Voltage							
		V _{BE(sat)}	I _C =4A,I _B =40mA			4.0	V
Base Emitter on Voltage							
		V _{BE(on)}	I _C =2A,I _B =V _{CE} =3V			2.8	V
Dynamic Characteristics							
Small Signal Current Gain							
		I _{hfe}	I _C =0.75A,V _{CE} =10V f=1MHz	25			
Output Capacitance							
	PNP	C _{ob}	VCB=10V, IE=0, f=0.1MHz			200	pF
	NPN						100

(PNP) 2N6034, 2N6035, 2N6036
(NPN) 2N6037, 2N6038, 2N6039

TO126
Plastic Package

TO-126 (SOT-32) Plastic Package

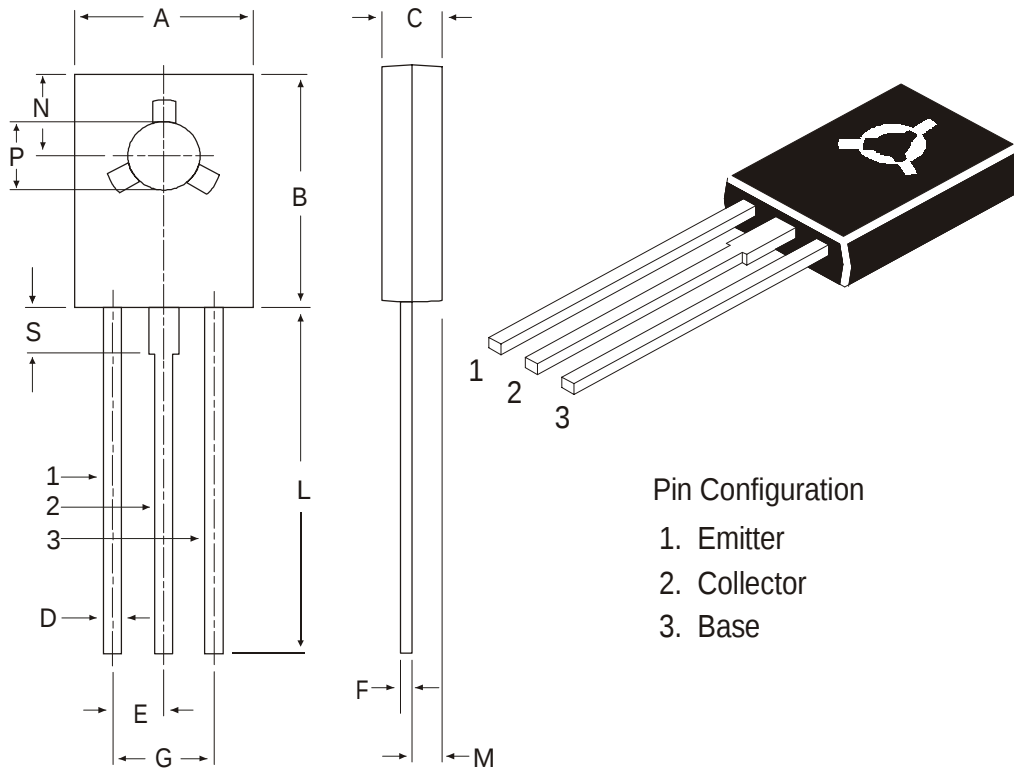

DIM	MIN	MAX
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.7	0.9
E	2.25 TYP.	
F	0.49	0.75
G	4.5 TYP.	
L	15.7 TYP.	
M	1.27 TYP.	
N	3.75 TYP.	
P	3.0	3.2
S	2.5 TYP.	

All diminsions in mm.

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-126 Bulk	500 pcs/polybag	340 gm/500 pcs	3" x 7.5" x 7.5"	2K	17" x 15" x 13.5"	32K	31 kgs
TO-126 Tube	50 pcs/tube	73 gm/50 pcs	3" x 3.7" x 21.5"	1K	19" x 19" x 19"	10K	15 kgs

TO126**Plastic Package****Disclaimer**

The product information and the selection guides facilitate selection of the CDIL's Discrete Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data sheet and on the CDIL Web Site/CD is believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Discrete Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of

Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.

Telephone + 91-11-2579 6150, 5141 1112 Fax + 91-11-2579 5290, 5141 1119

email@cdil.com www.cdilsemi.com