



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

**SF161
THRU
SF166**

TECHNICAL SPECIFICATIONS OF SUPER FAST RECTIFIER
VOLTAGE RANGE - 50 to 400 Volts CURRENT - 16 Amperes


FEATURES

- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * Super fast switching speed
- * High reliability
- * Good for switching mode circuit

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Mounting position: Any
- * Weight: 2.24 grams

TO-220

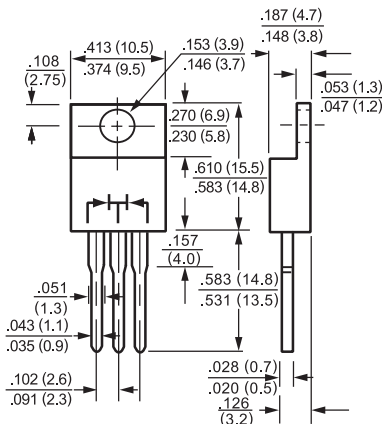

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

		SYMBOL	SF161	SF162	SF163	SF164	SF165	SF166	UNITS
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	150	200	300	400	Volts
Maximum RMS Voltage		V _{RMS}	35	70	105	140	210	280	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	150	200	300	400	Volts
Maximum Average Forward Rectified Current at T _c = 125°C		I _O	16						Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		I _{FSM}	150						Amps
Maximum Instantaneous Forward Voltage at 8.0A DC		V _F	1.0				1.35		Volts
Maximum DC Reverse Current	@T _c = 25°C	I _R	10						uAmps
at Rated DC Blocking Voltage	@T _c = 100°C		500						
Maximum Reverse Recovery Time (Note 1)		t _{rr}	35				50		nSec
Typical Thermal Resistance		R _{θJC}	3						°C/W
Typical Junction Capacitance (Note 2)		C _J	50				30		pF
Operating and Storage Temperature Range		T _J , T _{STG}	-65 to + 150						°C

NOTES : 1. Test Conditions: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.
3. Suffix "A" =Common Anode.

RATING AND CHARACTERISTIC CURVES (SF161 THRU SF166)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

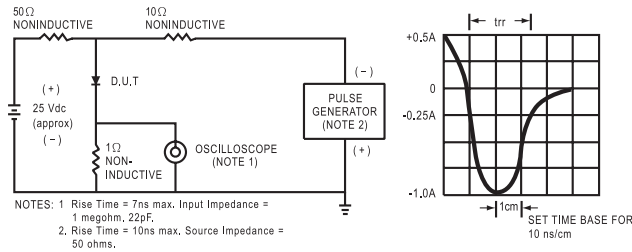


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

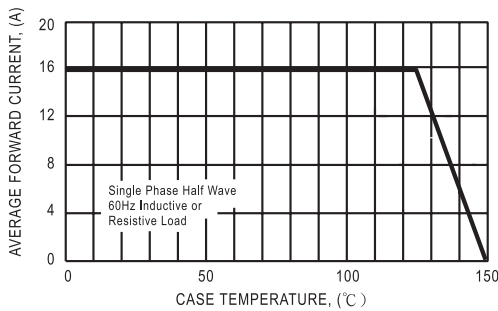


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

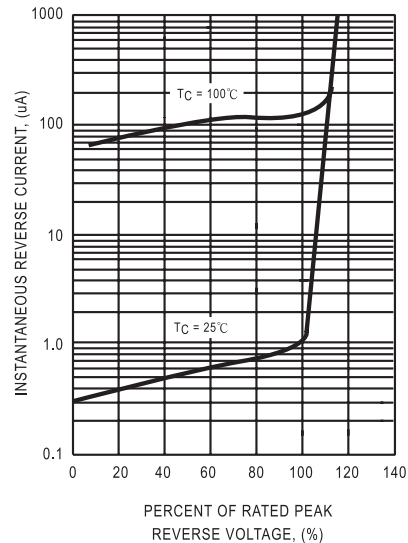


FIG. 4 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

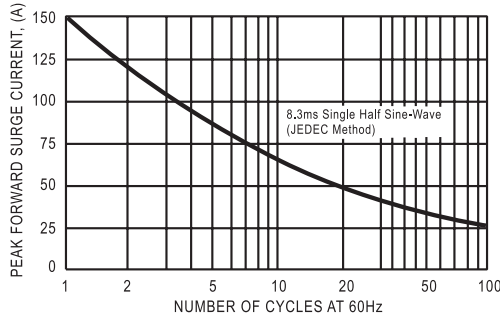


FIG. 5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


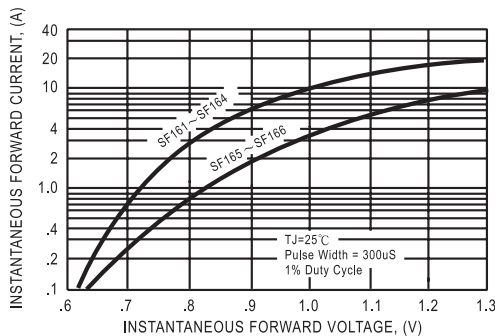


FIG. 6 - TYPICAL JUNCTION CAPACITANCE

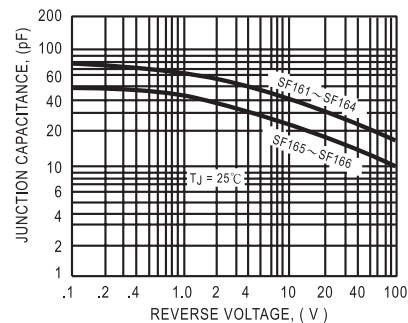

DC COMPONENTS CO., LTD.