

Standard Power MOSFETs

IRF730, IRF731, IRF732, IRF733

File Number 1580

Power MOS Field-Effect Transistors

N-Channel Enhancement-Mode Power Field-Effect Transistors

4.5A and 5.5A, 350V-400V  
 $r_{DS(on)} = 1.0 \Omega$  and  $1.5 \Omega$


Features:

- 30A is power-dissipation limited
- Nanosecond switching speeds
- Linear transfer characteristics
- High input impedance
- Majority carrier device

The IRF730, IRF731, IRF732 and IRF733 are n-channel enhancement-mode silicon-gate power field-effect transistors designed for applications such as switching regulators, switching converters, motor drivers, relay drivers, and drivers for high-power bipolar switching transistors requiring high speed and low gate-drive power. These types can be operated directly from integrated circuits.

The IRF-types are supplied in the JEDEC TO-220AB plastic package.


N-CHANNEL ENHANCEMENT MODE



92CS-33741

TERMINAL DIAGRAM

TERMINAL DESIGNATION

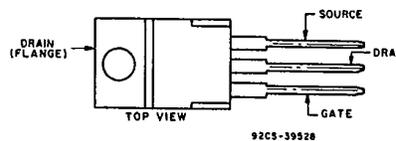

92CS-39528

JEDEC TO-220AB


Absolute Maximum Ratings

Parameter	IRF730	IRF731	IRF732	IRF733	Units
$V_{DS}$ Drain - Source Voltage (1)	400	350	400	350	V
$V_{DGS}$ Drain - Gate Voltage ( $R_{GS} = 20 \text{ k}\Omega$ ) (1)	400	350	400	350	V
$I_D @ T_C = 25^\circ\text{C}$ Continuous Drain Current	5.5	5.5	4.5	4.5	A
$I_D @ T_C = 100^\circ\text{C}$ Continuous Drain Current	3.5	3.5	3.0	3.0	A
$I_{DM}$ Pulsed Drain Current (2)	22	22	18	18	A
$V_{GS}$ Gate - Source Voltage	$\pm 20$				V
$P_D @ T_C = 25^\circ\text{C}$ Max. Power Dissipation	75 [See Fig. 14]				W
Linear Derating Factor	0.8 [See Fig. 14]				W/°C
$I_{LM}$ Inductive Current, Clamped	(See Fig. 15 and 16) $L = 100 \mu\text{H}$				A
$T_J$ Operating Junction and Storage Temperature Range	-55 to 150				°C
$T_{stg}$ Lead Temperature	300 (0.063 in. (1.6mm) from case for 10s)				°C

IRF730, IRF731, IRF732, IRF733

Electrical Characteristics @ T<sub>C</sub> = 25°C (Unless Otherwise Specified)

Parameter	Type	Min.	Typ.	Max.	Units	Test Conditions
BV <sub>DSS</sub> Drain-Source Breakdown Voltage	IRF730 IRF732	400	-	-	V	V <sub>GS</sub> = 0V
	IRF731 IRF733	350	-	-	V	I <sub>D</sub> = 250μA
V <sub>GS(th)</sub> Gate Threshold Voltage	ALL	2.0	-	4.0	V	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = 250μA
I <sub>GSS</sub> Gate-Source Leakage Forward	ALL	-	-	500	nA	V <sub>GS</sub> = 20V
I <sub>GSS</sub> Gate-Source Leakage Reverse	ALL	-	-	-500	nA	V <sub>GS</sub> = -20V
I <sub>DSS</sub> Zero Gate Voltage Drain Current	ALL	-	-	250	μA	V <sub>DS</sub> = Max. Rating, V <sub>GS</sub> = 0V
		-	-	1000	μA	V <sub>DS</sub> = Max. Rating x 0.8, V <sub>GS</sub> = 0V, T <sub>C</sub> = 125°C
I <sub>D(on)</sub> On-State Drain Current ①	IRF730 IRF731	5.5	-	-	A	V <sub>DS</sub> = I <sub>D(on)</sub> x R <sub>DS(on) max.</sub> , V <sub>GS</sub> = 10V
	IRF732 IRF733	4.5	-	-	A	
R <sub>DS(on)</sub> Static Drain-Source On-State Resistance ②	IRF730 IRF731	-	0.8	1.0	Ω	V <sub>GS</sub> = 10V, I <sub>D</sub> = 3.0A
	IRF732 IRF733	-	1.0	1.5	Ω	
g <sub>fs</sub> Forward Transconductance ③	ALL	3.0	4.0	-	S (Ω)	V <sub>DS</sub> = I <sub>D(on)</sub> x R <sub>DS(on) max.</sub> , I <sub>D</sub> = 3.0A
C <sub>iss</sub> Input Capacitance	ALL	-	600	800	pF	V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V, f = 1.0 MHz See Fig. 10
C <sub>oss</sub> Output Capacitance	ALL	-	150	300	pF	
C <sub>rss</sub> Reverse Transfer Capacitance	ALL	-	40	80	pF	
t <sub>d(on)</sub> Turn On Delay Time	ALL	-	30	30	ns	V <sub>DD</sub> = 175V, I <sub>D</sub> = 3.0A, Z <sub>θ</sub> = 15Ω See Fig. 17
t <sub>r</sub> Rise Time	ALL	-	35	35	ns	
t <sub>d(off)</sub> Turn Off Delay Time	ALL	-	55	55	ns	(MOSFET switching times are essentially independent of operating temperature.)
t <sub>f</sub> Fall Time	ALL	-	35	35	ns	
Q <sub>g</sub> Total Gate Charge (Gate-Source Plus Gate-Drain)	ALL	-	18	30	nC	V <sub>GS</sub> = 10V, I <sub>D</sub> = 7.0A, V <sub>DS</sub> = 0.8 Max. Rating. See Fig. 18 for test circuit. (Gate charge is essentially independent of operating temperature.)
Q <sub>gs</sub> Gate-Source Charge	ALL	-	11	-	nC	
Q <sub>gd</sub> Gate-Drain ("Miller") Charge	ALL	-	7.0	-	nC	
L <sub>D</sub> Internal Drain Inductance		-	3.5	-	nH	Measured from the contact screw on tab to center of die.
	ALL	-	4.5	-	nH	
L <sub>S</sub> Internal Source Inductance	ALL	-	7.5	-	nH	Measured from the source lead, 6mm (0.25 in.) from package to source bonding pad.



Thermal Resistance

R <sub>thJC</sub> Junction-to-Case	ALL	-	-	1.67	°C/W
R <sub>thCS</sub> Case to Sink	ALL	-	1.0	-	°C/W
R <sub>thJA</sub> Junction to Ambient	ALL	-	-	80	°C/W

Source-Drain Diode Ratings and Characteristics

I <sub>S</sub> Continuous Source Current (Body Diode)	IRF730 IRF731	-	-	5.5	A	Modified MOSFET symbol showing the integral reverse P-N junction rectifier.
	IRF732 IRF733	-	-	4.5	A	
I <sub>SM</sub> Pulse Source Current (Body Diode) ③	IRF730 IRF731	-	-	22	A	
	IRF732 IRF733	-	-	18	A	
V <sub>SD</sub> Diode Forward Voltage ④	IRF730 IRF731	-	-	1.6	V	T <sub>C</sub> = 25°C, I <sub>S</sub> = 5.5A, V <sub>GS</sub> = 0V
	IRF732 IRF733	-	-	1.5	V	T <sub>C</sub> = 25°C, I <sub>S</sub> = 4.5A, V <sub>GS</sub> = 0V
t <sub>rr</sub> Reverse Recovery Time	ALL	-	600	-	ns	T <sub>J</sub> = 150°C, I <sub>F</sub> = 5.5A, di <sub>F</sub> /dt = 100 A/μs
Q <sub>RR</sub> Reverse Recovered Charge	ALL	-	4.0	-	μC	T <sub>J</sub> = 150°C, I <sub>F</sub> = 5.5A, di <sub>F</sub> /dt = 100 A/μs
t <sub>on</sub> Forward Turn on Time	ALL	Intrinsic turn on time is negligible. Turn on speed is substantially controlled by L <sub>S</sub> + L <sub>D</sub>				

① T<sub>J</sub> = 25°C to 150°C. ② Pulse Test: Pulse width < 300μs, Duty Cycle < 2% ③ Repetitive Rating: Pulse width limited by max. junction temperature. See Transient Thermal Impedance Curve (Fig. 5).

IRF730, IRF731, IRF732, IRF733

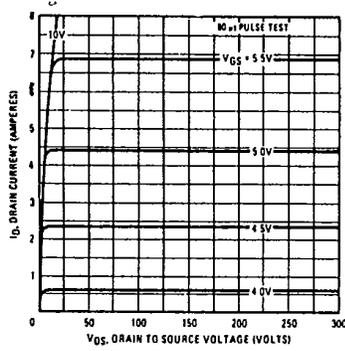


Fig. 1 - Typical Output Characteristics




Fig. 2 - Typical Transfer Characteristics




Fig. 3 - Typical Saturation Characteristics

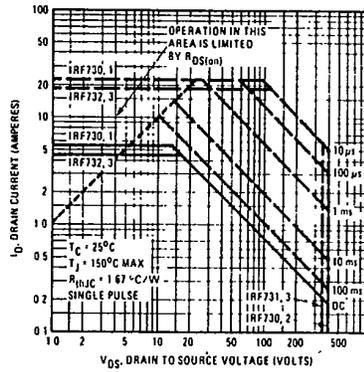


Fig. 4 - Maximum Safe Operating Area

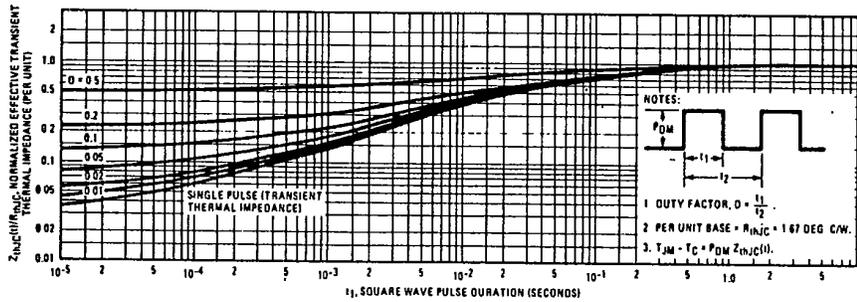


Fig. 5 - Maximum Effective Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration

IRF730, IRF731, IRF732, IRF733

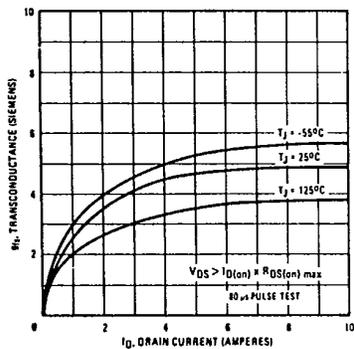


Fig. 6 - Typical Transconductance Vs. Drain Current

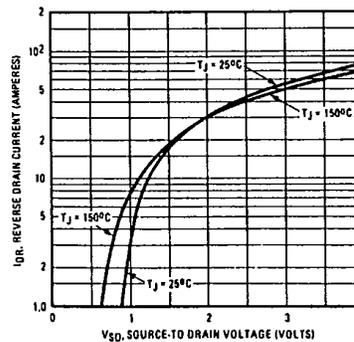


Fig. 7 - Typical Source-Drain Diode Forward Voltage

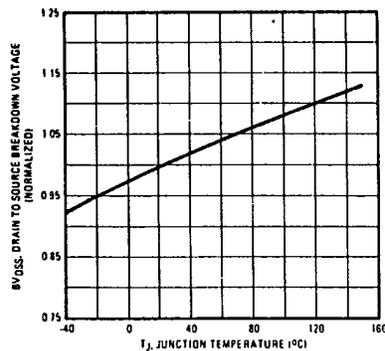


Fig. 8 - Breakdown Voltage Vs. Temperature




Fig. 9 - Normalized On-Resistance Vs. Temperature




Fig. 10 - Typical Capacitance Vs. Drain-to-Source Voltage

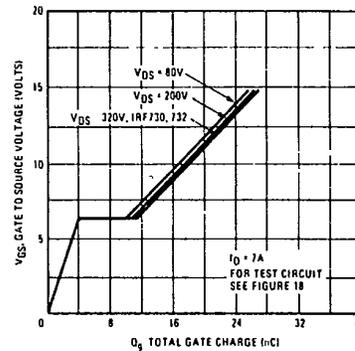


Fig. 11 - Typical Gate Charge Vs. Gate-to-Source Voltage

IRF730, IRF731, IRF732, IRF733

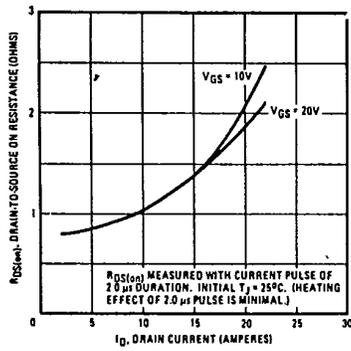


Fig. 12 - Typical On-Resistance Vs. Drain Current

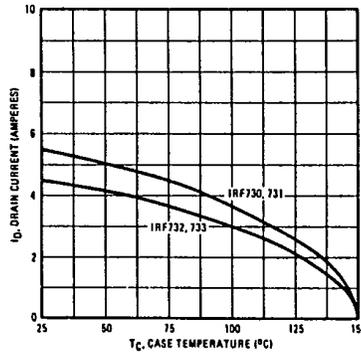


Fig. 13 - Maximum Drain Current Vs. Case Temperature




Fig. 14 - Power Vs. Temperature Derating Curve




Fig. 15 - Clamped Inductive Test Circuit




Fig. 16 - Clamped Inductive Waveforms




Fig. 17 - Switching Time Test Circuit

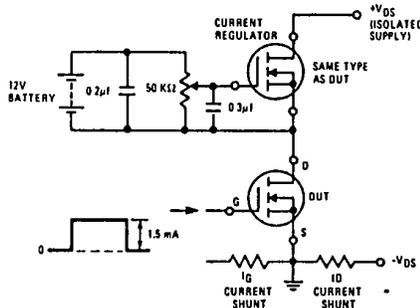


Fig. 18 - Gate Charge Test Circuit