



# FR101(L)G THRU FR107(L)G

1.0 AMP. GLASS PASSIVATED FAST RECOVERY RECTIFIERS

## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability


## MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V – 0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL – STD – 202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any
- \* Weight: 0.34 grams (0.22 grams A – 405)


## VOLTAGE RANGE

50 to 1000 Volts  
CURRENT  
1.0 Amperes

### DO-41

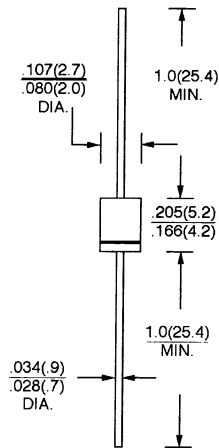

### A-405

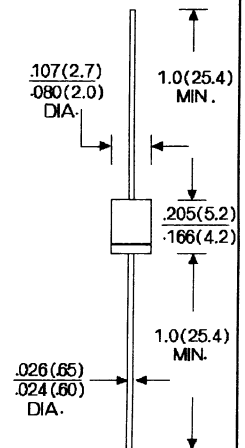

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

| TYPE NUMBER                                                                                                     | SYMBOLS                           | FR<br>101(L)G | FR<br>102(L)G | FR<br>103(L)G | FR<br>104(L)G | FR<br>105(L)G | FR<br>106(L)G | FR<br>107(L)G | UNITS    |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|----------|
| Maximum Recurrent Peak Reverse Voltage                                                                          | V <sub>RRM</sub>                  | 50            | 100           | 200           | 400           | 600           | 800           | 1000          | V        |
| Maximum RMS Voltage                                                                                             | V <sub>RMS</sub>                  | 35            | 70            | 140           | 280           | 420           | 560           | 700           | V        |
| Maximum D. C Blocking Voltage                                                                                   | V <sub>DC</sub>                   | 50            | 100           | 200           | 400           | 600           | 800           | 1000          | V        |
| Maximum Average Forward Rectified Current<br>.375"(9.5mm) lead length @ T <sub>A</sub> = 55°C                   | I <sub>F(AV)</sub>                | 1.0           |               |               |               |               |               |               | A        |
| Peak Forward Surge Current, 8.3 ms single half sine-wave<br>superimposed on rated load (JEDEC method)           | I <sub>FSM</sub>                  | 30            |               |               |               |               |               |               | A        |
| Maximum Instantaneous Forward Voltage at 1.0A                                                                   | V <sub>F</sub>                    | 1.3           |               |               |               |               |               |               | V        |
| Maximum D. C Reverse Current @ T <sub>A</sub> = 25°C<br>at Rated D. C Blocking Voltage @ T <sub>A</sub> = 125°C | I <sub>R</sub>                    | 5.0<br>100    |               |               |               |               |               |               | μA<br>μA |
| Maximum Reverse Recovery Time(Note1)                                                                            | T <sub>RR</sub>                   | 150           |               |               |               | 250           | 500           |               | nS       |
| Typical Junction Capacitance (Note 2)                                                                           | C <sub>J</sub>                    | 15            |               |               |               |               |               |               | pF       |
| Operating and Storage Temperature Range                                                                         | T <sub>J</sub> , T <sub>STG</sub> | - 65 to + 150 |               |               |               |               |               |               | °C       |

NOTES: 1. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .

2. Measured at 1 MHz and applied reverse voltage of 4.0V D.C.

## RATINGS AND CHARACTERISTIC CURVES (FR101(L)G THRU FR107(L)G)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

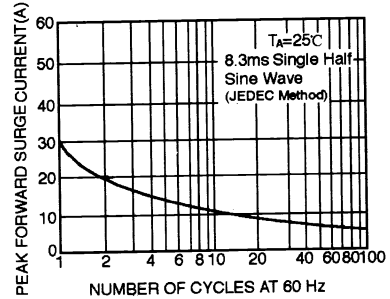


FIG. 3 - TYPICAL FORWARD CHARACTERISTICS

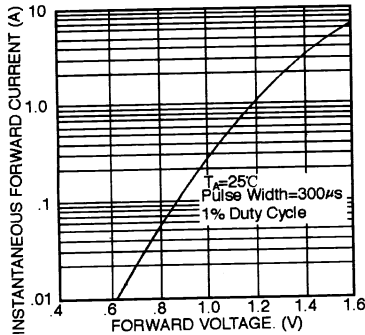


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

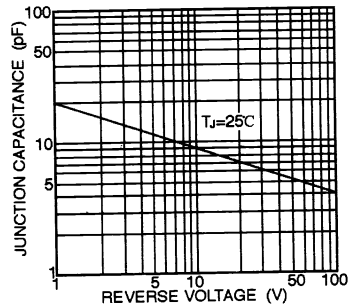


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

