



KBPC800 THRU KBPC810

SINGLE PHASE 8.0 AMPS SILICON BRIDGE RECTIFIERS




FEATURES

- * Surge overload rating 200 amperes peak
- * Low forward voltage drop
- * Small size, simple installation

VOLTAGE RANGE
50 to 1000 Volts
CURRENT
8.0 Amperes

KBPC-8/10

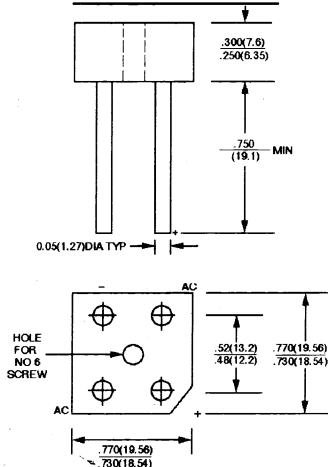

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	KBPC 800	KBPC 801	KBPC 802	KBPC 804	KBPC 806	KBPC 808	KBPC 810	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D.C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_C = 50^\circ\text{C}$ (1,2)	$I_{F(AV)}$	8.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	250							A
Maximum Forward Voltage Drop per element @ 4.0A	V_F	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^\circ\text{C}$ D.C. Blocking Voltage per element @ $T_A = 100^\circ\text{C}$	I_R	10.0 500							μA μA
Operating Temperature Range	T_J	-55 to +125							°C
Storage Temperature Range	T_{STG}	-55 to +150							°C

NOTE:(1) Bolt down on heat - sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with # 6 screw

(2) Unit mounted on 5.5 x 6.0 x 0.11" thick(14 x 15 x 0.3cm) Al. Plate

RATINGS AND CHARACTERISTIC CURVES (KBPC800 THRU KBPC810)

FIG.1 - MAXIMUM NON - REPETITIVE FORWARD SURGE CURRENT - PER ELEMENT

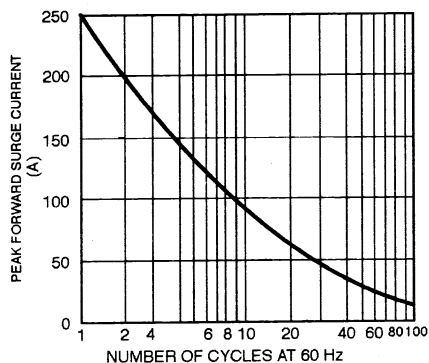


FIG.2 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

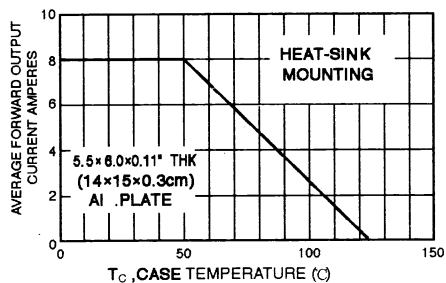


FIG.3 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

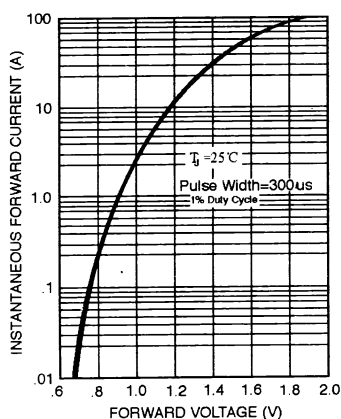


FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER ELEMENT

