



# MUR405 THRU MUR460

## 4.0 AMP. ULTRA FAST RECTIFIERS

### FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Ultra fast 25,50 Nanosecond Recovery Times


### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V - 0 rate flame retardant
- \* Lead and Mounting Surface Temperature for soldering Purposes 220°C Max for 10 Seconds  
1/16" from case
- \* Polarity: Color band denotes cathode end
- \* Mounting Position: Any
- \* Weight: 1.18 grams

### VOLTAGE RANGE

50 to 600 Volts  
CURRENT  
4.0 Amperes

### DO-201AD

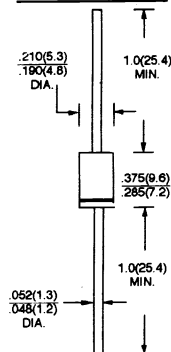

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

| TYPE NUMBER                                                                                                           | SYMBOLS         | MUR 405                        | MUR 410 | MUR 415 | MUR 420                        | MUR 440 | MUR 460 | UNITS                          |
|-----------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------------|---------|---------|--------------------------------|---------|---------|--------------------------------|
| Maximum Recurrent Peak Reverse Voltage                                                                                | $V_{RRM}$       | 50                             | 100     | 150     | 200                            | 400     | 600     |                                |
| Maximum RMS Voltage                                                                                                   | $V_{RMS}$       | 35                             | 70      | 105     | 140                            | 280     | 420     | V                              |
| Maximum D. C Blocking Voltage                                                                                         | $V_{DC}$        | 50                             | 100     | 150     | 200                            | 400     | 600     | V                              |
| Maximum Average Forward Rectified Current See fig. 1                                                                  | $I_{F(AV)}$     | 4.0 @ $T_A = 80^\circ\text{C}$ |         |         | 4.0 @ $T_A = 40^\circ\text{C}$ |         |         | A                              |
| Peak Forward Surge Current, 8.3 ms single half sine - wave super-imposed on rated load (JEDEC method)                 | $I_{FSM}$       | 125                            |         |         | 70                             |         |         | A                              |
| Maximum Instantaneous Forward Voltage 4.0A @ $T_J = 25^\circ\text{C}$ (Note 1)                                        | $V_F$           | 1.0                            |         |         | 1.28                           |         |         | V                              |
| Maximum D. C Reverse Current @ $T_A = 25^\circ\text{C}$<br>At Rated D. C Blocking Voltage @ $T_A = 150^\circ\text{C}$ | $I_R$           | 5.0<br>150                     |         |         | 10<br>250                      |         |         | $\mu\text{A}$<br>$\mu\text{A}$ |
| Maximum Reverse Recovery Time (Note 2)                                                                                | $T_{RR}$        | 25                             |         |         | 50                             |         |         | nS                             |
| Typical Junction Capacitance (Note 3)                                                                                 | $C_J$           | 65                             |         |         |                                |         |         | pF                             |
| Typical Thermal Resistance Junction to Ambient (Note 4)                                                               | $R_{\theta JA}$ | 28                             |         |         |                                |         |         | $^\circ\text{C/W}$             |
| Operation Temperature Range                                                                                           | $T_J, T_{STG}$  | - 65 to + 150                  |         |         |                                |         |         | $^\circ\text{C}$               |

- NOTES: 1. Pulse test:  $t_p = 300\mu\text{s}$ , duty cycle  $\leq 2\%$   
2. Reverse Recovery Test Conditions:  $I_F = 0.5\text{A}$ ,  $I_R = 1.0\text{A}$ ,  $I_{RR} = 0.25\text{A}$ .  
3. Measured at 1 MHz and applied reverse voltage of 4.0V D. C.  
4. Lead length = 1/2" on P. C. Board with 1.5" x 1.5" copper surface

## RATINGS AND CHARACTERISTIC CURVES

### MUR405 THRU MUR460

FIG. 1 - FORWARD CURRENT DERATING CURVE

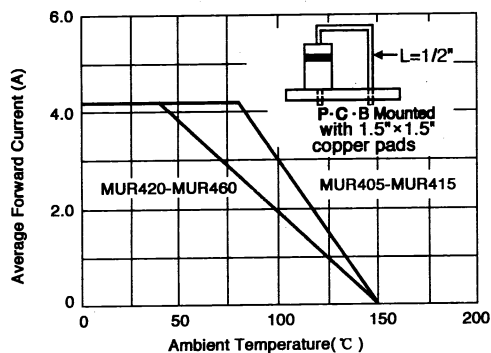


FIG. 4 - TYPICAL FORWARD VOLTAGE

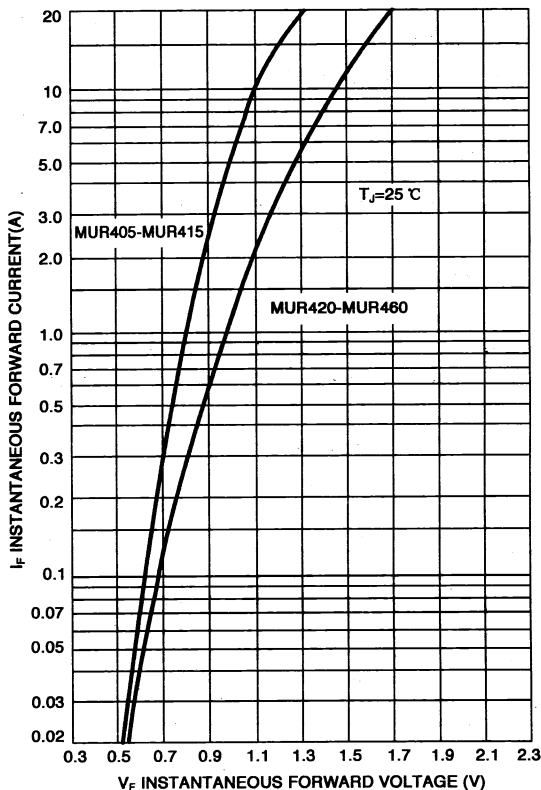


FIG. 2 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS

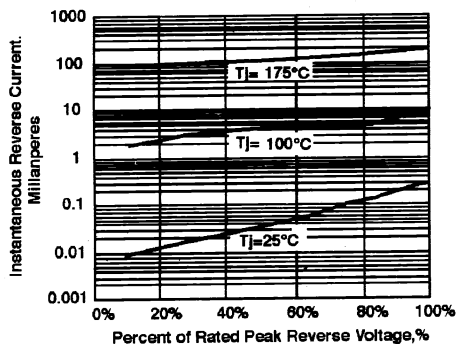


FIG. 3 - TYPICAL JUNCTION CAPACITANCE - PER LEG

