

## 74LCX373

# Low Voltage Octal Transparent Latch with 5V Tolerant Inputs and Outputs

### General Description

The LCX373 consists of eight latches with 3-STATE outputs for bus organized system applications. The device is designed for low voltage (3.3V or 2.5V)  $V_{CC}$  applications with capability of interfacing to a 5V signal environment.

The LCX373 is fabricated with an advanced CMOS technology to achieve high speed operation while maintaining CMOS low power dissipation.

### Features

- 5V tolerant inputs and outputs
- 2.3V–3.6V  $V_{CC}$  specifications provided
- 8.0 ns  $t_{PD}$  max ( $V_{CC} = 3.3V$ ), 10  $\mu A$   $I_{CC}$  max
- Power-down high impedance inputs and outputs
- Supports live insertion/withdrawal (Note 1)
- $\pm 24$  mA output drive ( $V_{CC} = 3.0V$ )
- Implements patented noise/EMI reduction circuitry
- Latch-up performance exceeds 500 mA
- ESD performance:

Human Body Model > 2000V

Machine Model > 200V


**Note 1:** To ensure the high-impedance state during power up or down,  $\overline{OE}$  should be tied to  $V_{CC}$  through a pull-up resistor; the minimum value or the resistor is determined by the current-sourcing capability of the driver.

### Ordering Code:


| Order Number | Package Number | Package Description                                                         |
|--------------|----------------|-----------------------------------------------------------------------------|
| 74LCX373WM   | M20B           | 20-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300" Wide  |
| 74LCX373SJ   | M20D           | 20-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide               |
| 74LCX373MSA  | MSA20          | 20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide       |
| 74LCX373MTC  | MTC20          | 20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide |

Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

### Logic Symbols

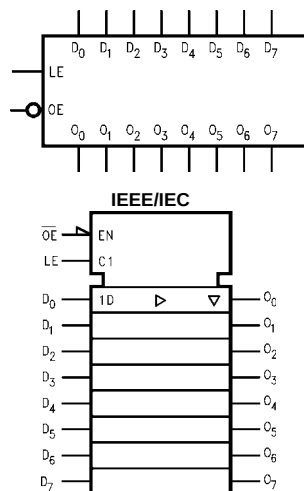

### Connection Diagram



## Pin Descriptions

| Pin Names                      | Description           |
|--------------------------------|-----------------------|
| D <sub>0</sub> –D <sub>7</sub> | Data Inputs           |
| LE                             | Latch Enable Input    |
| $\overline{OE}$                | Output Enable Input   |
| O <sub>0</sub> –O <sub>7</sub> | 3-STATE Latch Outputs |

## Truth Table

| Inputs |                 |                | Outputs        |
|--------|-----------------|----------------|----------------|
| LE     | $\overline{OE}$ | D <sub>n</sub> | O <sub>n</sub> |
| X      | H               | X              | Z              |
| H      | L               | L              | L              |
| H      | L               | H              | H              |
| L      | L               | X              | O <sub>0</sub> |

H = HIGH Voltage Level

L = LOW Voltage Level

Z = High Impedance

X = Immaterial


O<sub>0</sub> = Previous O<sub>0</sub> before HIGH-to-LOW transition of Latch Enable

## Functional Description

The LCX373 contains eight D-type latches with 3-STATE standard outputs. When the Latch Enable (LE) input is HIGH, data on the D<sub>n</sub> inputs enters the latches. In this condition the latches are transparent, i.e. a latch output will change state each time its D input changes. When LE is LOW, the latches store the information that was present on the D inputs a setup time preceding the HIGH-to-LOW tran-

sition of LE. The 3-STATE standard outputs are controlled by the Output Enable ( $\overline{OE}$ ) input. When  $\overline{OE}$  is LOW, the standard outputs are in the 2-state mode. When  $\overline{OE}$  is HIGH, the standard outputs are in the high impedance mode but this does not interfere with entering new data into the latches.

## Logic Diagram

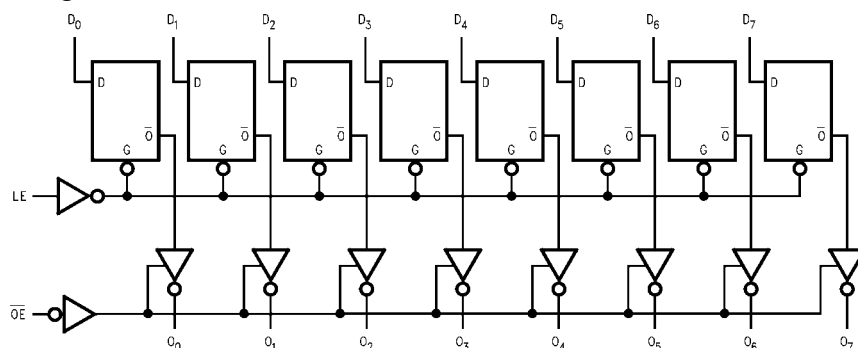

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

| Absolute Maximum Ratings <sup>(Note 2)</sup> |                                  |                                               |                                                           |       |
|----------------------------------------------|----------------------------------|-----------------------------------------------|-----------------------------------------------------------|-------|
| Symbol                                       | Parameter                        | Value                                         | Conditions                                                | Units |
| V <sub>CC</sub>                              | Supply Voltage                   | −0.5 to +7.0                                  |                                                           | V     |
| V <sub>I</sub>                               | DC Input Voltage                 | −0.5 to +7.0                                  |                                                           | V     |
| V <sub>O</sub>                               | DC Output Voltage                | −0.5 to +7.0<br>−0.5 to V <sub>CC</sub> + 0.5 | Output in 3-STATE<br>Output in HIGH or LOW State (Note 3) | V     |
| I <sub>IK</sub>                              | DC Input Diode Current           | −50                                           | V <sub>I</sub> < GND                                      | mA    |
| I <sub>OK</sub>                              | DC Output Diode Current          | −50<br>+50                                    | V <sub>O</sub> < GND<br>V <sub>O</sub> > V <sub>CC</sub>  | mA    |
| I <sub>O</sub>                               | DC Output Source/Sink Current    | ±50                                           |                                                           | mA    |
| I <sub>CC</sub>                              | DC Supply Current per Supply Pin | ±100                                          |                                                           | mA    |
| I <sub>GND</sub>                             | DC Ground Current per Ground Pin | ±100                                          |                                                           | mA    |
| T <sub>STG</sub>                             | Storage Temperature              | −65 to +150                                   |                                                           | °C    |

Recommended Operating Conditions <sup>(Note 4)</sup>

| Symbol          | Parameter                        | Min                                                                    | Max                                                                                             | Units                  |      |    |
|-----------------|----------------------------------|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------|------|----|
| V <sub>CC</sub> | Supply Voltage                   | Operating<br>Data Retention                                            | 2.0<br>1.5                                                                                      | 3.6<br>3.6             | V    |    |
|                 | V <sub>I</sub>                   | Input Voltage                                                          | 0                                                                                               | 5.5                    |      | V  |
| V <sub>O</sub>  | Output Voltage                   | HIGH or LOW State<br>3-STATE                                           | 0<br>0                                                                                          | V <sub>CC</sub><br>5.5 | V    |    |
|                 | I <sub>OH</sub> /I <sub>OL</sub> | Output Current                                                         | V <sub>CC</sub> = 3.0V – 3.6V<br>V <sub>CC</sub> = 2.7V – 3.0V<br>V <sub>CC</sub> = 2.3V – 2.7V | ±24<br>±12<br>±8       |      | mA |
| T <sub>A</sub>  |                                  | Free-Air Operating Temperature                                         | −40                                                                                             | 85                     | °C   |    |
| Δt/ΔV           |                                  | Input Edge Rate, V <sub>IN</sub> = 0.8V – 2.0V, V <sub>CC</sub> = 3.0V | 0                                                                                               | 10                     | ns/V |    |

Note 2: The Absolute Maximum Ratings are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the Absolute Maximum Ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Note 3: I<sub>O</sub> Absolute Maximum Rating must be observed.

Note 4: Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

| Symbol           | Parameter                 | Conditions                                                                       | V <sub>CC</sub><br>(V) | T <sub>A</sub> = −40°C to +85°C |      | Units |
|------------------|---------------------------|----------------------------------------------------------------------------------|------------------------|---------------------------------|------|-------|
|                  |                           |                                                                                  |                        | Min                             | Max  |       |
| V <sub>IH</sub>  | HIGH Level Input Voltage  |                                                                                  | 2.3 – 2.7              | 1.7                             |      | V     |
|                  |                           |                                                                                  | 2.7 – 3.6              | 2.0                             |      |       |
| V <sub>IL</sub>  | LOW Level Input Voltage   |                                                                                  | 2.3 – 2.7              |                                 | 0.7  | V     |
|                  |                           |                                                                                  | 2.7 – 3.6              |                                 | 0.8  |       |
| V <sub>OH</sub>  | HIGH Level Output Voltage | I <sub>OH</sub> = −100 μA                                                        | 2.3 – 3.6              | V <sub>CC</sub> − 0.2           |      | V     |
|                  |                           | I <sub>OH</sub> = −8 mA                                                          | 2.3                    | 1.8                             |      |       |
|                  |                           | I <sub>OH</sub> = −12 mA                                                         | 2.7                    | 2.2                             |      |       |
|                  |                           | I <sub>OH</sub> = −18 mA                                                         | 3.0                    | 2.4                             |      |       |
|                  |                           | I <sub>OH</sub> = −24 mA                                                         | 3.0                    | 2.2                             |      |       |
| V <sub>OL</sub>  | LOW Level Output Voltage  | I <sub>OL</sub> = 100 μA                                                         | 2.3 – 3.6              |                                 | 0.2  | V     |
|                  |                           | I <sub>OL</sub> = 8 mA                                                           | 2.3                    |                                 | 0.6  |       |
|                  |                           | I <sub>OL</sub> = 12 mA                                                          | 2.7                    |                                 | 0.4  |       |
|                  |                           | I <sub>OL</sub> = 16 mA                                                          | 3.0                    |                                 | 0.4  |       |
|                  |                           | I <sub>OL</sub> = 24 mA                                                          | 3.0                    |                                 | 0.55 |       |
| I <sub>I</sub>   | Input Leakage Current     | 0 ≤ V <sub>I</sub> ≤ 5.5V                                                        | 2.3 – 3.6              |                                 | ±5.0 | μA    |
| I <sub>OZ</sub>  | 3-STATE Output Leakage    | 0 ≤ V <sub>O</sub> ≤ 5.5V<br>V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> | 2.3 – 3.6              |                                 | ±5.0 | μA    |
| I <sub>OFF</sub> | Power-Off Leakage Current | V <sub>I</sub> or V <sub>O</sub> = 5.5V                                          | 0                      |                                 | 10   | μA    |

## DC Electrical Characteristics (Continued)

| Symbol           | Parameter                             | Conditions                                             | V <sub>CC</sub><br>(V) | T <sub>A</sub> = -40°C to +85°C |     | Units |
|------------------|---------------------------------------|--------------------------------------------------------|------------------------|---------------------------------|-----|-------|
|                  |                                       |                                                        |                        | Min                             | Max |       |
| I <sub>CC</sub>  | Quiescent Supply Current              | V <sub>I</sub> = V <sub>CC</sub> or GND                | 2.3 – 3.6              |                                 | 10  | μA    |
|                  |                                       | 3.6V ≤ V <sub>I</sub> , V <sub>O</sub> ≤ 5.5V (Note 5) | 2.3 – 3.6              |                                 | ±10 |       |
| ΔI <sub>CC</sub> | Increase in I <sub>CC</sub> per Input | V <sub>IH</sub> = V <sub>CC</sub> – 0.6V               | 2.3 – 3.6              |                                 | 500 | μA    |

**Note 5:** Outputs disabled or 3-STATE only.

## AC Electrical Characteristics

| Symbol            | Parameter                        | T <sub>A</sub> = -40°C to +85°C, R <sub>L</sub> = 500Ω |     |                        |     |                               |      | Units |
|-------------------|----------------------------------|--------------------------------------------------------|-----|------------------------|-----|-------------------------------|------|-------|
|                   |                                  | V <sub>CC</sub> = 3.3V ± 0.3V                          |     | V <sub>CC</sub> = 2.7V |     | V <sub>CC</sub> = 2.5V ± 0.2V |      |       |
|                   |                                  | C <sub>L</sub> = 50pF                                  |     | C <sub>L</sub> = 50pF  |     | C <sub>L</sub> = 30pF         |      |       |
|                   |                                  | Min                                                    | Max | Min                    | Max | Min                           | Max  |       |
| t <sub>PHL</sub>  | Propagation Delay                | 1.5                                                    | 8.0 | 1.5                    | 9.0 | 1.5                           | 9.6  | ns    |
| t <sub>PLH</sub>  | D <sub>n</sub> to O <sub>n</sub> | 1.5                                                    | 8.0 | 1.5                    | 9.0 | 1.5                           | 9.6  |       |
| t <sub>PHL</sub>  | Propagation Delay                | 1.5                                                    | 8.5 | 1.5                    | 9.5 | 1.5                           | 10.5 | ns    |
| t <sub>PLH</sub>  | LE to O <sub>n</sub>             | 1.5                                                    | 8.5 | 1.5                    | 9.5 | 1.5                           | 10.5 |       |
| t <sub>PZL</sub>  | Output Enable Time               | 1.5                                                    | 8.5 | 1.5                    | 9.5 | 1.5                           | 10.5 | ns    |
| t <sub>PZH</sub>  |                                  | 1.5                                                    | 8.5 | 1.5                    | 9.5 | 1.5                           | 10.5 |       |
| t <sub>PLZ</sub>  | Output Disable Time              | 1.5                                                    | 7.5 | 1.5                    | 8.5 | 1.5                           | 9.0  | ns    |
| t <sub>PHZ</sub>  |                                  | 1.5                                                    | 7.5 | 1.5                    | 8.5 | 1.5                           | 9.0  |       |
| t <sub>S</sub>    | Setup Time, D <sub>n</sub> to LE | 2.5                                                    |     | 2.5                    |     | 4.0                           |      | ns    |
| t <sub>H</sub>    | Hold Time, D <sub>n</sub> to LE  | 1.5                                                    |     | 1.5                    |     | 2.0                           |      | ns    |
| t <sub>W</sub>    | LE Pulse Width                   | 3.3                                                    |     | 3.3                    |     | 4.0                           |      | ns    |
| t <sub>OSHL</sub> | Output to Output Skew            |                                                        | 1.0 |                        |     |                               |      | ns    |
| t <sub>OSLH</sub> | (Note 6)                         |                                                        | 1.0 |                        |     |                               |      |       |


**Note 6:** Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW (t<sub>OSHL</sub>) or LOW-to-HIGH (t<sub>OSLH</sub>).

## Dynamic Switching Characteristics







| Symbol           | Parameter                                   | Conditions                                                           | V <sub>CC</sub><br>(V) | T <sub>A</sub> = 25°C | Units |
|------------------|---------------------------------------------|----------------------------------------------------------------------|------------------------|-----------------------|-------|
|                  |                                             |                                                                      |                        | Typical               |       |
| V <sub>OLP</sub> | Quiet Output Dynamic Peak V <sub>OL</sub>   | C <sub>L</sub> = 50 pF, V <sub>IH</sub> = 3.3V, V <sub>IL</sub> = 0V | 3.3                    | 0.8                   | V     |
|                  |                                             | C <sub>L</sub> = 30pF, V <sub>I</sub> = 2.5V, V <sub>IL</sub> = 0V   | 2.5                    | 0.6                   |       |
| V <sub>OLV</sub> | Quiet Output Dynamic Valley V <sub>OL</sub> | C <sub>L</sub> = 50 pF, V <sub>IH</sub> = 3.3V, V <sub>IL</sub> = 0V | 3.3                    | -0.8                  | V     |
|                  |                                             | C <sub>L</sub> = 30pF, V <sub>I</sub> = 2.5V, V <sub>IL</sub> = 0V   | 2.5                    | -0.6                  |       |

## Capacitance

| Symbol           | Parameter                     | Conditions                                                                  | Typical | Units |
|------------------|-------------------------------|-----------------------------------------------------------------------------|---------|-------|
| C <sub>IN</sub>  | Input Capacitance             | V <sub>CC</sub> = Open, V <sub>I</sub> = 0V or V <sub>CC</sub>              | 7       | pF    |
| C <sub>OUT</sub> | Output Capacitance            | V <sub>CC</sub> = 3.3V, V <sub>I</sub> = 0V or V <sub>CC</sub>              | 8       | pF    |
| C <sub>PD</sub>  | Power Dissipation Capacitance | V <sub>CC</sub> = 3.3V, V <sub>I</sub> = 0V or V <sub>CC</sub> , f = 10 MHz | 25      | pF    |

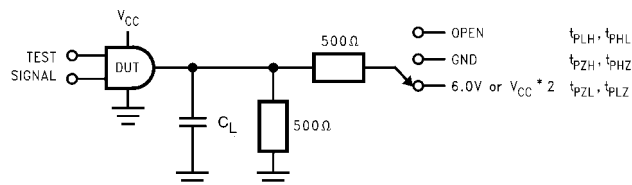
**AC LOADING and WAVEFORMS** Generic for LCX Family**FIGURE 1. AC Test Circuit ( $C_L$  includes probe and jig capacitance)**



| Test               | Switch                                                                        |
|--------------------|-------------------------------------------------------------------------------|
| $t_{PLH}, t_{PHL}$ | Open                                                                          |
| $t_{PZL}, t_{PLZ}$ | 6V at $V_{CC} = 3.3 \pm 0.3V$<br>$V_{CC} \times 2$ at $V_{CC} = 2.5 \pm 0.2V$ |
| $t_{PZH}, t_{PHZ}$ | GND                                                                           |

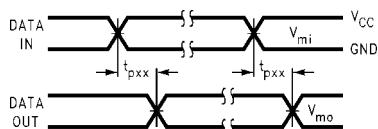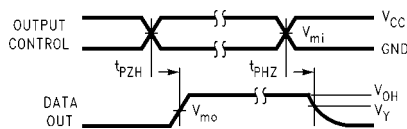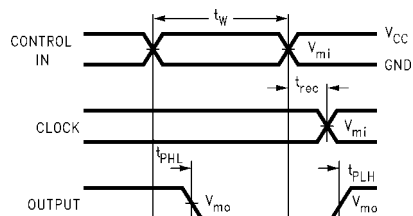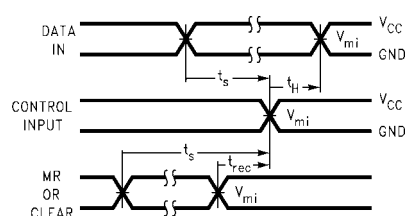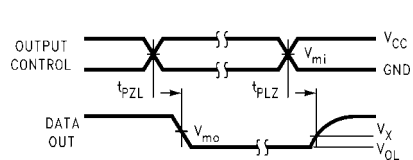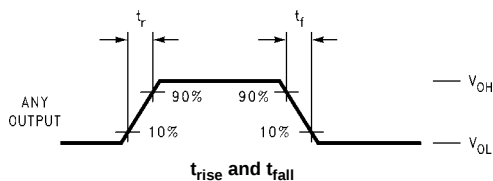**Waveform for Inverting and Non-Inverting Functions****3-STATE Output High Enable and Disable Times for Logic****Propagation Delay, Pulse Width and  $t_{rec}$  Waveforms****Setup Time, Hold Time and Recovery Time for Logic****3-STATE Output Low Enable and Disable Times for Logic****FIGURE 2. Waveforms**  
(Input Characteristics;  $f = 1MHz$ ,  $t_R = t_F = 3ns$ )


| Symbol   | $V_{CC}$        |                 |                  |
|----------|-----------------|-----------------|------------------|
|          | $3.3V \pm 0.3V$ | $2.7V$          | $2.5V \pm 0.2V$  |
| $V_{mi}$ | 1.5V            | 1.5V            | $V_{CC}/2$       |
| $V_{mo}$ | 1.5V            | 1.5V            | $V_{CC}/2$       |
| $V_x$    | $V_{OL} + 0.3V$ | $V_{OL} + 0.3V$ | $V_{OL} + 0.15V$ |
| $V_y$    | $V_{OH} - 0.3V$ | $V_{OH} - 0.3V$ | $V_{OH} - 0.15V$ |

# Schematic Diagram Generic for LCX Family

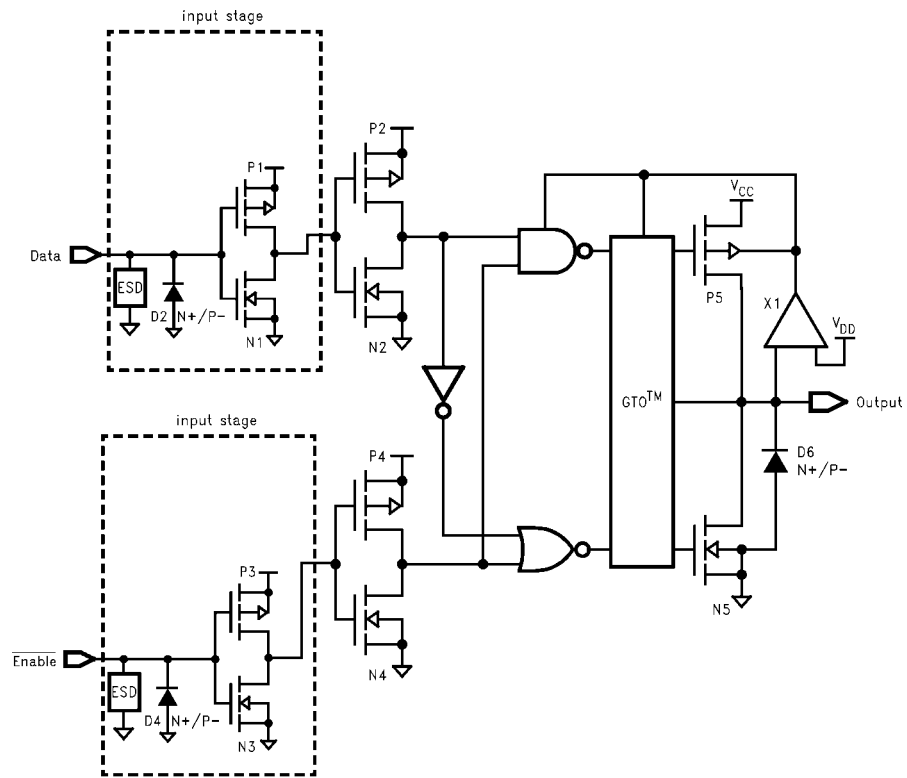





# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

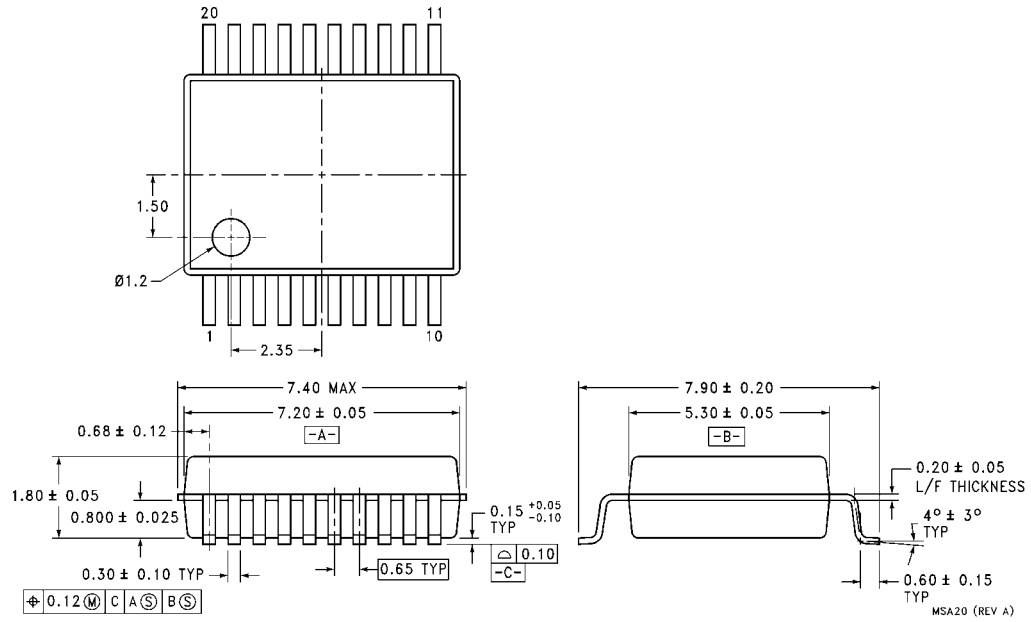

**20-Lead Shrink Small Outline Package (SSOP), EIAJ TYPE II, 5.3mm Wide  
Package Number MSA20**


# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

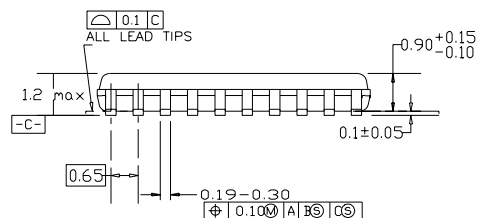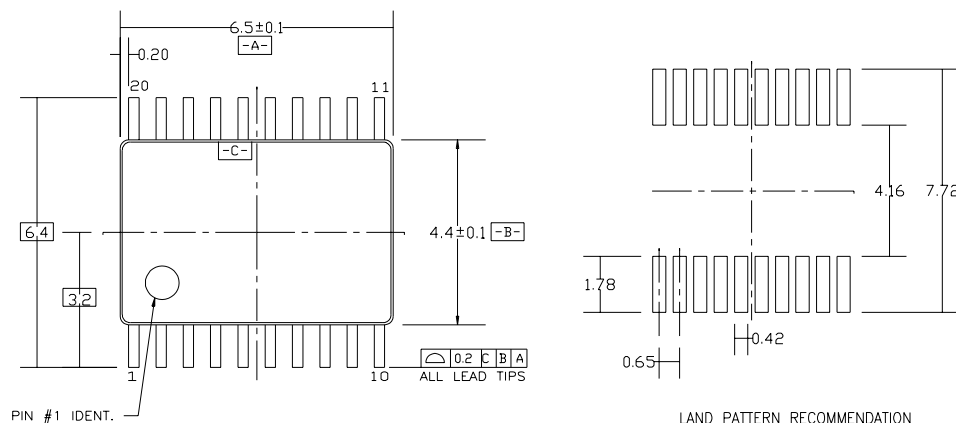

DIMENSIONS ARE IN MILLIMETERS

## NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION AC, REF NOTE 6, DATE 7/93.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLDS FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

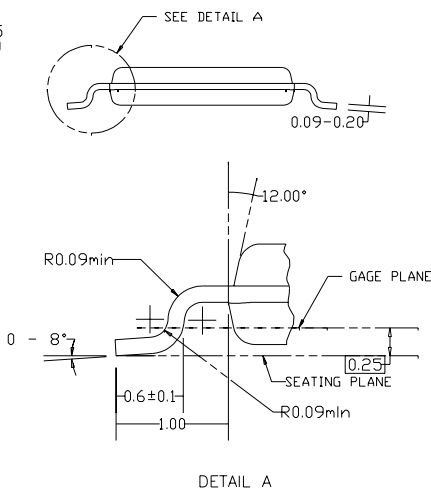

20-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 4.4mm Wide  
Package Number MTC20

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)