


## FDV304P Digital FET, P-Channel

### General Description



This P-Channel enhancement mode field effect transistors is produced using Fairchild's proprietary, high cell density, DMOS technology. This very high density process is tailored to minimize on-state resistance at low gate drive conditions. This device is designed especially for application in battery power applications such as notebook computers and cellular phones. This device has excellent on-state resistance even at gate drive voltages as low as 2.5 volts.

### Features

- -25 V, -0.46 A continuous, -1.5 A Peak.  
 $R_{DS(ON)} = 1.1 \Omega @ V_{GS} = -4.5 V$   
 $R_{DS(ON)} = 1.5 \Omega @ V_{GS} = -2.7 V.$
- Very low level gate drive requirements allowing direct operation in 3V circuits.  $V_{GS(th)} < 1.5V.$
- Gate-Source Zener for ESD ruggedness.  
 >6kV Human Body Model
- Compact industry standard SOT-23 surface mount package.

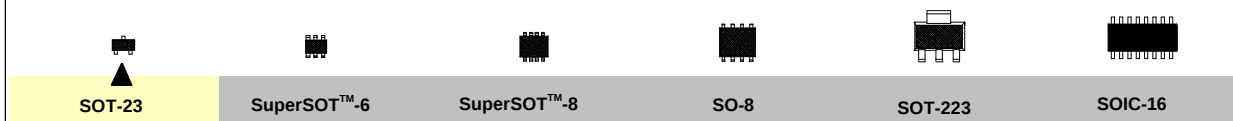

Mark:304



### Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless other wise noted

| Symbol                         | Parameter                                                                       | FDV304P    | Units              |
|--------------------------------|---------------------------------------------------------------------------------|------------|--------------------|
| $V_{DS}$                       | Drain-Source Voltage                                                            | -25        | V                  |
| $V_{GS}$                       | Gate-Source Voltage                                                             | -8         | V                  |
| $I_D$                          | Drain Current - Continuous                                                      | -0.46      | A                  |
|                                | - Pulsed                                                                        | -1.5       |                    |
| $P_D$                          | Maximum Power Dissipation                                                       | 0.35       | W                  |
| $T_J, T_{STG}$                 | Operating and Storage Temperature Range                                         | -55 to 150 | $^\circ\text{C}$   |
| ESD                            | Electrostatic Discharge Rating MIL-STD-883D Human Body Model (100pf / 1500 Ohm) | 6.0        | kV                 |
| <b>THERMAL CHARACTERISTICS</b> |                                                                                 |            |                    |
| $R_{\theta JA}$                | Thermal Resistance, Junction-to-Ambient                                         | 357        | $^\circ\text{C/W}$ |

## Electrical Characteristics (T<sub>A</sub> = 25 °C unless otherwise noted )

| Symbol                                                 | Parameter                                             | Conditions                                                                                            | Min   | Typ   | Max  | Units   |
|--------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-------|-------|------|---------|
| OFF CHARACTERISTICS                                    |                                                       |                                                                                                       |       |       |      |         |
| BV <sub>DSS</sub>                                      | Drain-Source Breakdown Voltage                        | V <sub>GS</sub> = 0 V, I <sub>D</sub> = -250 μA                                                       | -25   |       |      | V       |
| ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>                    | Breakdown Voltage Temp. Coefficient                   | I <sub>D</sub> = -250 μA, Referenced to 25 °C                                                         |       | -22   |      | mV / °C |
| I <sub>DSS</sub>                                       | Zero Gate Voltage Drain Current                       | V <sub>DS</sub> = -20 V, V <sub>GS</sub> = 0 V                                                        |       |       | -1   | μA      |
|                                                        |                                                       | T <sub>J</sub> = 55°C                                                                                 |       |       | -10  | μA      |
| I <sub>GSS</sub>                                       | Gate - Body Leakage Current                           | V <sub>GS</sub> = -8 V, V <sub>DS</sub> = 0 V                                                         |       |       | -100 | nA      |
| ON CHARACTERISTICS (Note)                              |                                                       |                                                                                                       |       |       |      |         |
| ΔV <sub>GS(th)</sub> /ΔT <sub>J</sub>                  | Gate Threshold Voltage Temp. Coefficient              | I <sub>D</sub> = -250 μA, Referenced to 25 °C                                                         |       | 2.1   |      | mV / °C |
| V <sub>GS(th)</sub>                                    | Gate Threshold Voltage                                | V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250 μA                                          | -0.65 | -0.86 | -1.5 | V       |
| R <sub>DS(ON)</sub>                                    | Static Drain-Source On-Resistance                     | V <sub>GS</sub> = -2.7 V, I <sub>D</sub> = -0.25 A                                                    |       | 1.22  | 1.5  | Ω       |
|                                                        |                                                       | V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -0.5 A                                                     |       | 0.87  | 1.1  |         |
|                                                        |                                                       | T <sub>J</sub> =125°C                                                                                 |       | 1.21  | 2    |         |
| I <sub>D(ON)</sub>                                     | On-State Drain Current                                | V <sub>GS</sub> = -2.7 V, V <sub>DS</sub> = -5 V                                                      | -0.5  |       |      | A       |
|                                                        |                                                       | V <sub>GS</sub> = -4.5 V, V <sub>DS</sub> = -5 V                                                      | -1    |       |      |         |
| g <sub>FS</sub>                                        | Forward Transconductance                              | V <sub>DS</sub> = -5 V, I <sub>D</sub> = -0.5 A                                                       |       | 0.8   |      | S       |
| DYNAMIC CHARACTERISTICS                                |                                                       |                                                                                                       |       |       |      |         |
| C <sub>iss</sub>                                       | Input Capacitance                                     | V <sub>DS</sub> = -10 V, V <sub>GS</sub> = 0 V,<br>f = 1.0 MHz                                        |       | 63    |      | pF      |
| C <sub>oss</sub>                                       | Output Capacitance                                    |                                                                                                       |       | 34    |      | pF      |
| C <sub>rss</sub>                                       | Reverse Transfer Capacitance                          |                                                                                                       |       | 10    |      | pF      |
| SWITCHING CHARACTERISTICS (Note)                       |                                                       |                                                                                                       |       |       |      |         |
| t <sub>D(on)</sub>                                     | Turn - On Delay Time                                  | V <sub>DD</sub> = -6 V, I <sub>D</sub> = -0.5 A,<br>V <sub>GS</sub> = -4.5 V, R <sub>GEN</sub> = 50 Ω |       | 7     | 20   | ns      |
| t <sub>r</sub>                                         | Turn - On Rise Time                                   |                                                                                                       |       | 8     | 20   | ns      |
| t <sub>D(off)</sub>                                    | Turn - Off Delay Time                                 |                                                                                                       |       | 55    | 110  | ns      |
| t <sub>f</sub>                                         | Turn - Off Fall Time                                  |                                                                                                       |       | 35    | 70   | ns      |
| Q <sub>g</sub>                                         | Total Gate Charge                                     | V <sub>DS</sub> = -5 V, I <sub>D</sub> = - 0.25 A,<br>V <sub>GS</sub> = -4.5 V                        |       | 1.1   | 1.5  | nC      |
| Q <sub>gs</sub>                                        | Gate-Source Charge                                    |                                                                                                       |       | 0.32  |      | nC      |
| Q <sub>gd</sub>                                        | Gate-Drain Charge                                     |                                                                                                       |       | 0.25  |      | nC      |
| DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS |                                                       |                                                                                                       |       |       |      |         |
| I <sub>S</sub>                                         | Maximum Continuous Drain-Source Diode Forward Current |                                                                                                       |       |       | -0.5 | A       |
| V <sub>SD</sub>                                        | Drain-Source Diode Forward Voltage                    | V <sub>GS</sub> = 0 V, I <sub>S</sub> = -0.5 A (Note)                                                 |       | -0.89 | -1.2 | V       |

Note:  
Pulse Test: Pulse Width ≤ 300μs, Duty Cycle ≤ 2.0%.

## Typical Electrical Characteristics

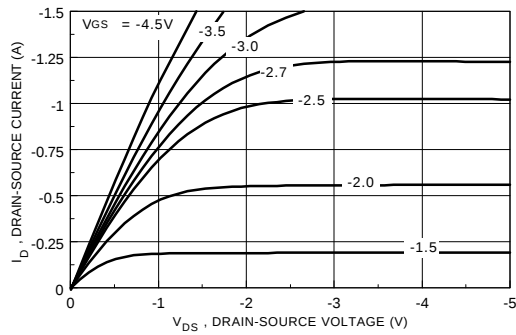


Figure 1. On-Region Characteristics.

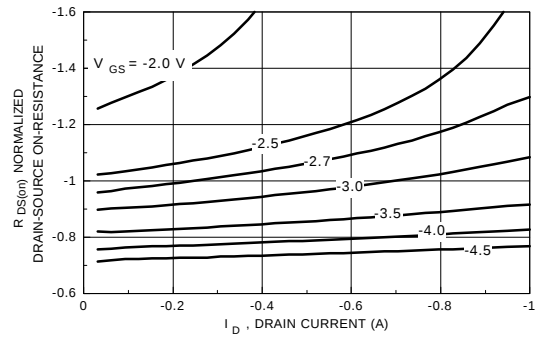


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage.

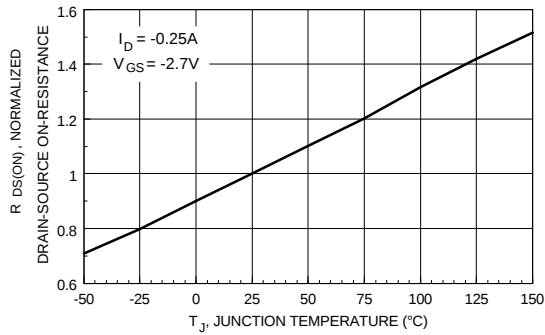


Figure 3. On-Resistance Variation with Temperature.

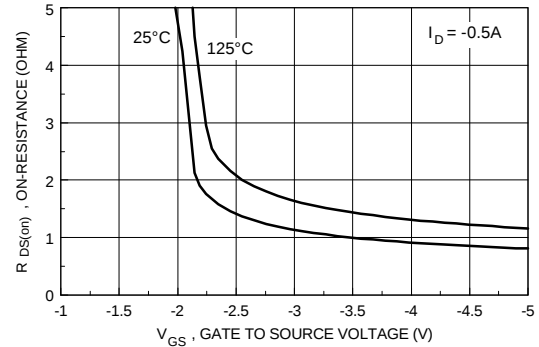


Figure 4. On Resistance Variation with Gate-To- Source Voltage.

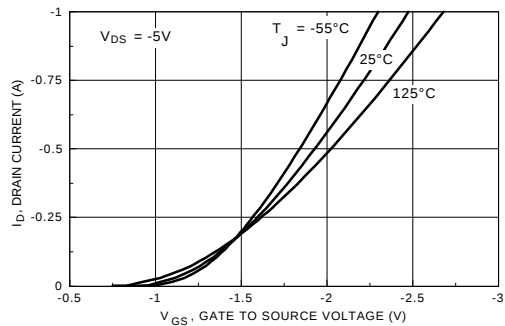


Figure 5. Transfer Characteristics.

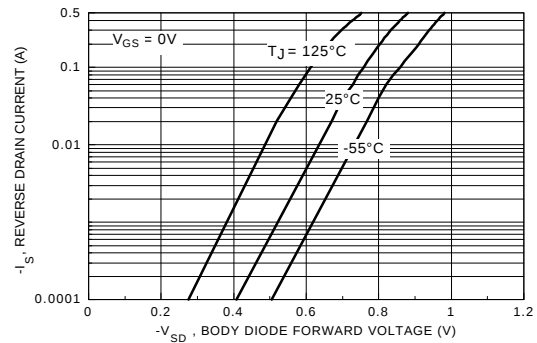


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature.

## Typical Electrical And Thermal Characteristics

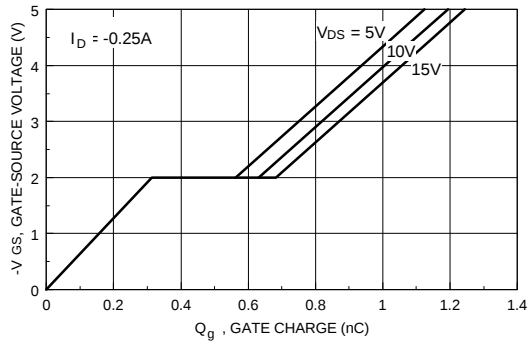


Figure 7. Gate Charge Characteristics.

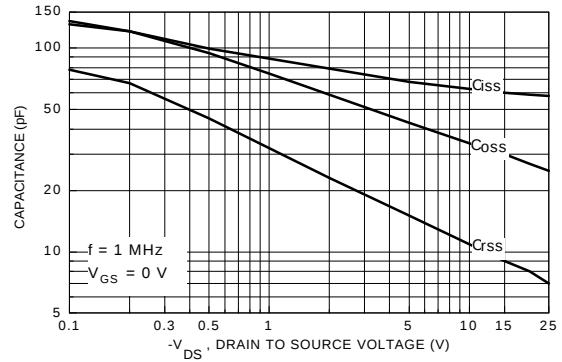


Figure 8. Capacitance Characteristics.

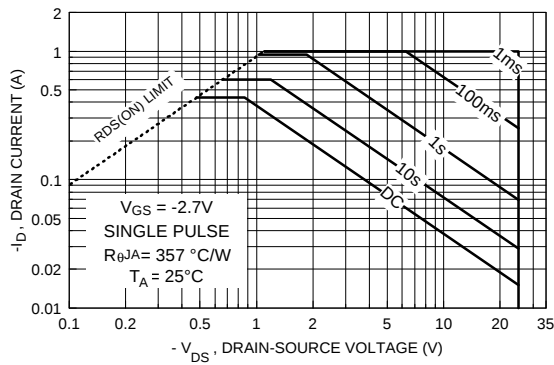


Figure 9. Maximum Safe Operating Area.

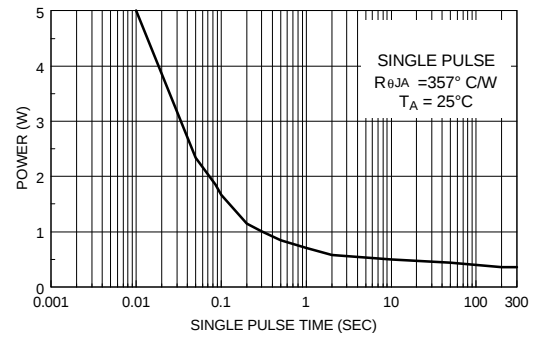


Figure 10. Single Pulse Maximum Power Dissipation.



Figure 11. Transient Thermal Response Curve.