



2SA985


PNP EPITAXIAL SILICON TRANSISTOR

LOW FREQUENCY POWER AMPLIFIER

- Complement to 2SC2275

ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-120	V
Collector-Emitter Voltage	V_{CE0}	-120	V
Emitter-Base voltage	V_{EB0}	-7	V
Collector Current (DC)	I_C	-1.5	A
Collector Dissipation ($T_c=25^{\circ}\text{C}$)	P_C	25	W
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-50~150	$^{\circ}\text{C}$

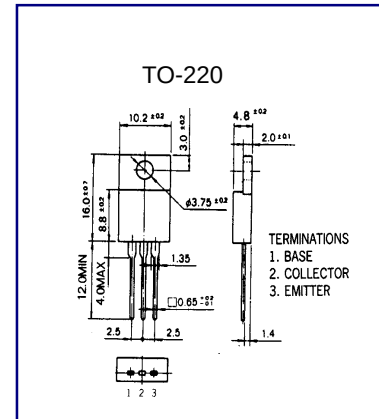

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -120\text{V}$, $I_E = 0$			100	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -7\text{V}$, $I_C = 0$			100	μA
DC Current Gain	h_{FE1}	$V_{CE} = -5\text{V}$, $I_C = -0.3\text{A}$		150		
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -2\text{A}$, $I_B = -0.2\text{A}$			-1.5	V
Current Gain Bandwidth Product	f_T	$V_{CE} = -5\text{V}$, $I_C = -0.5\text{A}$		180		MHZ