



Micro Commercial Components  
 21201 Itasca Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# HER501 THRU HER508

## Features

- High Surge Current Capability
- High Reliability
- Low Forward Voltage Drop
- High Current Capability


## Maximum Ratings

- Operating Temperature: -65°C to +125°C
- Storage Temperature: -65°C to +150°C
- For capacitive load, derate current by 20%

MCC Catalog Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
HER501	---	50V	35V	50V
HER502	---	100V	70V	100V
HER503	---	200V	140V	200V
HER504	---	300V	210V	300V
HER505	---	400V	280V	400V
HER506	---	600V	420V	600V
HER507	---	800V	560V	800V
HER508	---	1000V	700V	1000V

**5.0 Amp High  
 Efficient Rectifiers  
 50 to 1000 Volts**

## DO-201AD

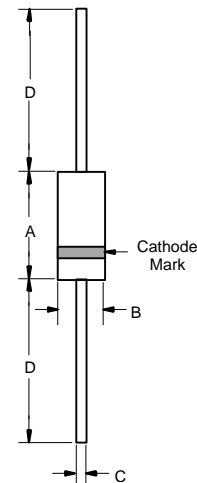

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	5 A	$T_A = 55^\circ\text{C}$
Peak Forward Surge Current	$I_{FSM}$	200A	8.3ms, half sine
Maximum Instantaneous Forward Voltage HER501-504 HER505 HER506-508	$V_F$	1.0V 1.3V 1.7V	$I_{FM} = 5.0\text{A};$ $T_A = 25^\circ\text{C}$
Reverse Current At Rated DC Blocking Voltage (Maximum DC)	$I_R$	10 $\mu\text{A}$ 200 $\mu\text{A}$	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$
Maximum Reverse Recovery Time HER501-505 HER506-508	$T_{rr}$	50ns 75ns	$I_F=0.5\text{A}, I_R=1.0\text{A},$ $I_{rr}=0.25\text{A}$
Typical Junction Capacitance HER501-505 HER506-508	$C_J$	100pF 65pF	Measured at 1.0MHz, $V_R=4.0\text{V}$

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	---	.370	---	9.50	
B	---	.250	---	6.40	
C	.048	.052	1.20	1.30	
D	1.000	---	25.40	---	

\*Pulse Test: Pulse Width 300 $\mu\text{sec}$ , Duty Cycle 1%

# HER501 THRU HER508

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM


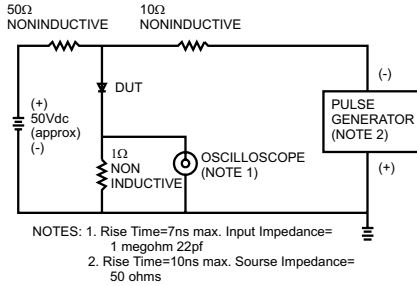


FIG.2- MAXIMUM AVERAGE FORWARD CURRENT DERATING




FIG.3- TYPICAL REVERSE CHARACTERISTICS

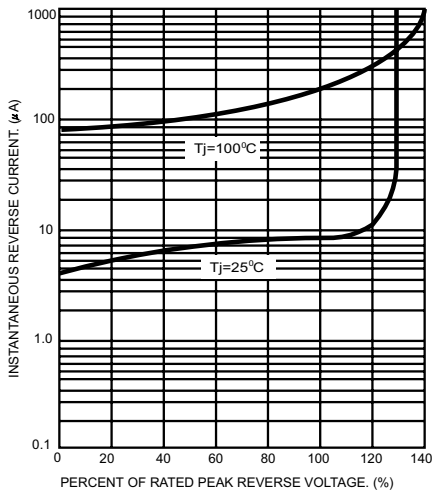


FIG.5- TYPICAL FORWARD CHARACTERISTICS

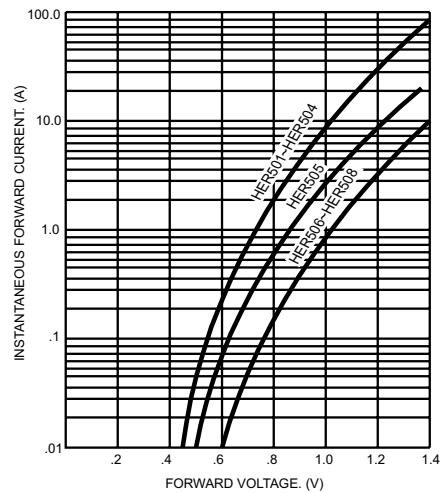


FIG.4- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

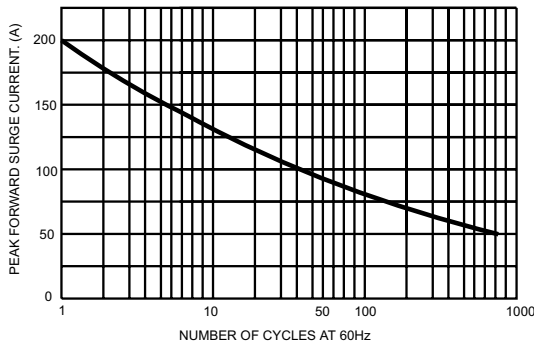


FIG.6- TYPICAL JUNCTION CAPACITANCE

