
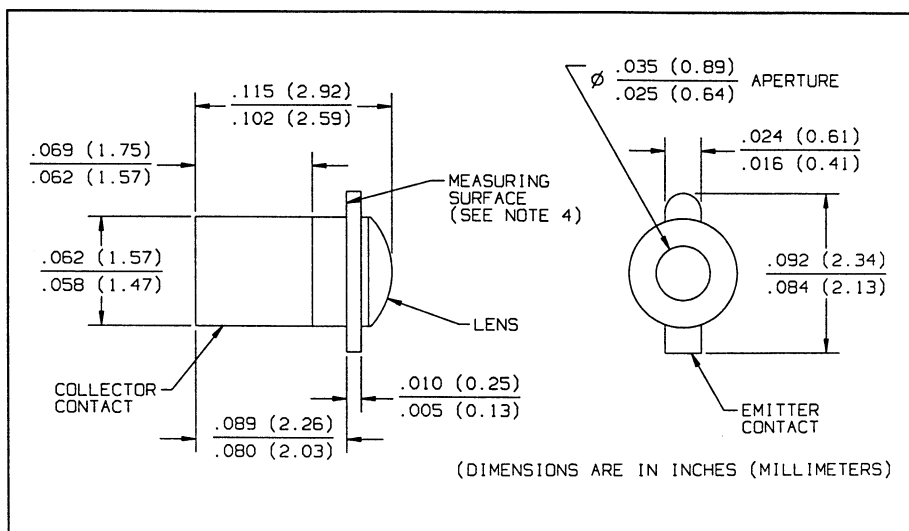


PN Junction Silicon Photodiode Type OP900SL

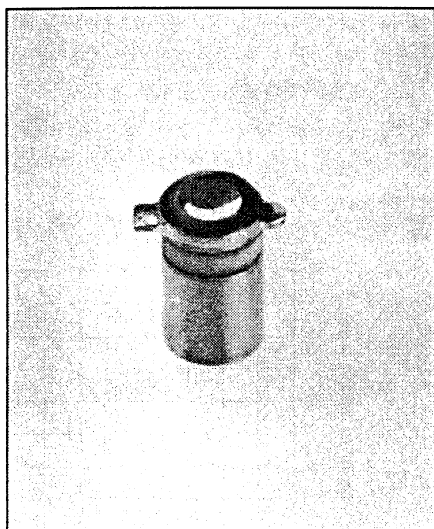

Features

- Narrow receiving angle
- Enhanced temperature range
- Ideal for direct mounting in PC boards
- Fast switching speed
- Mechanically and spectrally matched to the OP123 series emitters
- Linear response vs. irradiance

Description

The OP900SL consists of a PN junction silicon photodiode mounted in a miniature, glass lensed, hermetically sealed "Pill" package. The lensing effect allows an acceptance half angle of 18° measured from the optical axis to the half power point.

Replaces

OP900 series



Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Reverse Voltage	100 V
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Operating Temperature Range	-65°C to $+125^\circ\text{C}$
Soldering Temperature (5 sec. with soldering iron)	$260^\circ\text{C}^{(1)}$
Power Dissipation	$50\text{ mW}^{(2)}$

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (2) Derate linearly $0.5\text{ mW}/^\circ\text{C}$ above 25°C .
- (3) Junction temperature maintained at 25°C .
- (4) Light source is an unfiltered tungsten bulb operating at $CT = 2870\text{ K}$ or equivalent infrared source.

Typical Performance Curves





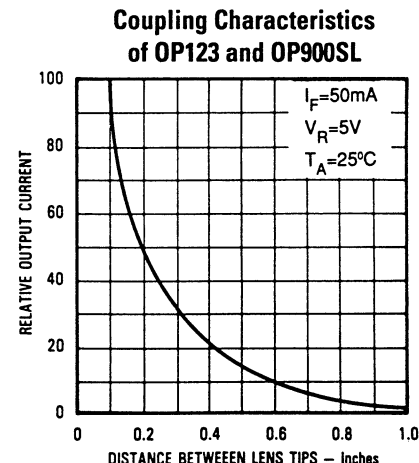
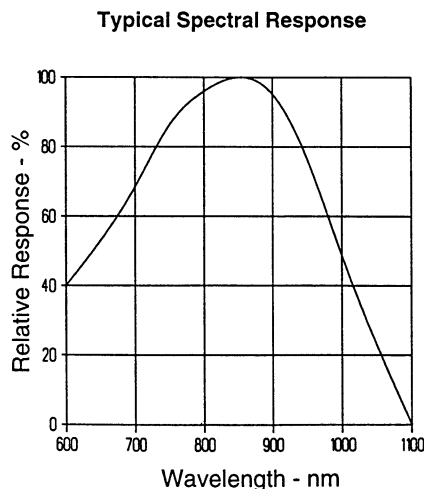


Type OP900SL

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
I_L	Light Current	8.0	14.0		μA	$V_R = 10\text{ V}$, $E_e = 20\text{ mW/cm}^2$ ⁽³⁾⁽⁴⁾
I_D	Dark Current			10	nA	$V_R = 10\text{ V}$, $E_e = 0$ ⁽³⁾
$V_{(BR)R}$	Reverse Voltage Breakdown	100	150		V	$I_R = 100\text{ }\mu\text{A}$
t_r	Rise Time		100		ns	$V_R = 50\text{ V}$, $I_L = 8\text{ }\mu\text{A}$
t_f	Fall Time		100		ns	$R_L = 1\text{ k}\Omega$, See Test Circuit

Typical Performance Curves

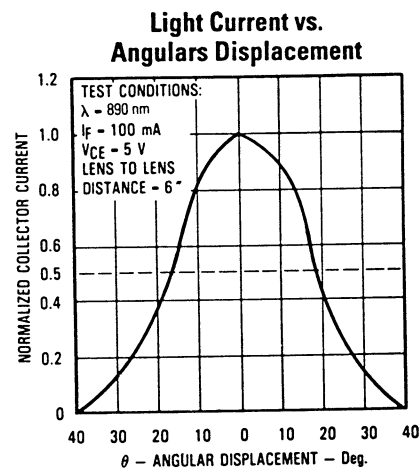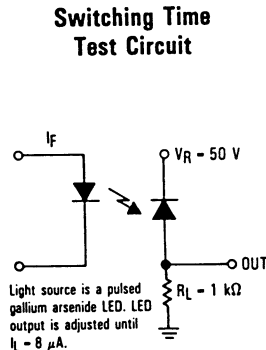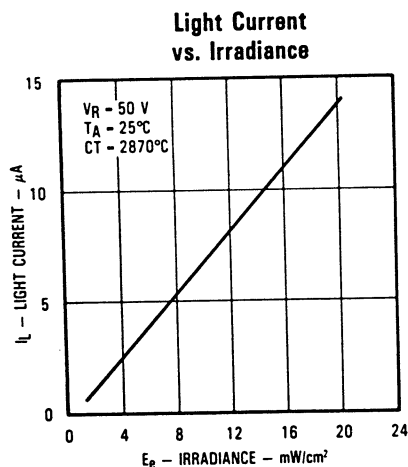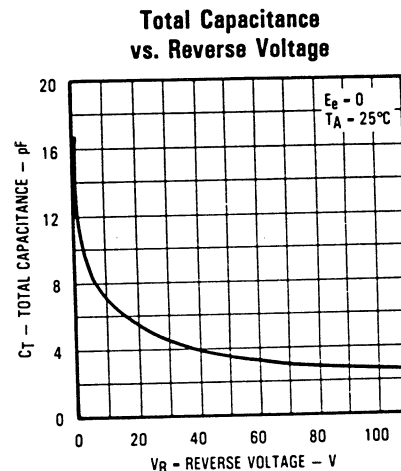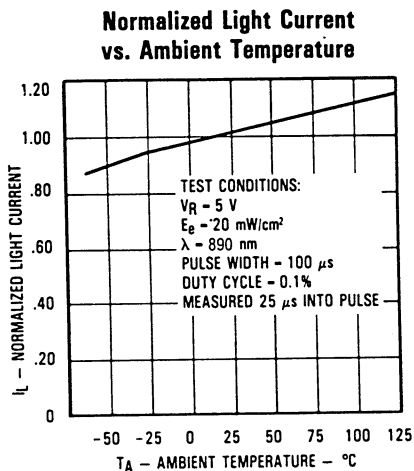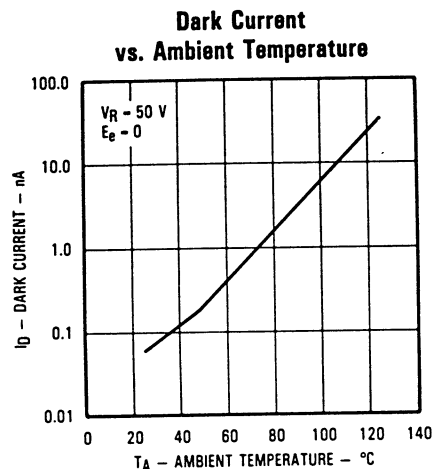

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396