

AP1117

1A Positive Low Dropout Regulator

■ Features

- 1.3V Maximum Dropout at Full Load Current
- Fast Transient Response.
- Output Current Limiting
- Built-in Thermal Shutdown
- Package: SOT223-3L, TO252-3L, TO220-3L
- Flexible Output voltage setting 0.1V Step in the range of 1.3V to 5V
- Good noise rejection

■ Applications

- PC peripheral
- Communication



■ General Description

AP1117 is a positive low dropout adjustable regulator with minimum of 1A output current capability. The product is specifically designed to provide well-regulated supply for low voltage IC applications such as high-speed bus termination and low current 3.3V logic supply. AP1117 is also well suited for other applications such as VGA cards. AP1117 is guaranteed to have <1.3V dropout at full load current making it ideal to provide well regulated outputs of 1.25 to 3.3 with 4.6 to 12V input supply.

■ Ordering Information

AP 1117 X XX X			
Low Dropout Regulator	Package	Vout	Packing
	E : SOT223-3L	Blank : Adj	Blank : Tube
	D : TO252-3L	13 : 1.3V	A : Taping
	T : TO220-3L	...	
		33 : 3.3V	
		...	
		50 : 5.0V	

■ Typical Circuit

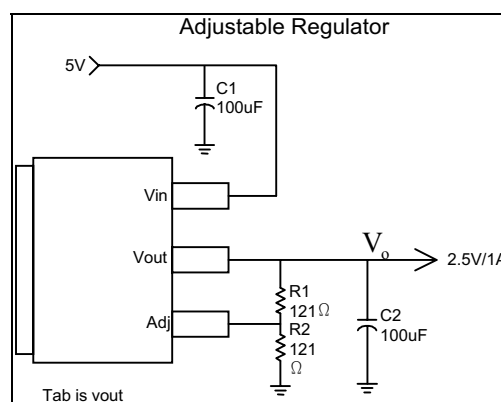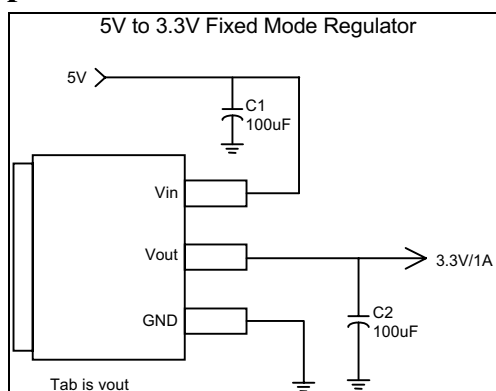

Note:
$$V_o = V_{REF} * (1 + \frac{R_1}{R_2})$$


This datasheet contains new product information. Analog Technology reserves the rights to modify the product specification without notice. No liability is assumed as a result of the use of this product. No rights under any patent accompany the sale of the product.

AP1117

1A Positive Low Dropout Regulator

ATC

■ Connection Diagram

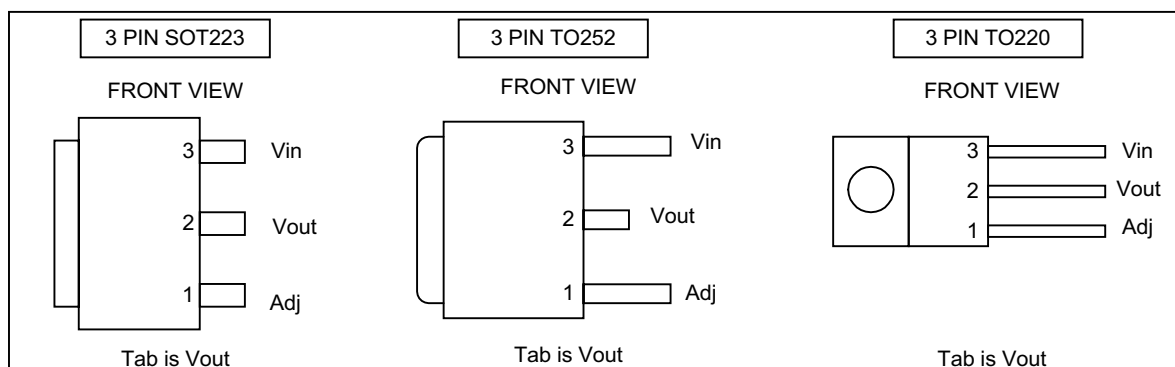

■ Pin Descriptions

Name	I/O	Pin#	Function
Adj	I	1	A resistor divider from this pin to the Vout pin and ground sets the output voltage.
Vout	O	2	The output of the regulator. A minimum of 10uF capacitor must be connected from this pin to ground to insure stability.
Vin	I	3	The input pin of regulator. Typically a large storage capacitor is connected from this pin to ground to insure that the input voltage does not sag below the minimum dropout voltage during the load transient response. This pin must always be 1.3V higher than Vout in order for the device to regulate properly.

AP1117

1A Positive Low Dropout Regulator

ATC







■ Absolute Maximum Ratings

DC Supply Voltage (Vin)		-0.3 to 12 V
Power Dissipation		Internally Limited
Storage Temperature		-65 to +150 °C
Operating Junction Temperature Range		0 to +150 °C

■ Electrical Characteristics (Under Operating Conditions)

Sym.	Parameter	Conditions (Notes)	Min.	Typ.	Max.	Unit
V _{REF}	Reference Voltage	AP1117-ADJ I _o =10mA, T _j =25°C, (V _{in} -V _{out})=1.35V	1.237	1.250	1.263	V
V _{out}	Output voltage	AP1117-3.3 I _o =10mA, T _j =25°C, V _{in} =5V	3.267	3.300	3.333	V
	Line Regulation	I _o =10mA, 1.35V < (V _{in} -V _{out}) < 12V			0.2	%
	Load Regulation	V _{in} =3.3V, V _{adj} =0, 10mA<I _o <1A			1	%
ΔV _o	Dropout Voltage	I _o =1A (ΔV _{out} = 1% V _{out})		1.25	1.30	V
	Current Limit	V _{in} =3.3V, dV _o =100mV	1.1			A
	Minimum Load Current	V _{in} =3.3V, V _{adj} =0V		5	10	mA
	Thermal Regulation	30mS Pulse, V _{in} -V _{out} =3v, I _o =1A		0.01	0.02	%W
	Ripple Rejection	F=120Hz, C _{out} =25uF Tan I _o =1A, V _{in} -V _{out} =3V		60	70	dB
I _{ADJ}	Adjust Pin Current	I _o =10mA, V _{in} -V _{out} =1.35V, T _j =25°C I _o =10mA, V _{in} -V _{out} =1.35V		55	100	μA
	Adjust Pin Current Change	I _o =10mA, V _{in} -V _{out} =1.35V, T _j =25°C		0.2	5	μA
	Temperature Stability	V _{in} =3.3V, V _{adj} =0V, I _o =10mA		0.5		%
θ _{JA}	Thermal Resistance Junction-to-Ambient (No heat sink ;No air flow)	SOT-223 TO-252 TO-220		117 102 85		°C/W °C/W °C/W
θ _{JC}	Thermal Resistance Junction-to-Case	SOT-223: Control Circuitry/Power Transistor TO-252: Control Circuitry/Power Transistor TO-220: Control Circuitry/Power Transistor		15 10 0.65/2.7		°C/W °C/W °C/W

■ Typical Performance Characteristics

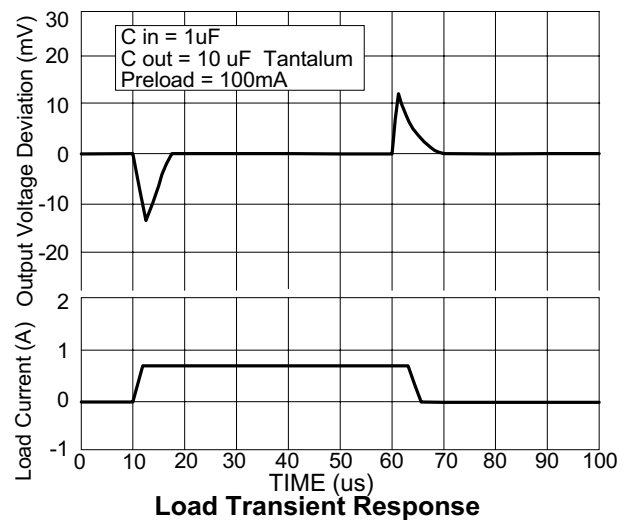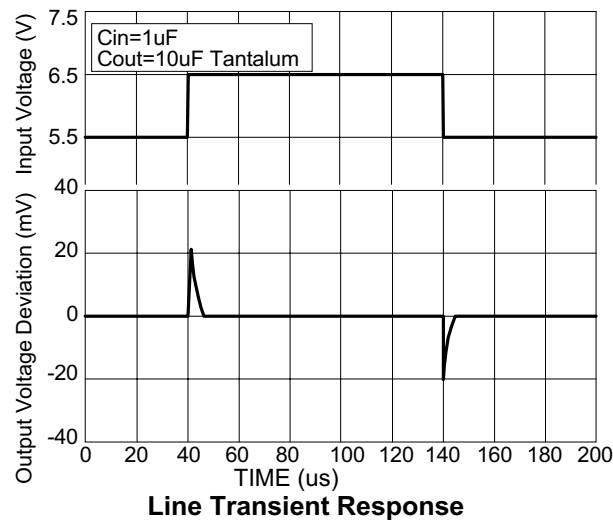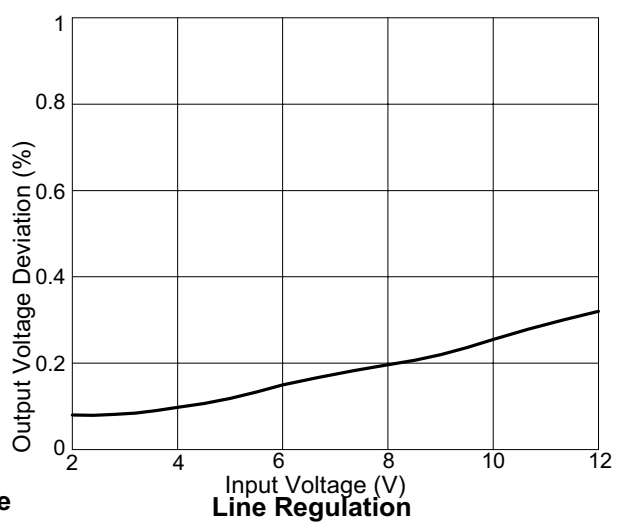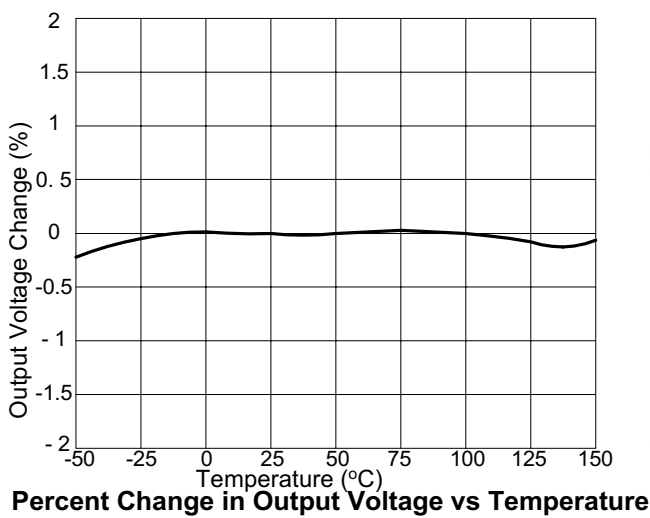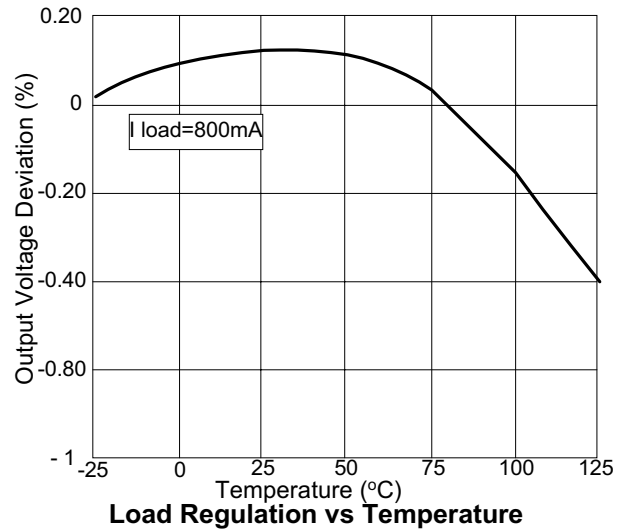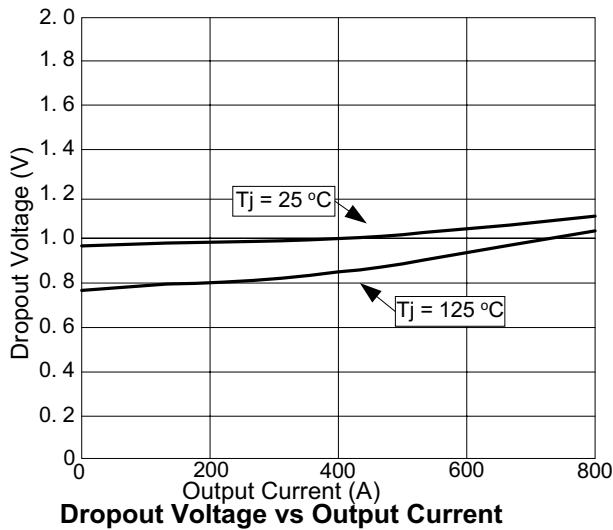


AP1117

1A Positive Low Dropout Regulator


ATC

■ Marking Information


(1) SOT223-3L

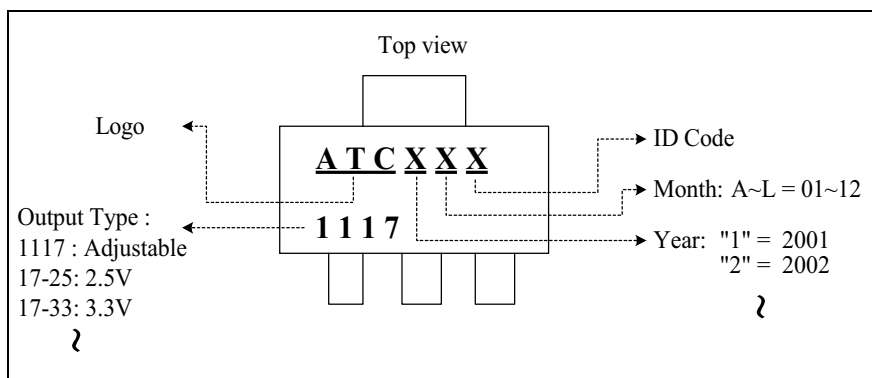

(2) TO252-3L

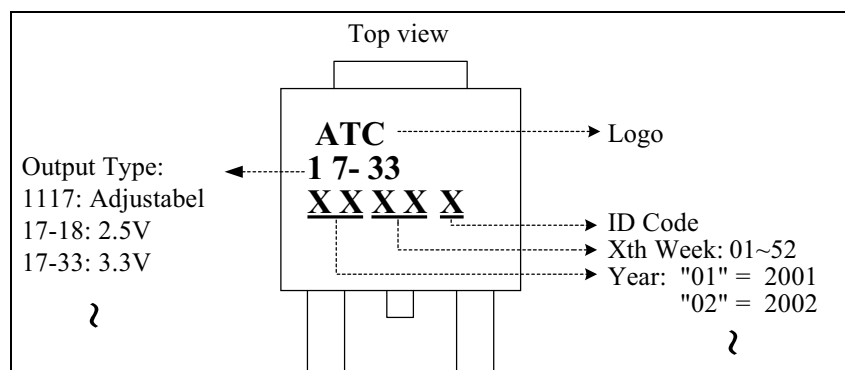

(3) TO220-3L

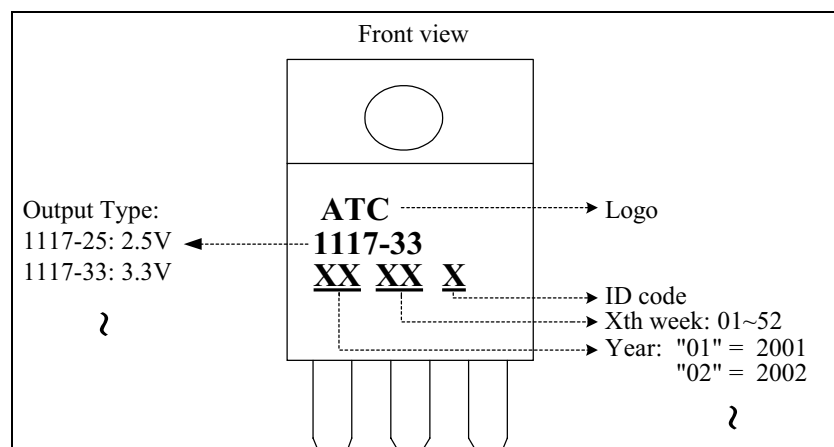


AP1117

1A Positive Low Dropout Regulator



■ Package Dimension

(1) SOT223-3L

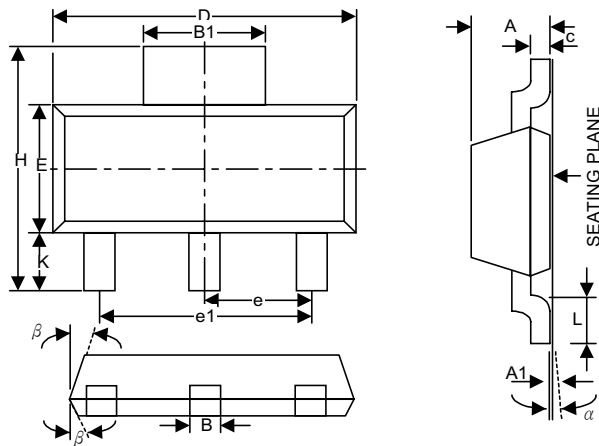


NOTES:

1. JEDEC OUTLINE: TO-261AA

Variations (Dimensions Show in mm)

SYMBOLS	MIN.	NOM.	MAX.
A	1.50	1.65	1.80
A1	0.02	0.05	0.08
B	0.60	0.70	0.80
B1	2.90	—	3.15(REF.)
c	0.28	0.30	0.32
D	6.30	6.50	6.70
E	3.30	3.50	3.70
e	2.3 BSC		
e1	4.6 BSC		
H	6.70	7.00	7.30
L	0.91	1.00	1.10
K	1.50	1.75	2.00
α	0°	5°	10°
β	—	13°	—

(2) TO252-3L

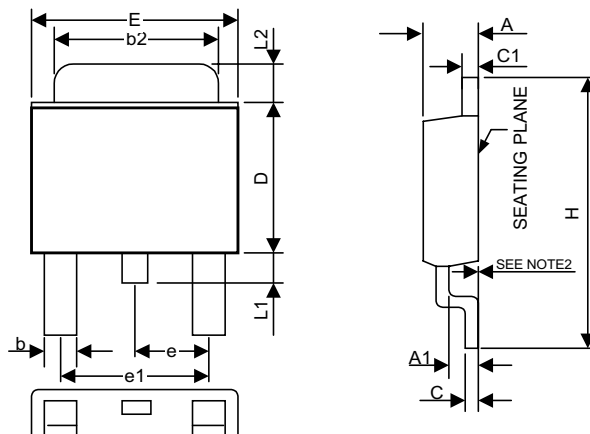

NOTES:

1. JEDEC OUTLINE: TO-252 AB

2 MILS SUGGESTED FOR POSITIVE CONTACT AT MOUNTING.

Variations (Dimensions Show in inch)

SYMBOLS	MIN.	MAX.
A	0.086	0.094
A1	0.040	0.050
b	0.024 TYP.	
b2	0.205	0.215
C	0.018	0.023
C1	0.018	0.023
D	0.210	0.220
E	0.250	0.265
e	0.090 BSC.	
e1	0.180 BSC.	
H	0.370	0.410
L	0.020	—
L1	0.025	0.040
L2	0.06	0.08


AP1117

1A Positive Low Dropout Regulator

ATC

(3) TO220-3L

Variations (Dimensions Show in inch)

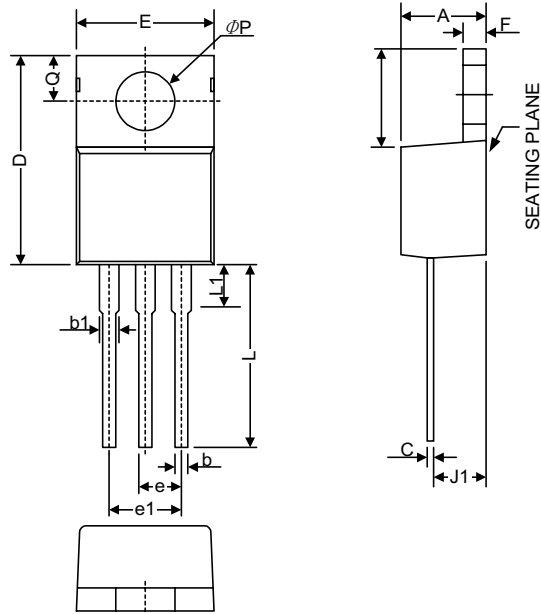

SYMBOLS	MIN.	MAX.
A	0.14	0.19
b1	0.045	0.07
b	0.02	0.045
C	0.012	0.045
D	0.56	0.65
E	0.38	0.42
e	0.09	0.11
e1	0.19	0.21
F	0.02	0.055
H1	0.23	0.27
J1	0.08	0.115
L	0.5	0.58
φP	0.139	0.161
Q	0.1	0.135