

PC120 Series PC121 Series

Long Creepage Distance Type Photocoupler

* Lead forming type (I type) and taping reel type (P type) are also available. (PC120I/PC120FI/PC121I/PC121FI, PC120P/PC120PF/PC121P/PC121PF) (Page 656)

* DIN-VDE0884 approved type is also available as an option.

Features

1. Conforms to European Safety Standards
2. Long creepage distance type
(Creepage distance : 6mm or more)
3. Internal isolation distance : 0.4mm or more
4. Compact dual-in-line package
5. High collector-emitter voltage
(V_{CEO} : 70V for PC121 series)
6. Recognized by UL file No. E64380

Approved by VDE (DIN-VDE0884 ; No. 76851)

Approved by BSI (BS415 : No. 7087,
BS7002 : No. 7409)

Approved by SEMKO (No. 9216212)

Approved by DEMKO (No. 108025)

Approved by EI (No. 155030-01)

Applications

1. Switching power supplies
2. OA equipment
3. TVs


Model Line-up

	Standard type		High collector-emitter voltage type	
DIP type	PC120	PC120F	PC121	PC121F
Surface mount type	PC120P*	PC120PF*	PC121P*	PC121PF*

*Lead forming type

(Unit : mm)

Outline Dimensions

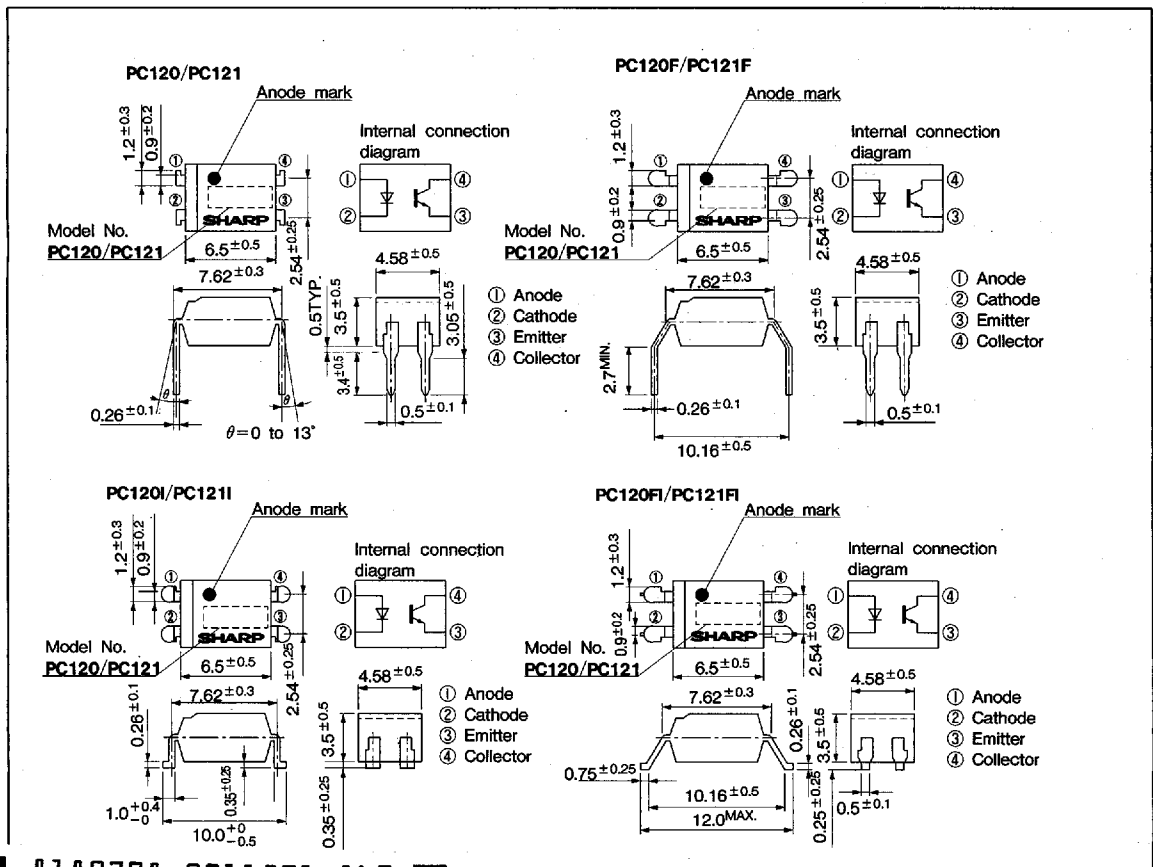

8180798 0011591 869

■ Absolute Maximum Ratings

(Ta=25°C)

Parameter	Symbol	Rating		Unit	
		PC120 Series	PC121 Series		
Input	Forward current	I_F	50	mA	
	*1 Peak forward current	I_{FM}	1	A	
	Reverse voltage	V_R	6	V	
	Power dissipation	P	70	mW	
Output	Collector-emitter voltage	V_{CEO}	35	70	V
	Emitter-collector voltage	V_{ECO}	6		V
	Collector current	I_C	50		mA
	Collector power dissipation	P_C	150		mW
	Total power dissipation	P_{tot}	200		mW
*2 Isolation voltage	V_{iso}		5 000	V_{rms}	
Operating temperature	T_{opr}		-30 to +100	°C	
Storage temperature	T_{stg}		-55 to +125	°C	
*3 Soldering temperature	T_{sol}		260	°C	

PC120 Series :

PC120/PC120I/
PC120F/PC120FI

PC121 Series :

PC121/PC121I/
PC121F/PC121FI*1 Pulse width $\leq 100 \mu s$, Duty ratio = 0.001

*2 40 to 60%RH, AC for 1 minute

*3 For 10 seconds

■ Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit		
Input	Forward voltage	V_F	$I_F=20mA$	—	1.2	1.4	V	
	Reverse voltage	I_R	$V_R=4V$	—	—	10	μA	
	Terminal capacitance	C_T	$V=0, f=1kHz$	—	30	250	pF	
Output	Collector dark current	I_{CEO}	$V_{CE}=20V, I_F=0$	—	—	10^{-7}	A	
	Collector-emitter breakdown voltage	PC120 series PC121 series	BV_{CEO}	$I_C=0.1mA, I_F=0$	35	—	—	V
					70	—	—	
Emitter-collector breakdown voltage	BV_{ECO}	$I_E=10 \mu A, I_F=0$	6	—	—	V		
Transfer characteristics	Current transfer ratio	CTR	$I_F=5mA, V_{CE}=5V$	50	—	400	%	
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20mA, I_C=1mA$	—	0.1	0.2	V	
	Isolation resistance	R_{iso}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	—	Ω	
	Floating capacitance	C_f	$V=0, f=1MHz$	—	0.6	1.0	pF	
	Cut-off frequency	f_c	$V_{CE}=5V, I_C=2mA, R_L=100\Omega$ -3dB point	—	80	—	kHz	
	Response time	Rise time	t_r	$V_{CE}=2V, I_C=2mA$	—	4	18	μs
Fall time		t_f	$R_L=100\Omega$	—	3	18	μs	

Fig. 1 Forward Current vs. Ambient Temperature

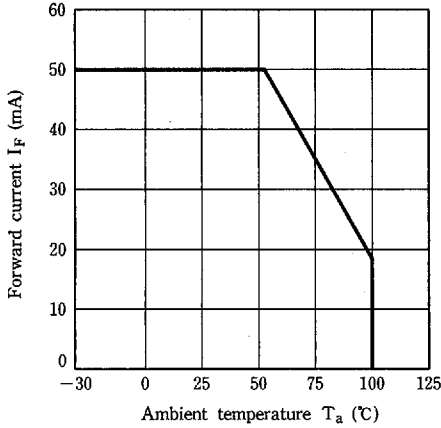


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

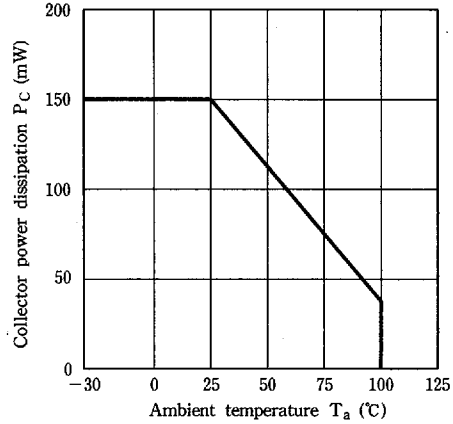


Fig. 3 Peak Forward Current vs. Duty Ratio

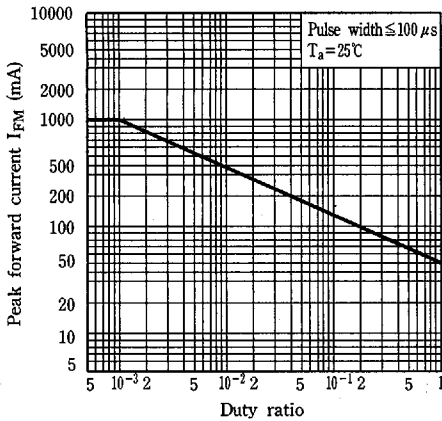


Fig. 4 Forward Current vs. Forward Voltage

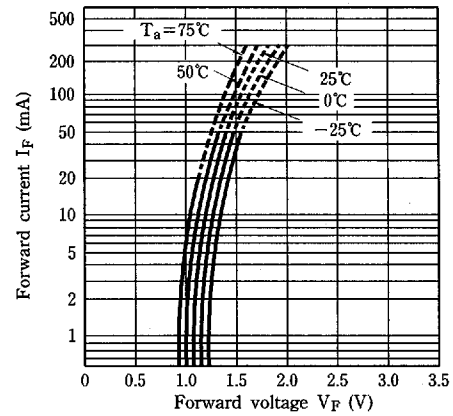


Fig. 5-a Current Transfer Ratio vs. Forward Current (PC120 Series)


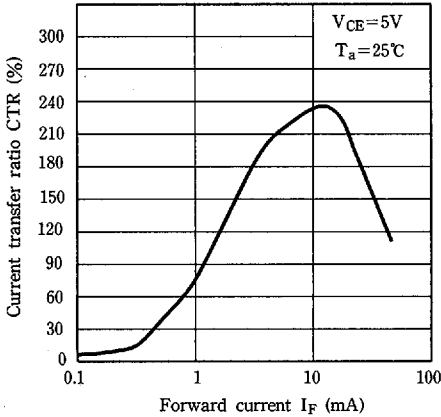


Fig. 5-b Current Transfer Ratio vs. Forward Current (PC121 Series)

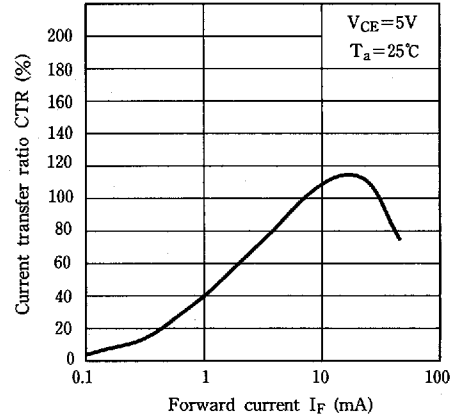

6
Photocouplers

Fig. 6-a Collector Current vs. Collector-emitter Voltage

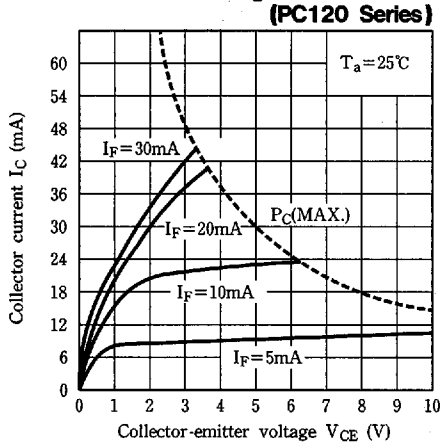


Fig. 6-b Collector Current vs. Collector-emitter Voltage

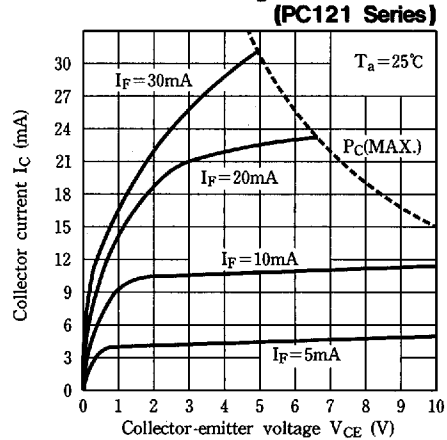


Fig. 7-a Relative Current Transfer Ratio vs. Ambient Temperature

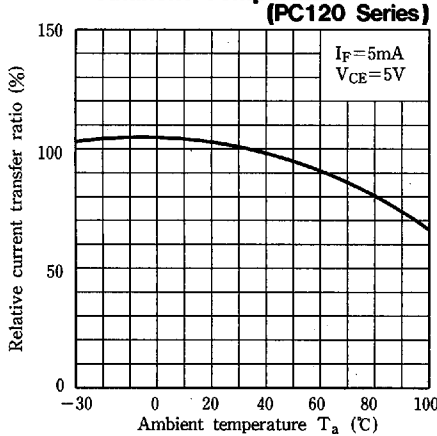


Fig. 7-b Relative Current Transfer Ratio vs. Ambient Temperature

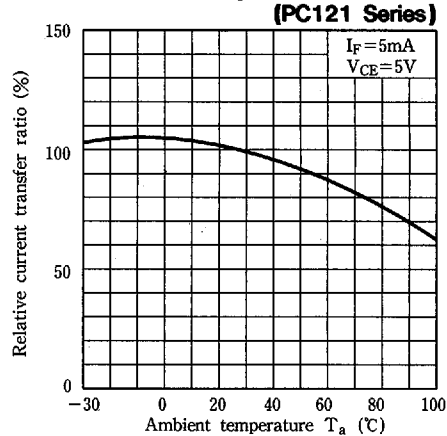


Fig. 8-a Collector-emitter Saturation Voltage vs. Ambient Temperature

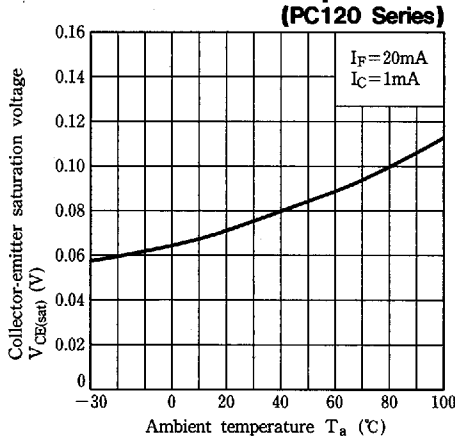


Fig. 8-b Collector-emitter Saturation Voltage vs. Ambient Temperature

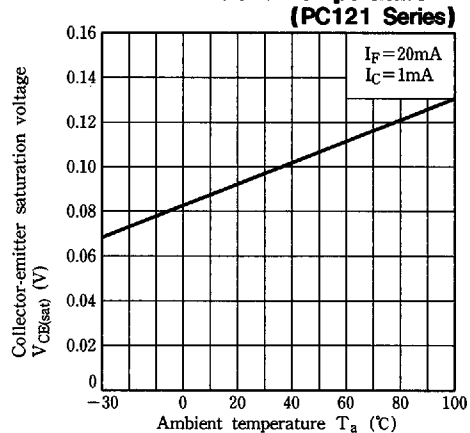


Fig. 9-a Collector Dark Current vs. Ambient Temperature (PC120 Series)

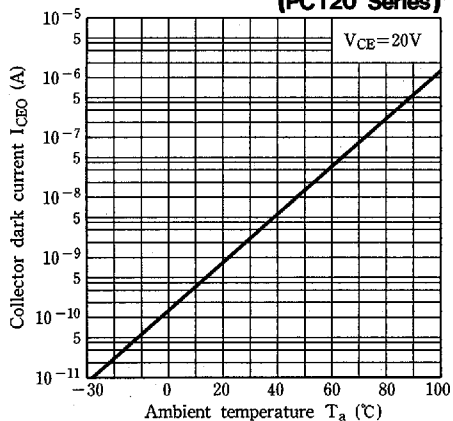


Fig. 9-b Collector Dark Current vs. Ambient Temperature (PC121 Series)

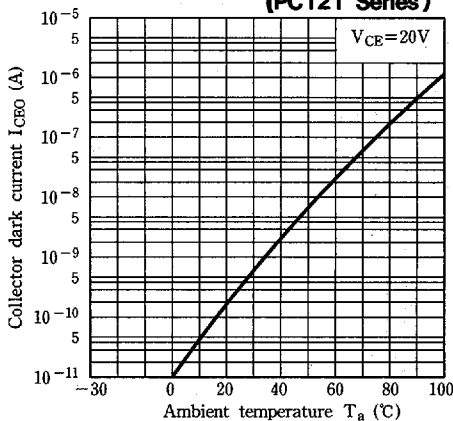


Fig. 10-a Response Time vs. Load Resistance (PC120 Series)

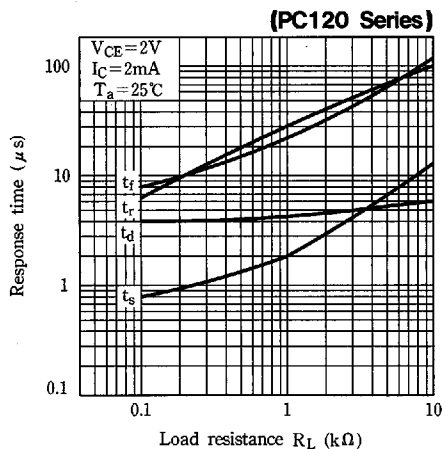


Fig. 10-b Response Time vs. Load Resistance (PC121 Series)

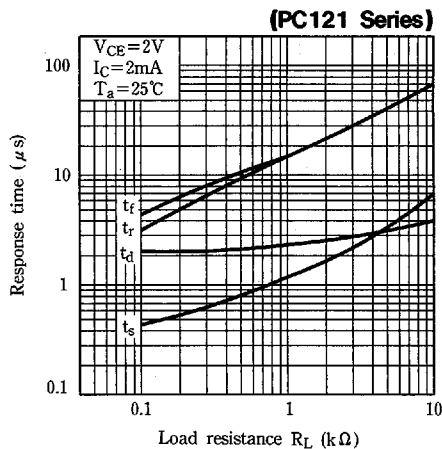


Fig. 11-a Frequency Response (PC120 Series)


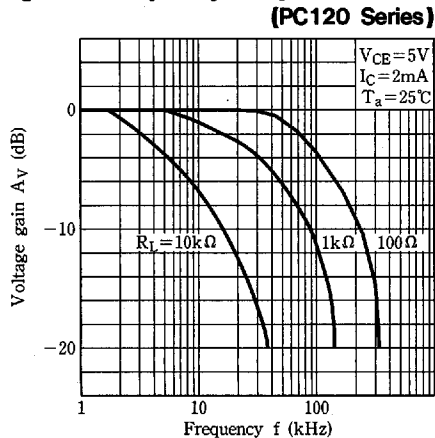


Fig. 11-b Frequency Response (PC121 Series)

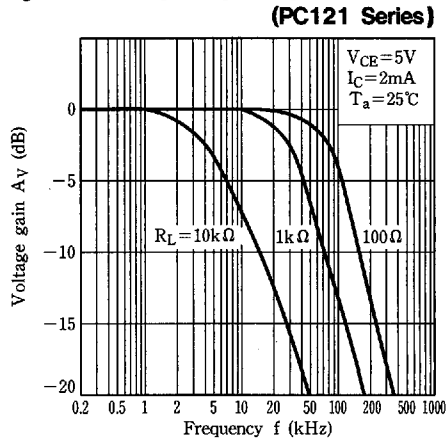

6
Photocouplers

Fig.12-a Collector-emitter Saturation Voltage vs. Forward Current (PC120 Series)


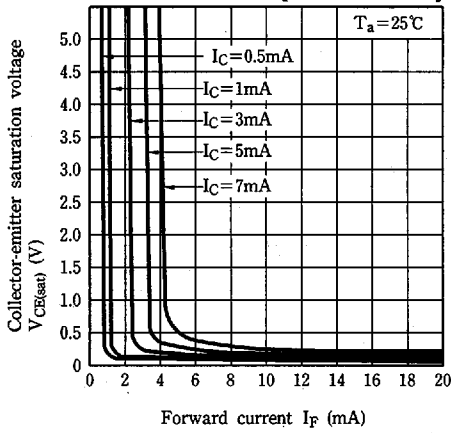


Fig.12-b Collector-emitter Saturation Voltage vs. Forward Current (PC121 Series)

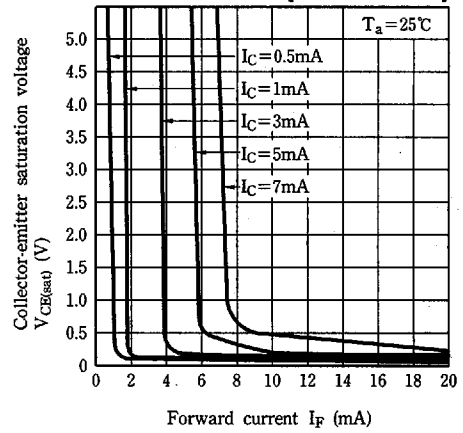

● Please refer to the chapter "Precautions for Use" . (Page 78 to 93)