

Fuji Discrete Package IGBT


■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Minimized Internal Stray Inductance

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

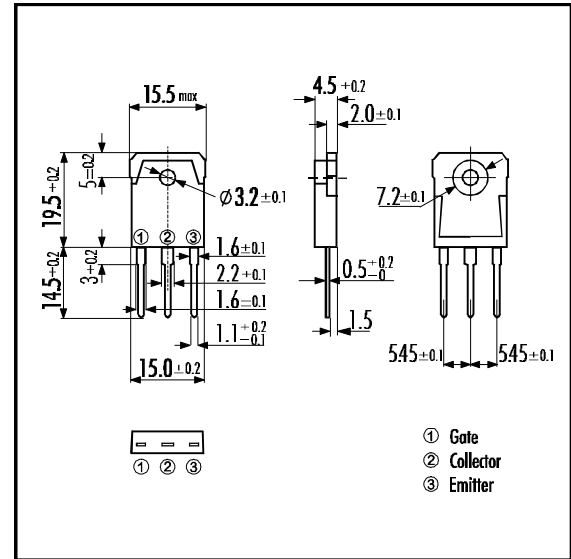


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CES}	1200	V
Gate -Emitter Voltage	V _{GES}	± 20	V
Collector Current	DC T _c = 25°C	I _{C 25}	16
	DC T _c =100°C	I _{C 100}	10
	1ms T _c = 25°C	I _{C PULSE}	48
IGBT Max. Power Dissipation	P _C	135	W
FWD Max. Power Dissipation	P _C	85	W
Operating Temperature	T _I	+150	°C
Storage Temperature	T _{stg}	-40 ~ +150	°C
Mounting Screw Torque		50	Nm

■ Equivalent Circuit






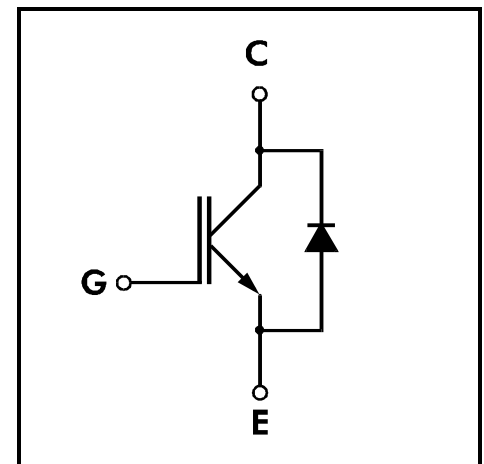








• Electrical Characteristics (at T_j=25°C)






Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =1200V			1.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			20	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =10mA	5.5		8.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =10A			3.5	V
Input capacitance	C _{ies}	V _{GE} =0V		1200		pF
Output capacitance	C _{oes}	V _{CE} =10V		250		
Reverse Transfer capacitance	C _{res}	f=1MHz		80		
Switching Time	Turn-on Time	t _{ON}	V _{CC} =600V		1.2	μs
		t _r	I _C =10A		0.6	
	Turn-off Time	t _{OFF}	V _{GE} =±15V		1.5	
		t _f	R _G =160Ω		0.5	
	Turn-on Time	t _{ON}	V _{CC} =600V	0.16		μs
		t _r	I _C =10A	0.11		
	Turn-off Time	t _{OFF}	V _{GE} =+15V	0.30		
		t _f	R _G =16Ω		0.5	
Diode Forward On-Voltage	V _F	I _F =10A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =10A, V _{GE} =-10V, di/dt=100A/μs			350	ns

• Thermal Characteristics


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.92	°C/W
	R _{th(j-e)}	Diode			1.47	

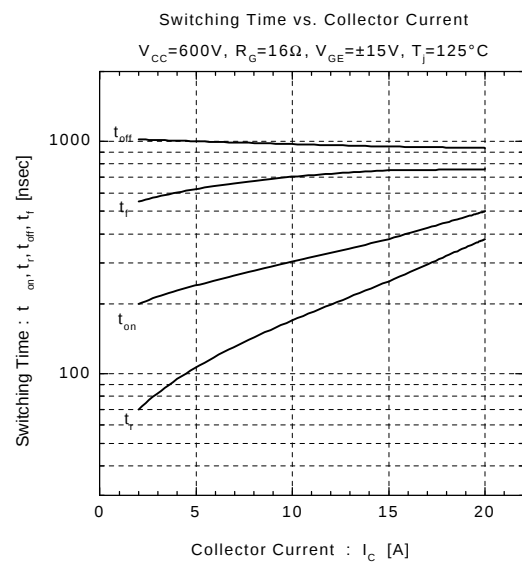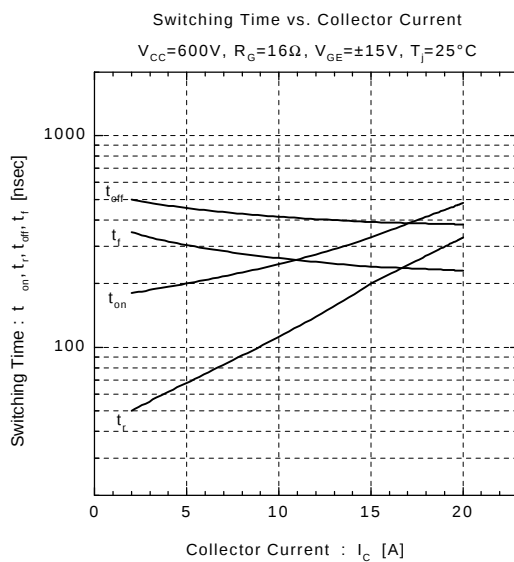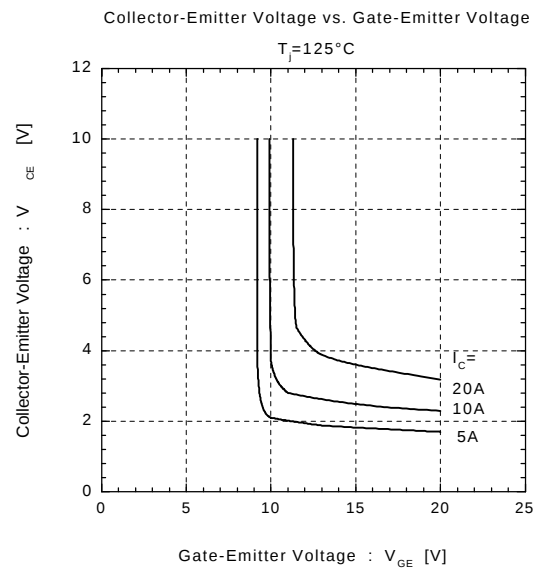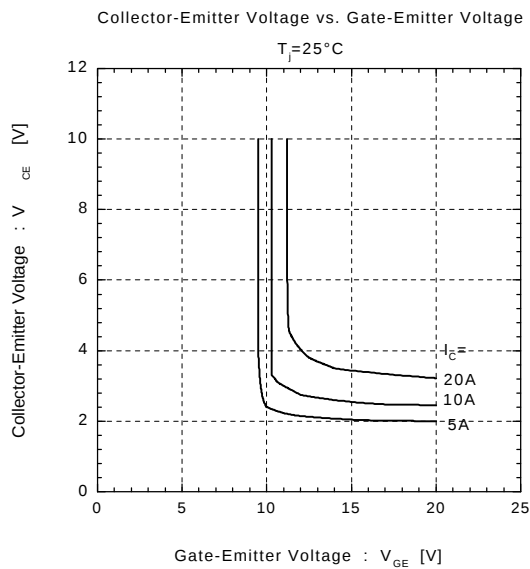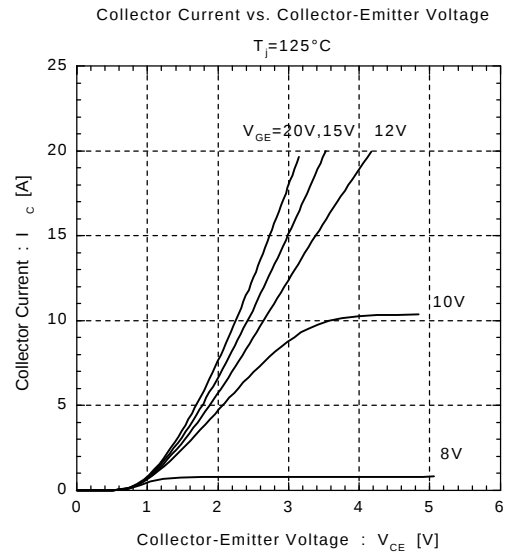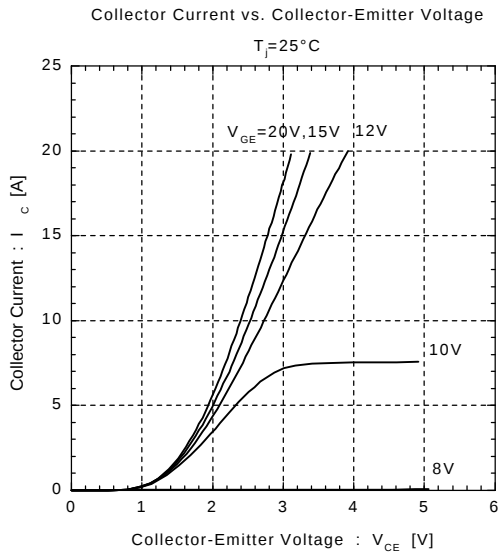

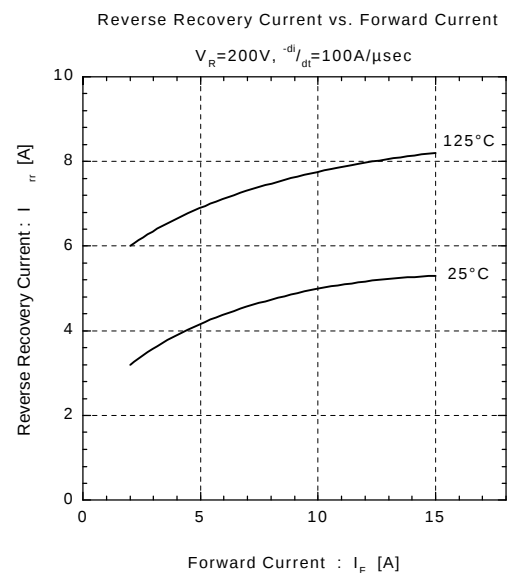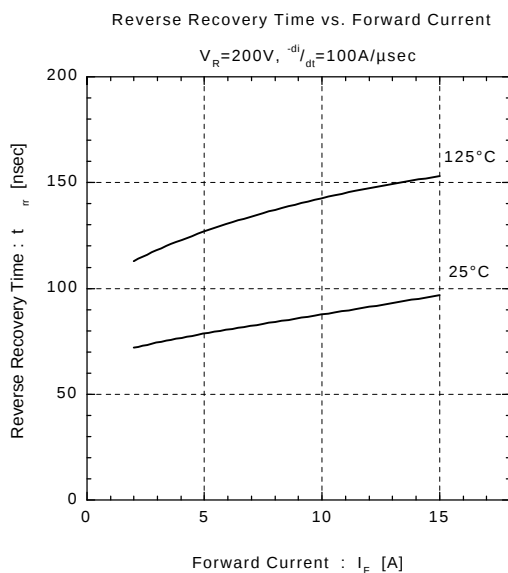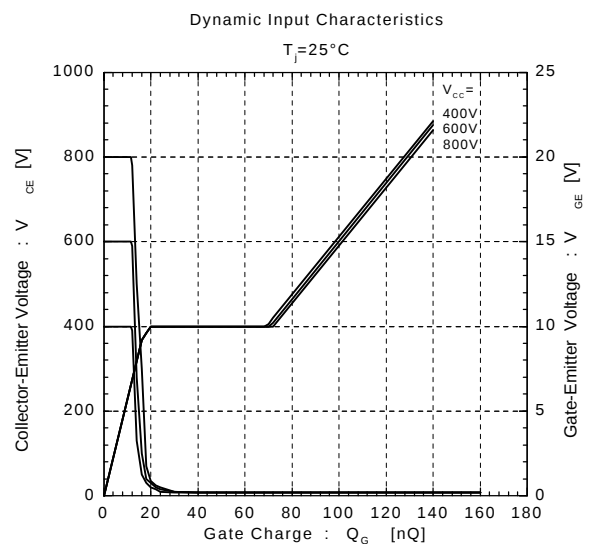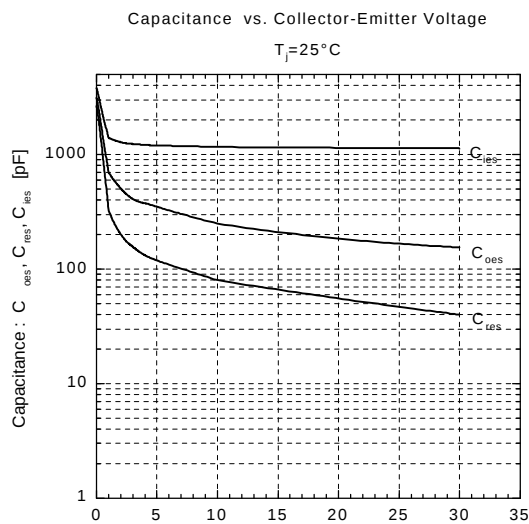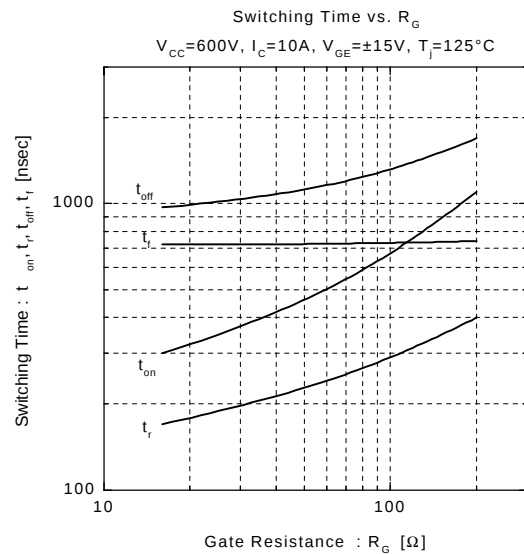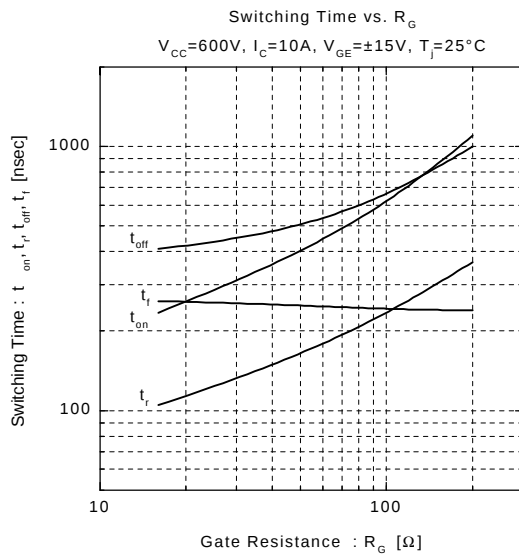


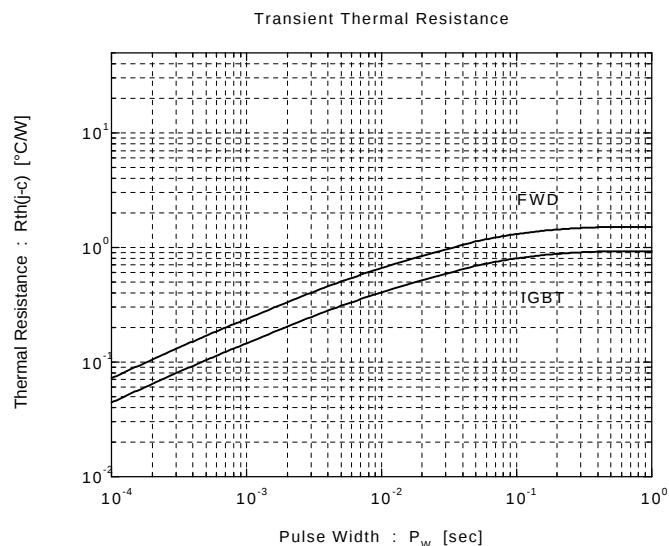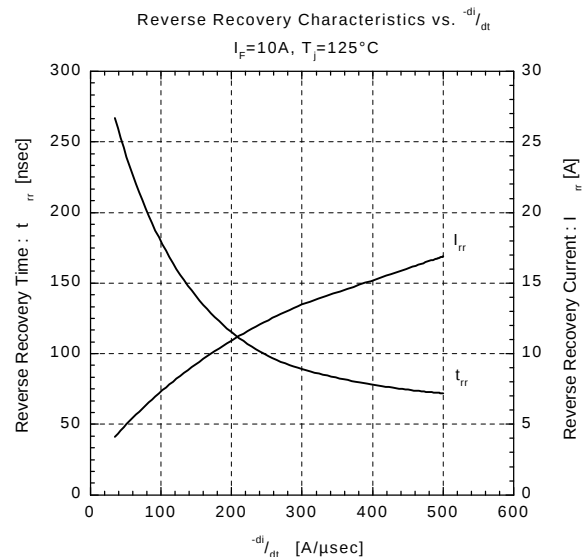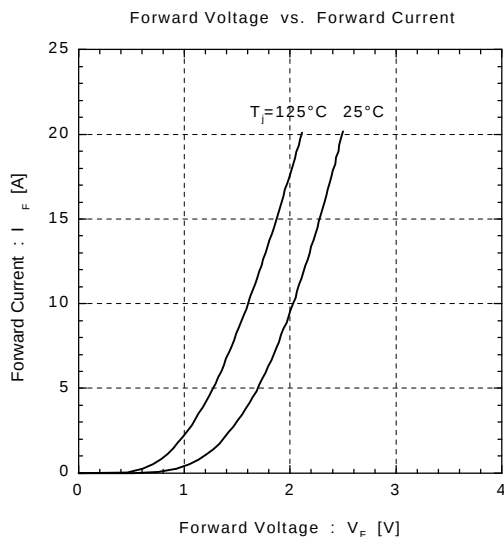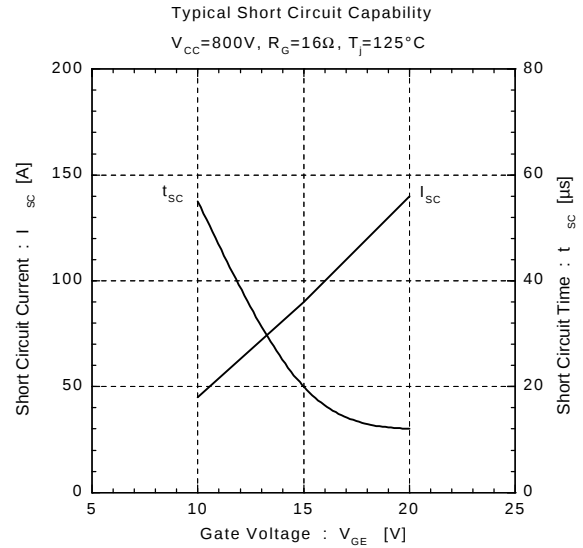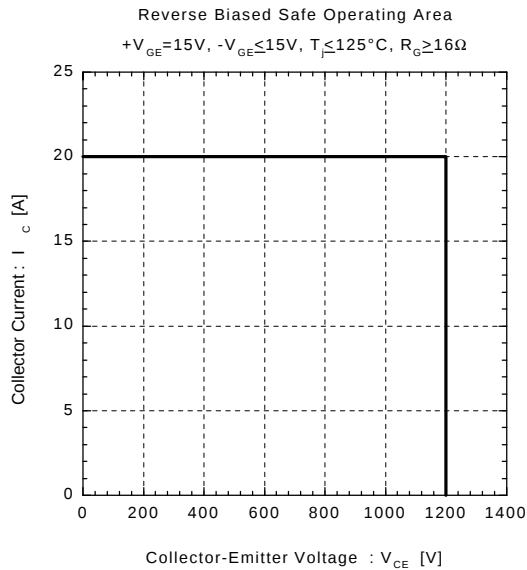


Switching losses (E_{on} , E_{off} vs. I_c)

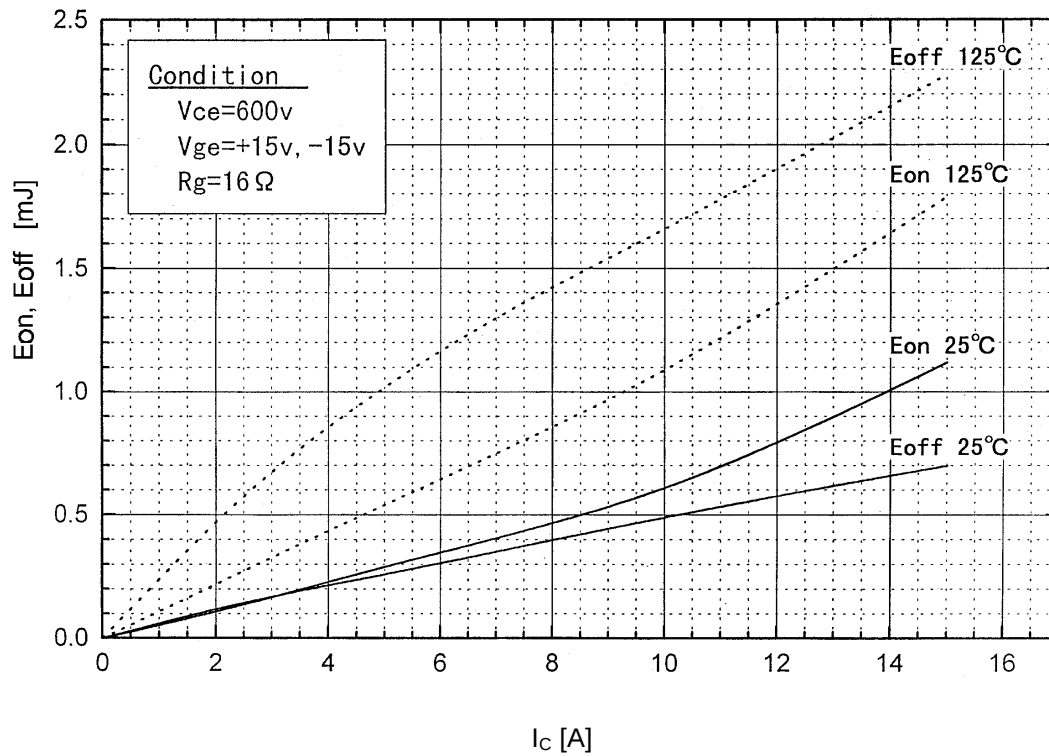


Test Circuit



Switching waveforms

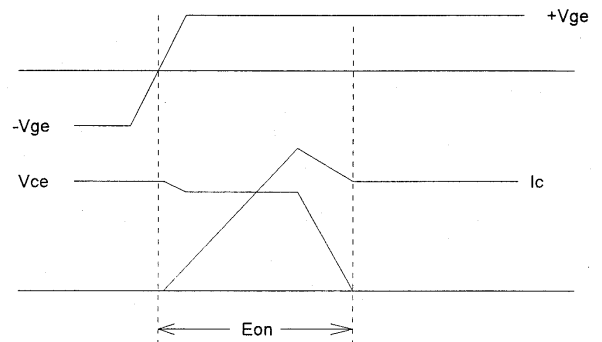

Turn-on Waveforms

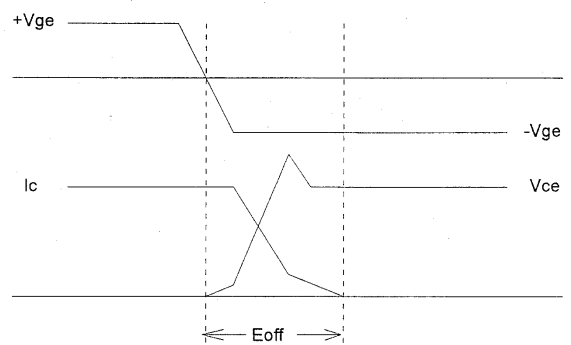

Turn-off Waveforms