

SPECIFICATION

DEVICE NAME : IGBT

TYPE NAME : 1MBH05D-120

SPEC. No. :

DATE :


Fuji Electric Co.,Ltd.

This Specification is subject to change without notice.

	DATE	NAME	APPROVED		Fuji Electric Co.,Ltd.	
DRAWN					DWG.NO.	
CHECKED						
					1/12	a

1 MBH 0 5 D - 1 2 0

2. Equivalent circuit

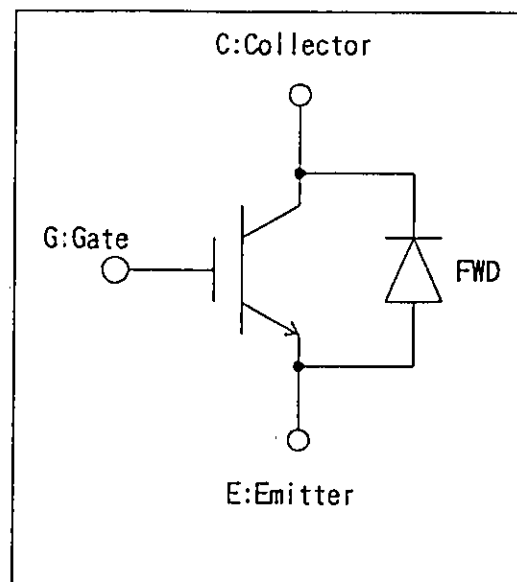

- ① GATE
② COLLECTOR
③ EMITTER

Items			Symbols	Ratings	Units
Collector-Emitter Voltage			V_{CES}	1200	V
Gate-Emitter Voltage			V_{GES}	± 20	V
Collector Current	DC	$T_c=25\text{ }^{\circ}\text{C}$	I_{C25}	10	A
		$T_c=105^{\circ}\text{C}$	I_{C105}	5	A
	1ms	$T_c=25\text{ }^{\circ}\text{C}$	I_{cp}	27	A
IGBT Max. Power Dissipation			P_c	115	W
FWD Max. Power Dissipation			P_c	75	W
Operating Temperature			T_j	+ 150	$^{\circ}\text{C}$
Storage Temperature			T_{stg}	-40 ~ +150	$^{\circ}\text{C}$
Mounting Screw Torque			—	70	N · cm

4. Electrical Characteristics (at Tc=25°C unless otherwise specified)

Items		Symbols	Characteristics			Conditions	Unit
			min.	typ.	max.		
Zero gate voltage Collector Current		I_{CES}			1.0	$V_{GE} = 0V$ $V_{CE} = 1200V$	mA
Gate-Emitter leakage Current		I_{GES}			20	$V_{CE} = 0V$ $V_{GE} = \pm 20V$	μA
Gate-Emitter Threshold Voltage		$V_{GE(th)}$	5.5		8.5	$V_{CE} = 20V$ $I_C = 5mA$	V
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$			3.5	$V_{GE} = 15V$ $I_C = 5A$	V
Input capacitance		C_{ies}		650		$V_{GE} = 0V$	pF
Output capacitance		C_{oes}		150		$V_{CE} = 10V$	
Reverse transfer capacitance		C_{res}		40		$f = 1MHz$	
Switching Time	Turn-on time	t_{on}			1.2	$V_{CC} = 600V$ $I_C = 5 A$ $V_{GE} = \pm 15V$ $R_G = 330 \Omega$ (Half Bridge)	μs
		t_r			0.6		
	Turn-off time	t_{off}			1.5		
		t_f			0.5		
	Turn-on time	t_{on}		0.16		$V_{CC} = 600V$ $I_C = 5 A$ $V_{GE} = +15V$ $R_G = 33 \Omega$ (Half Bridge)	
		t_r		0.11			
	Turn-off time	t_{off}		0.30			
		t_f			0.50		
FWD forward voltage drop		V_F			3.0	$I_F = 5 A$	V
Reverse recovery time		t_{rr}			0.35	$I_F = 5 A, V_{GE} = -10V$ $V_R = 200V$ $di/dt = 100A/\mu s$	μs

5. Thermal resistance characteristics

Items		Symbols	Characteristics			Conditions	Unit
			min.	typ.	max.		
Thermal resistance		$R_{th(j-c)}$			1.08	IGBT	$^{\circ}C/W$
		$R_{th(j-c)}$			1.66	FWD	


Fuji Electric Co.,Ltd.

DWG.NO.


3/12

H04-004-03

Collector Current vs. Collector-Emitter Voltage
 $T_j = 25^\circ\text{C}$

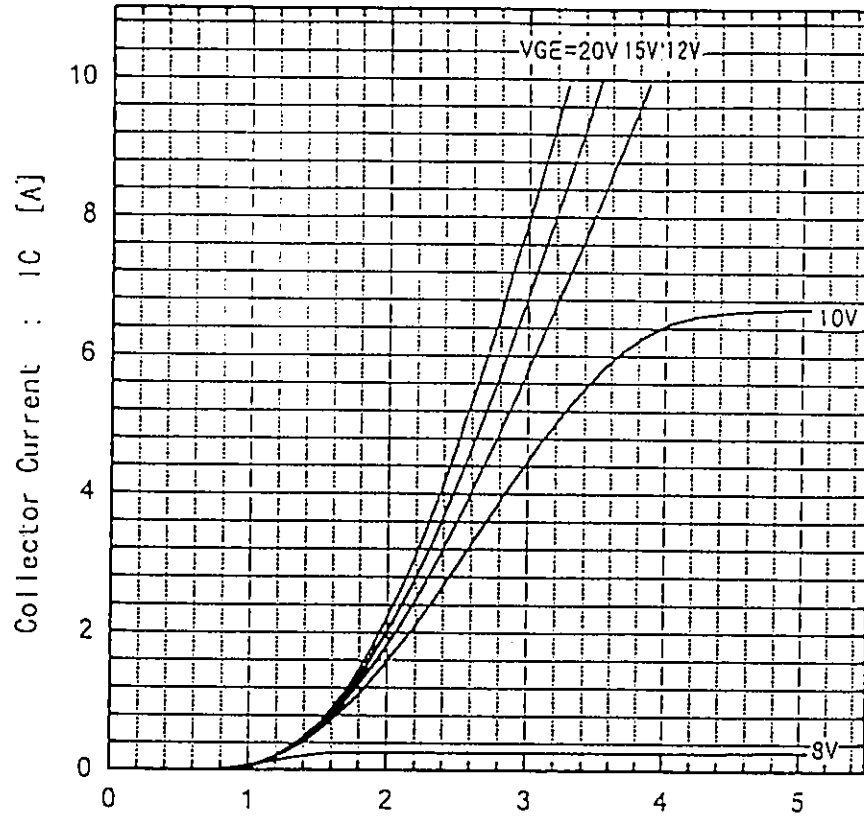


Collector Current vs. Collector-Emitter Voltage
 $T_j = 125^\circ\text{C}$

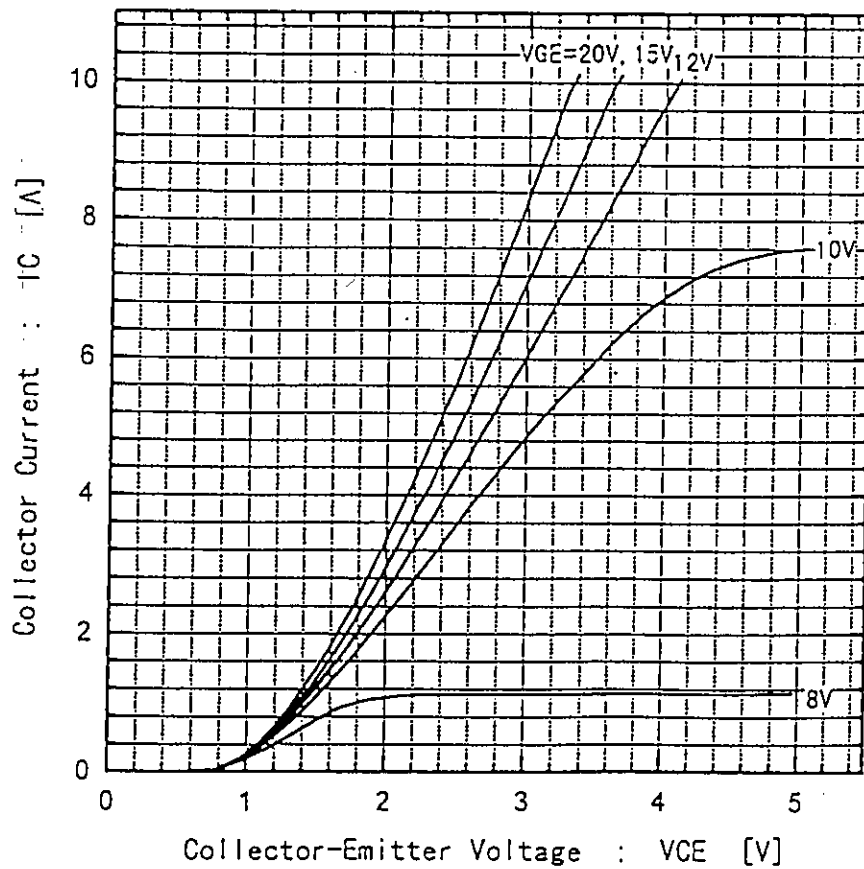


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Collector-Emitter Voltage vs Gate-Emitter Voltage
 $T_j = 25^\circ\text{C}$

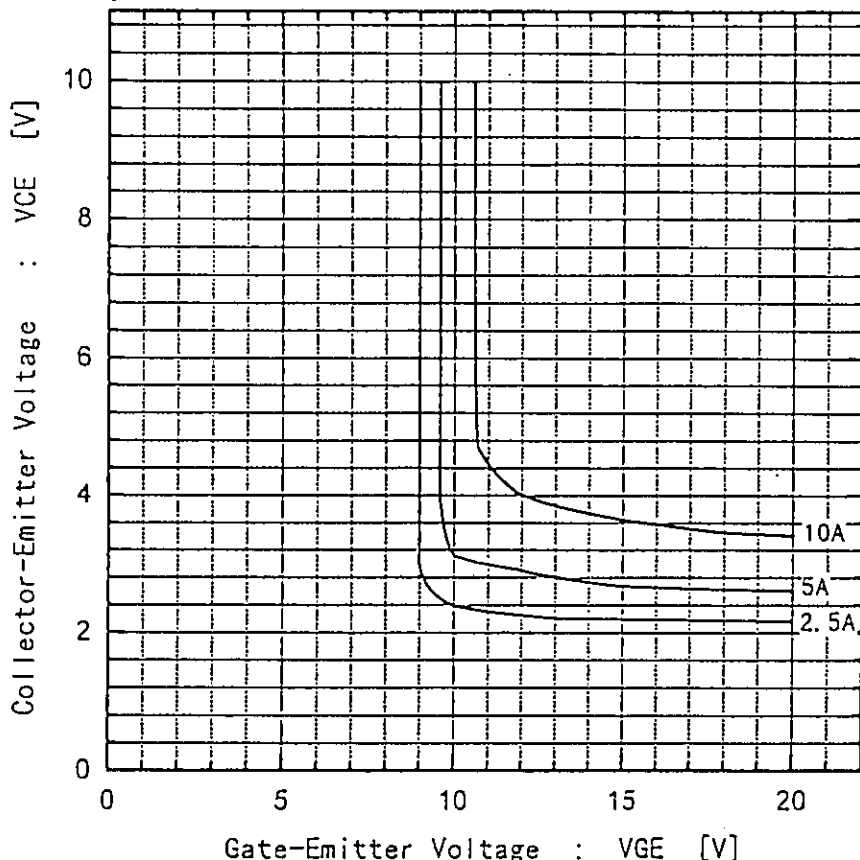

Collector-Emitter Voltage vs Gate-Emitter Voltage
 $T_j = 125^\circ\text{C}$

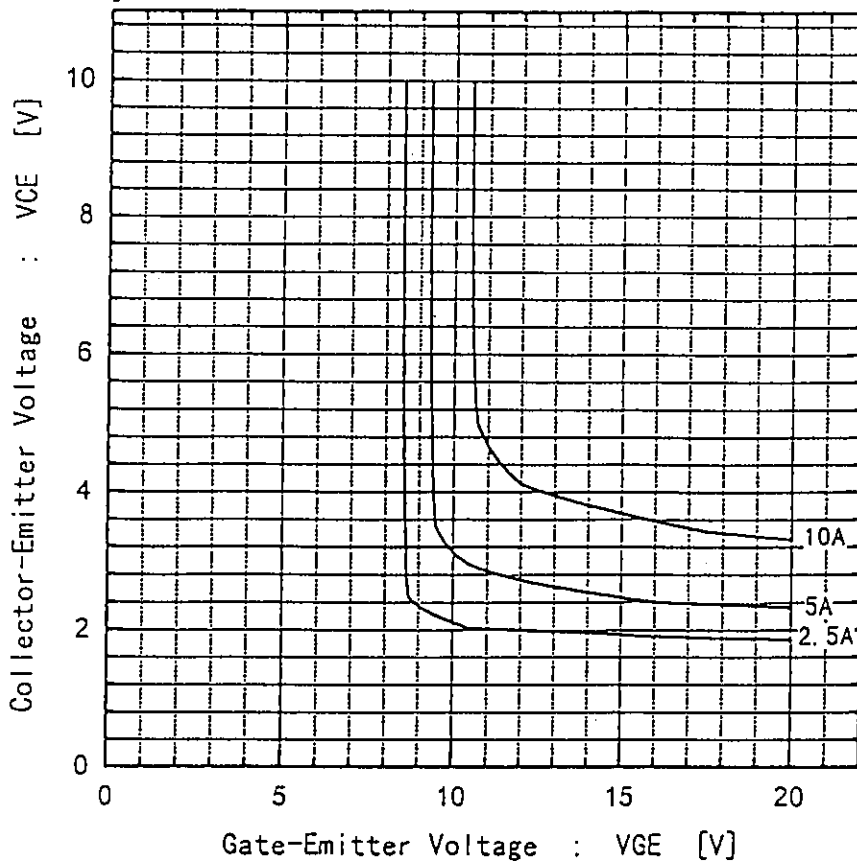


Fuji Electric Co., Ltd.

DWG. NO.


5/12

H04-004-03

Switching time vs. Collector current
 $V_{CC}=600V$, $R_G=33\Omega$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

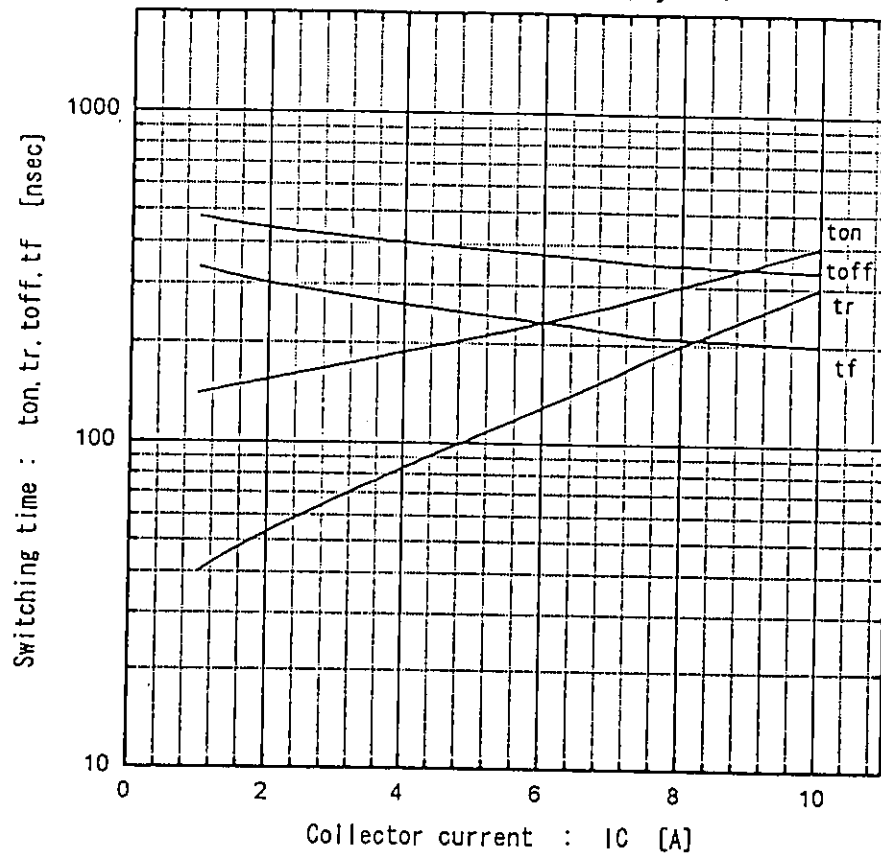


Switching time vs. Collector current
 $V_{CC}=600V$, $R_G=33\Omega$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

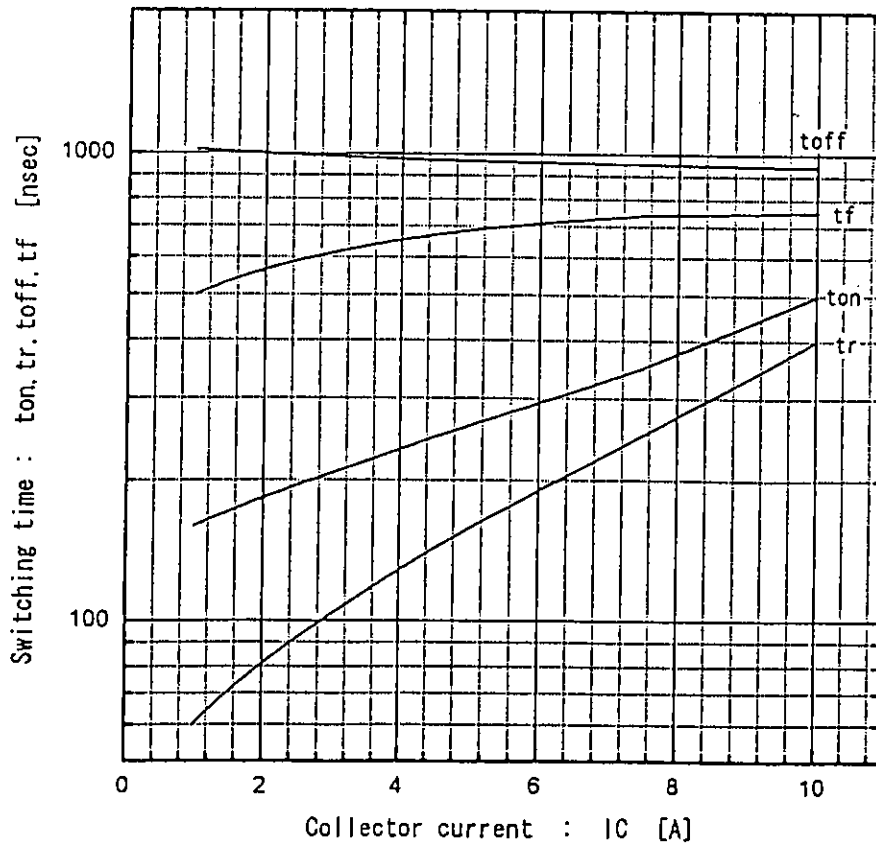


This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Switching time vs. R_G
 $V_{CC}=600V$, $I_C=5A$, $V_{GE}=\pm 15V$, $T_j=25^\circ C$

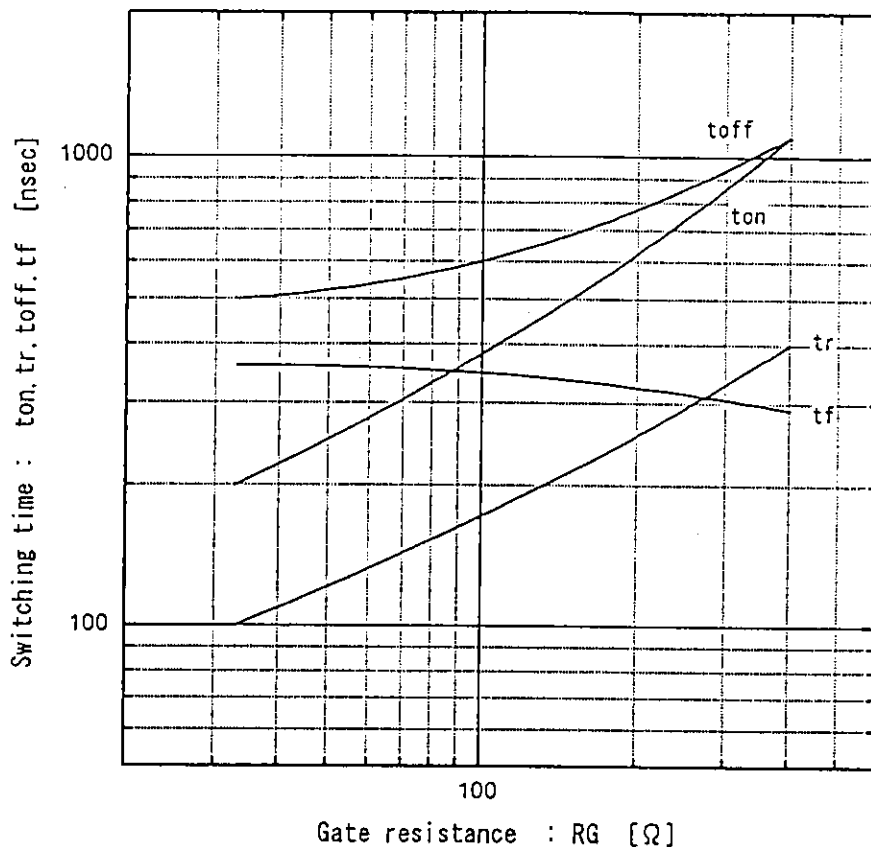

Switching time vs. R_G
 $V_{CC}=600V$, $I_C=5A$, $V_{GE}=\pm 15V$, $T_j=125^\circ C$

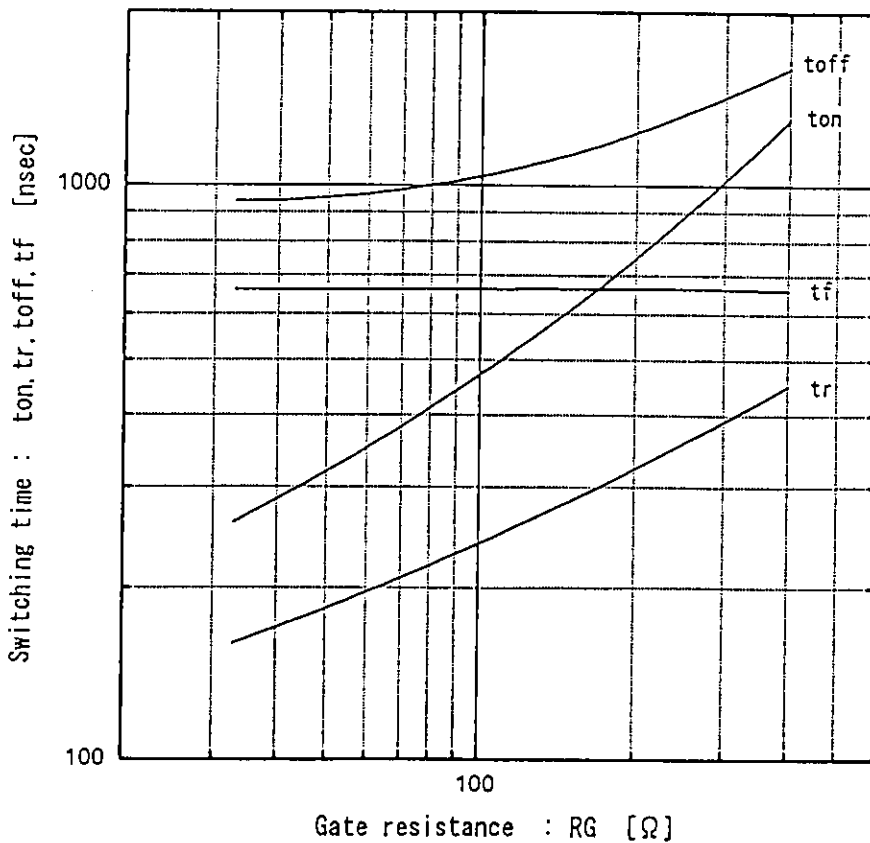

Fuji Electric Co., Ltd.

DWG. NO.


7/12

ax


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Dynamic input characteristics
 $T_j = 25^\circ\text{C}$

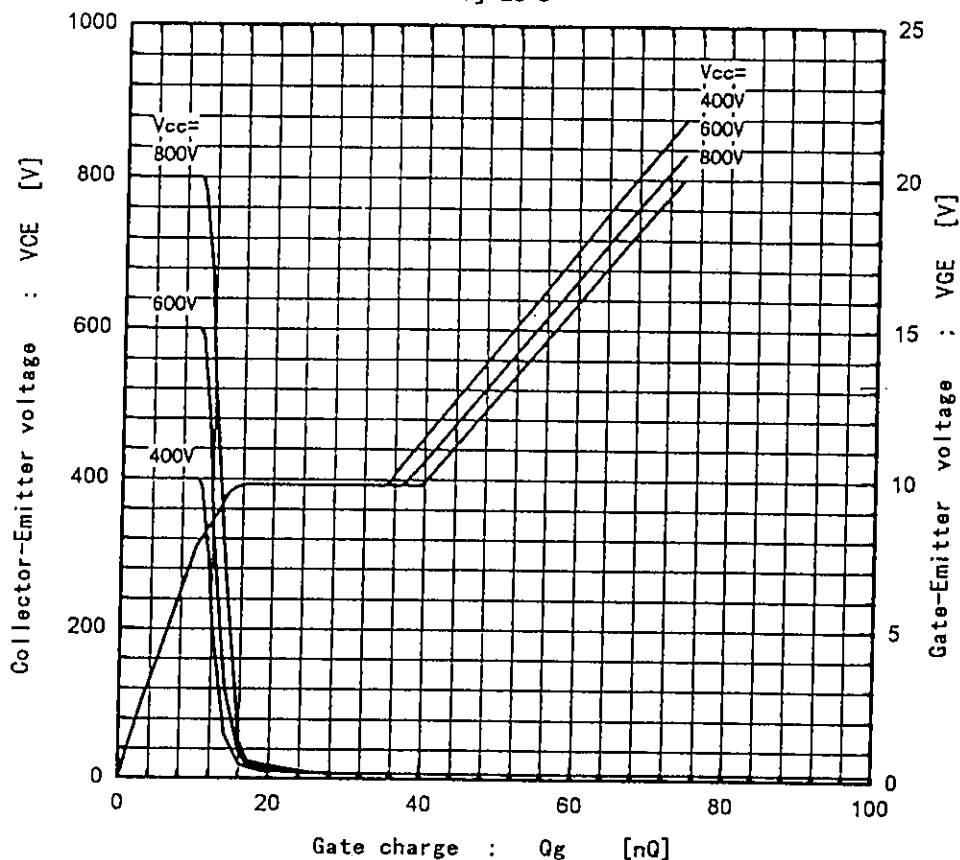

Capacitance vs. Collector-Emitter voltage
 $T_j = 25^\circ\text{C}$

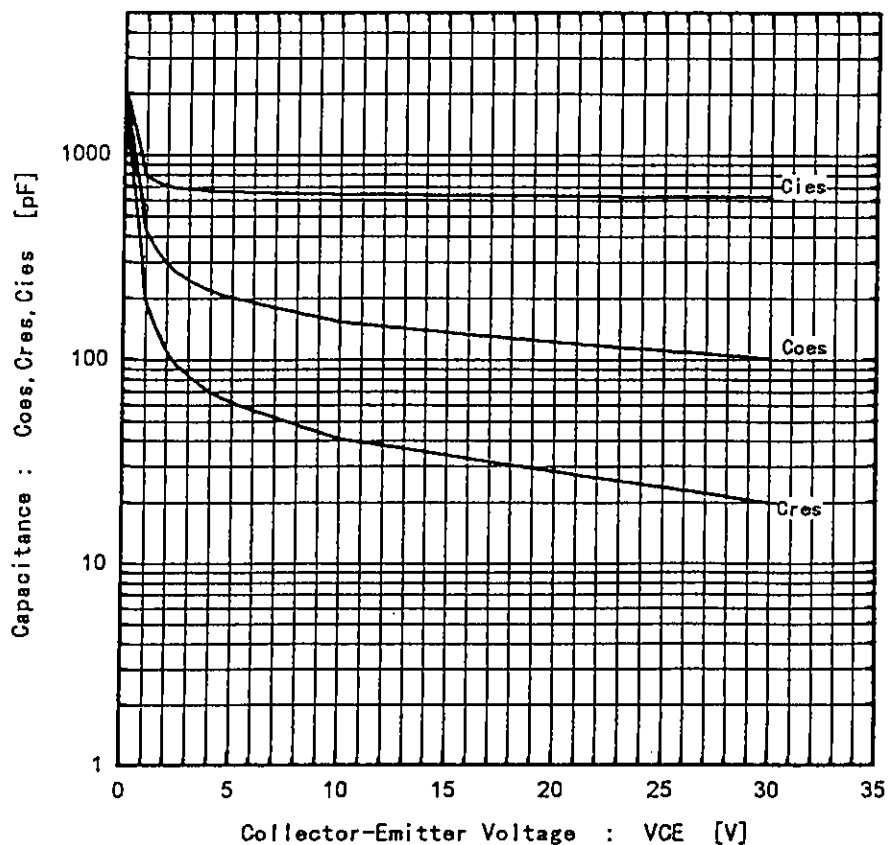

Fuji Electric Co., Ltd.


DWG. NO.

2/12


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Reverse Biased Safe Operating Area
 $+V_{GE}=15V, -V_{GE}\leq 15V, T_j\leq 125^{\circ}C, R_G\geq 33\Omega$

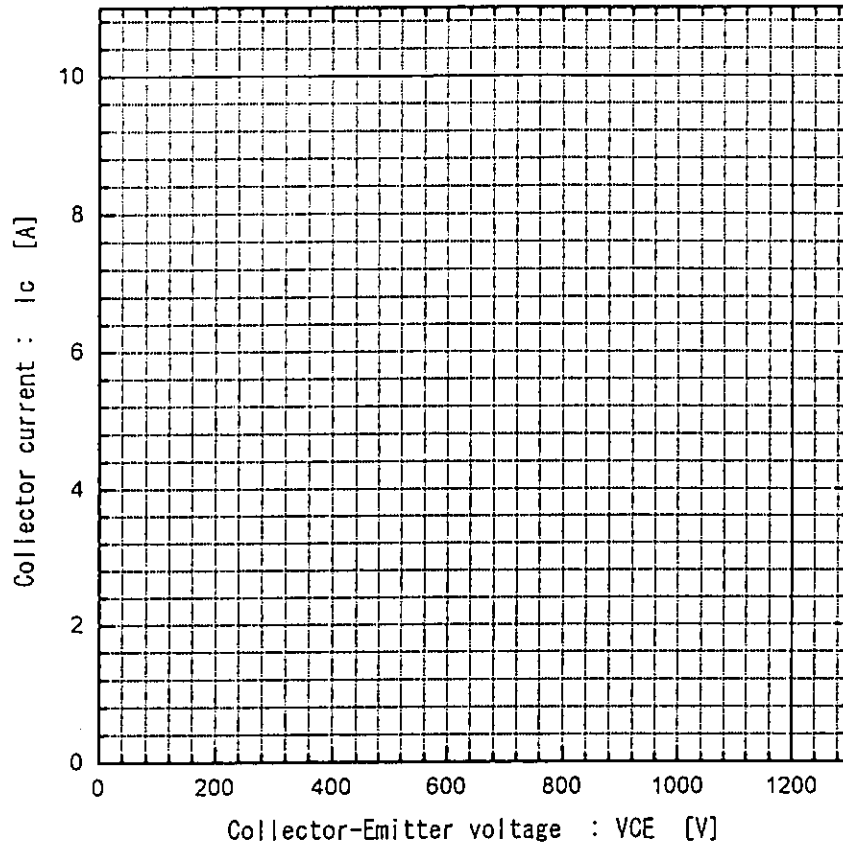

Typical short circuit capability
 $V_{CC}=800V, R_G=33\Omega, T_j=125^{\circ}C$

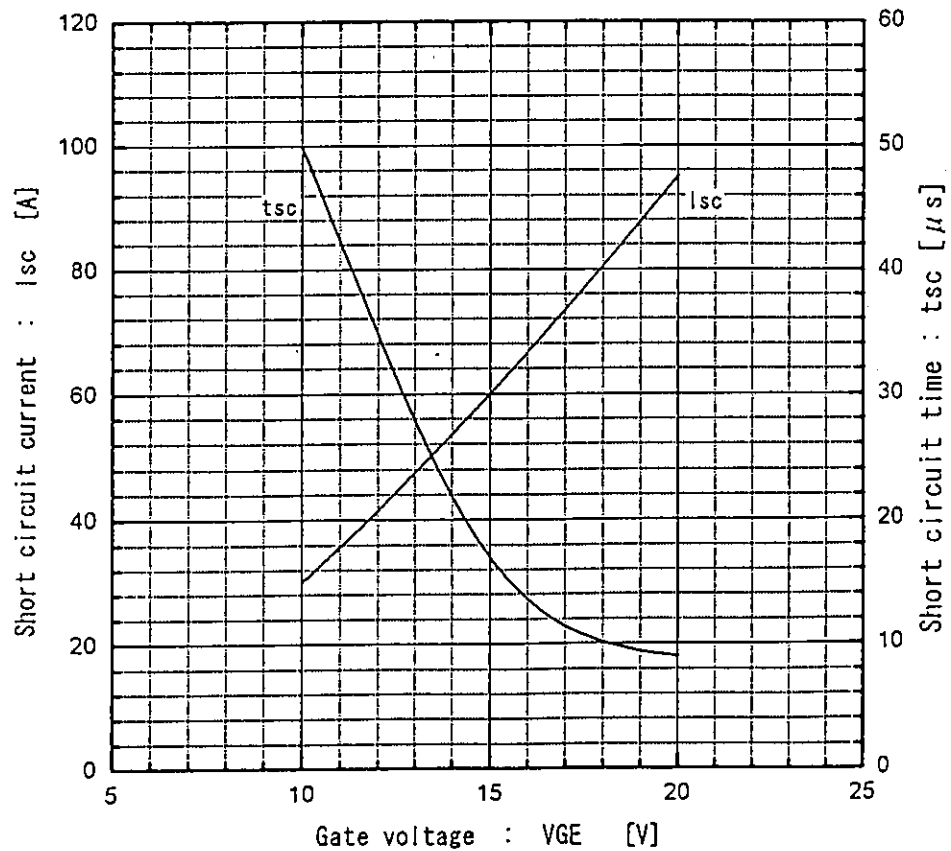

Fuji Electric Co., Ltd.

DWG. NO.


9/12

21


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Reverse recovery time vs. Forward current
 $V_R=200V, -di/dt=100A/\mu sec$

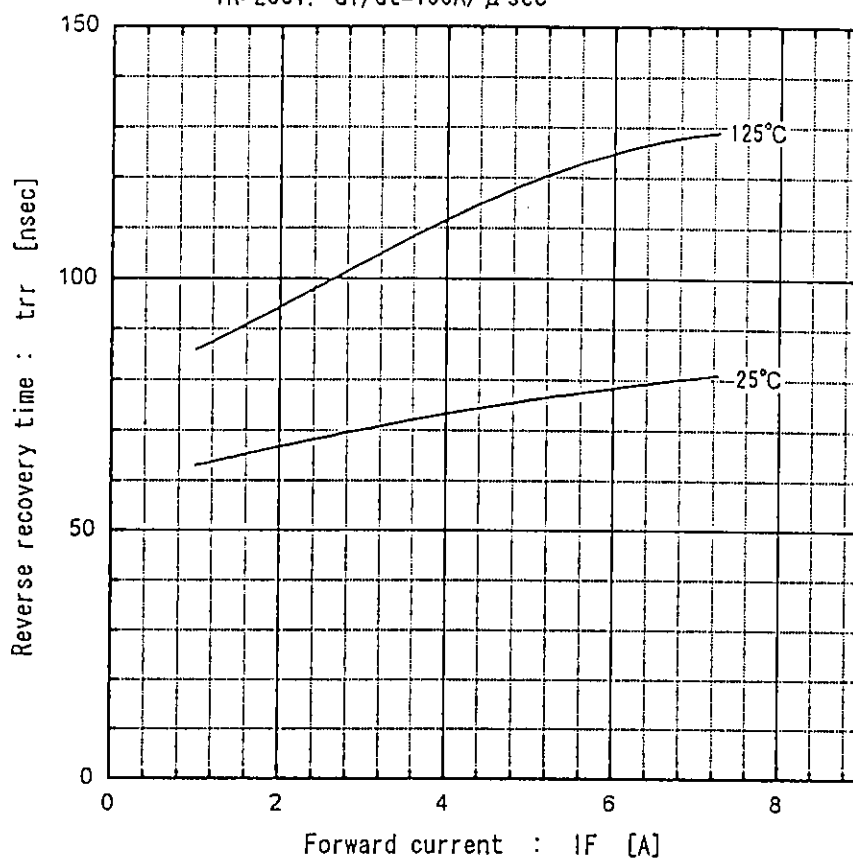

Reverse recovery current vs. Forward current
 $V_R=200V, -di/dt=100A/\mu sec$

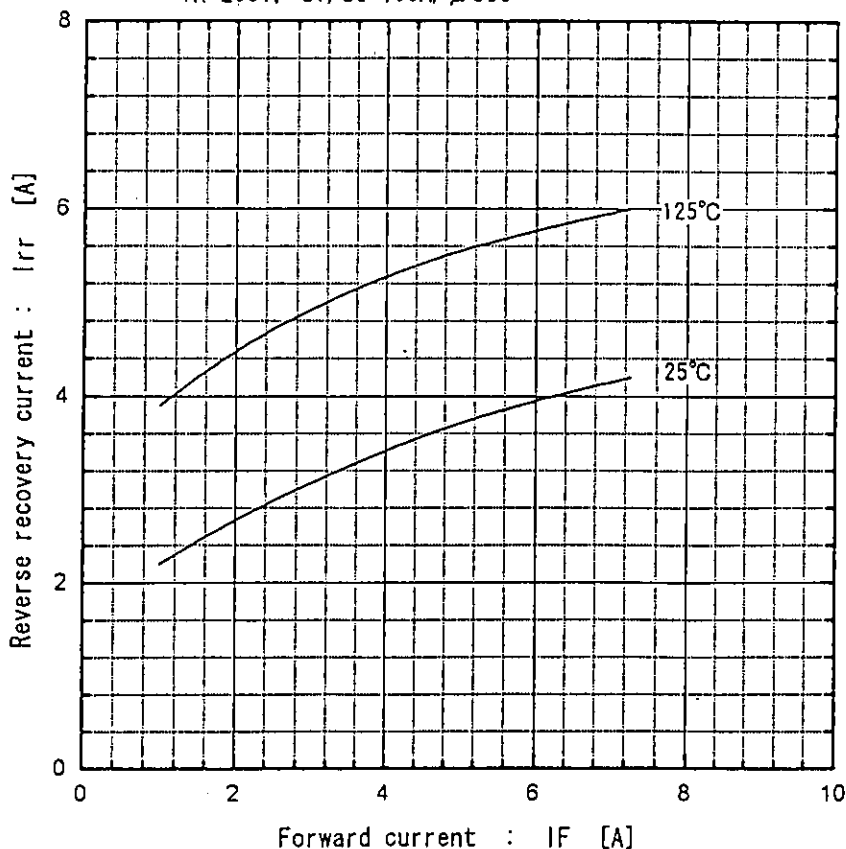

Fuji Electric Co., Ltd.

DWG. NO.


10/12

ar


H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Forward voltage vs. Forward current

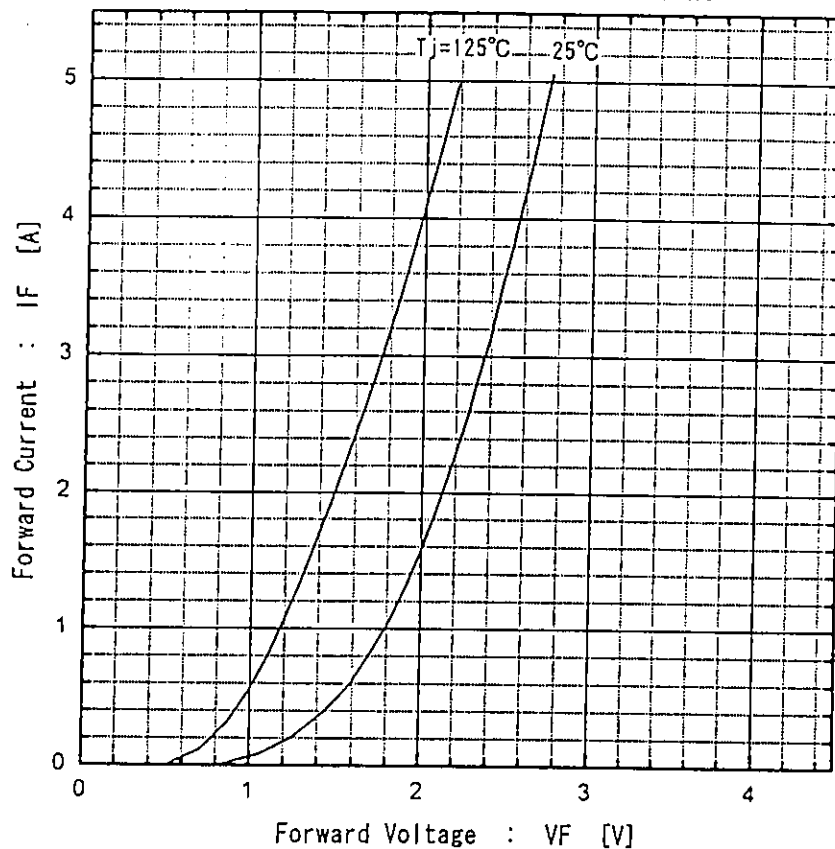

Reverse recovery characteristics vs. $-di/dt$
IF=5A, Tj=125°C

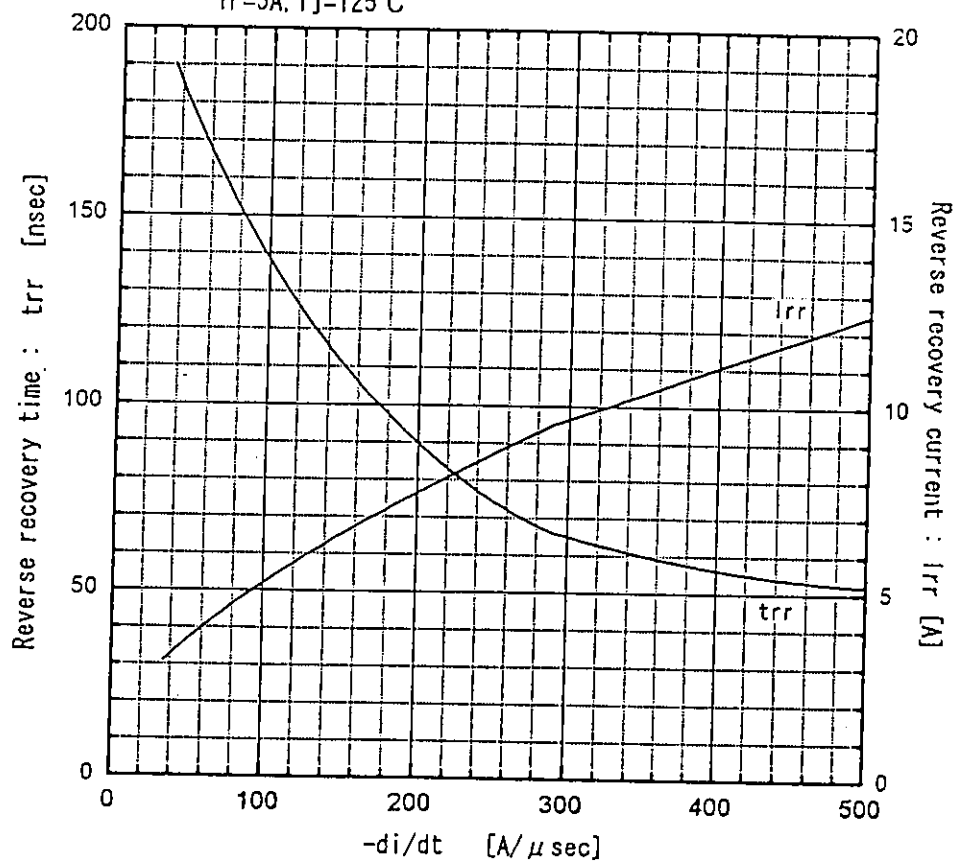

Fuji Electric Co., Ltd.


DWG. NO.

11/12

H04-004-03

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Transient thermal resistance

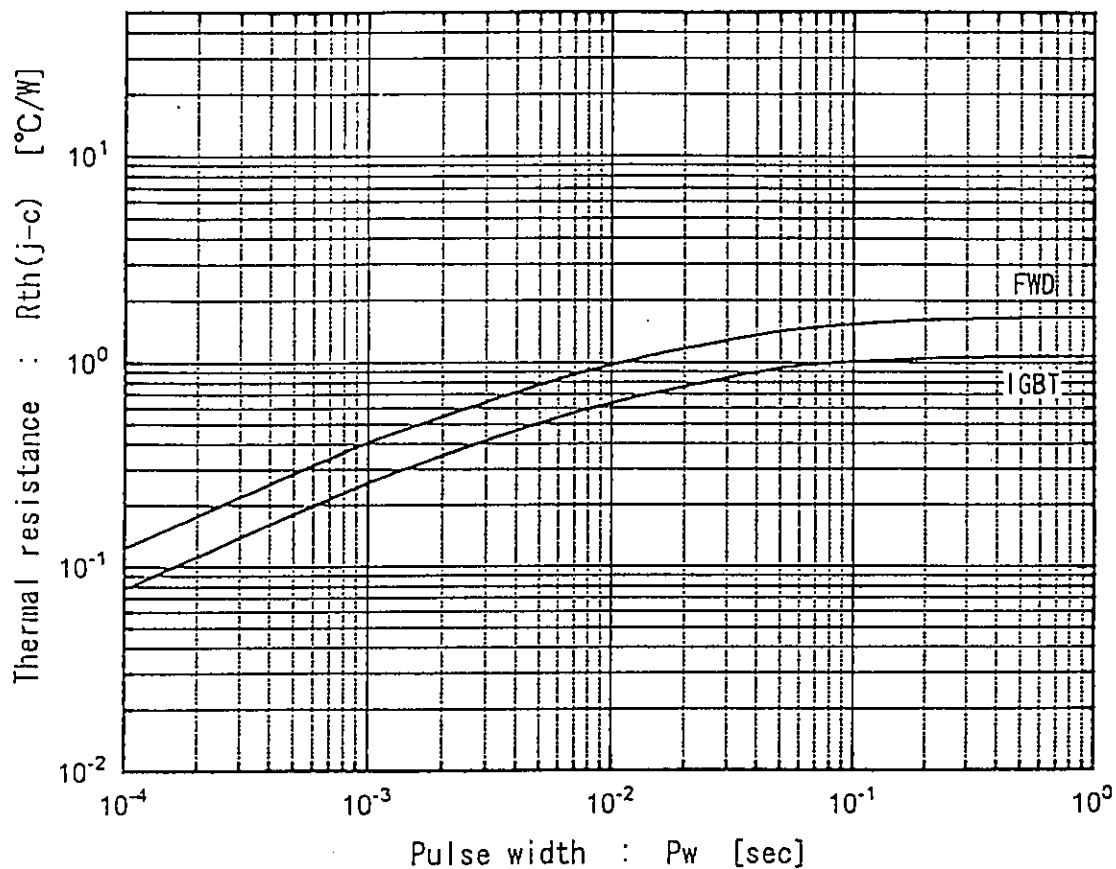

Fuji Electric Co., Ltd.

DWG. NO.

12/12

H04-004-03

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-233-1589

972-233-0481 Fax

<http://www.collmer.com>