


> Features

- High Speed Switching
- Low On-Resistance
- No Secondary Breakdown
- Low Driving Power
- High Voltage
- $V_{GS} = \pm 30V$ Guarantee
- Repetitive Avalanche Rated

> Applications

- Switching Regulators
- UPS
- DC-DC converters
- General Purpose Power Amplifier

> Outline Drawing

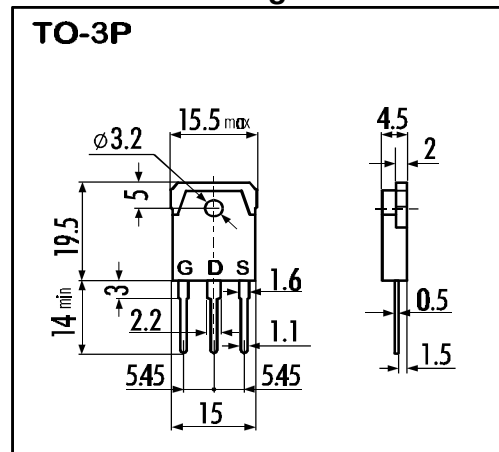


> Maximum Ratings and Characteristics

- Absolute Maximum Ratings ($T_c = 25^\circ C$), unless otherwise specified

Item	Symbol	Rating	Unit
Drain-Source-Voltage	V_{DS}	450	V
Continuous Drain Current	I_D	10	A
Pulsed Drain Current	$I_{D(puls)}$	40	A
Gate-Source-Voltage	V_{GS}	± 35	V
Repetitive or Non-Repetitive ($T_{jc} \leq 150^\circ C$)	I_{AR}	10	A
Avalanche Energy	E_{AS}	255	mJ
Max. Power Dissipation	P_D	100	W
Operating and Storage Temperature Range	T_{ch}	150	$^\circ C$
	T_{stg}	-55 ~ +150	$^\circ C$

> Equivalent Circuit

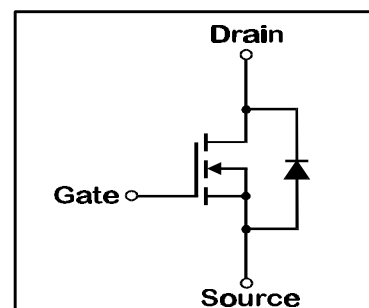

- Electrical Characteristics ($T_c = 25^\circ C$), unless otherwise specified

Item	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Drain-Source Breakdown-Voltage	$V_{(BR)DSS}$	$I_D = 1mA$ $V_{GS} = 0V$	450			V
Gate Threshold Voltage	$V_{GS(th)}$	$I_D = 1mA$ $V_{DS} = V_{GS}$	3,5	4,0	4,5	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 450V$ $T_{ch} = 25^\circ C$		10	500	μA
		$V_{GS} = 0V$ $T_{ch} = 125^\circ C$		0,2	1,0	mA
Gate Source Leakage Current	I_{GSS}	$V_{GS} = \pm 35V$ $V_{DS} = 0V$		10	100	nA
Drain Source On-State Resistance	$R_{DS(on)}$	$I_D = 5A$ $V_{GS} = 10V$		0,58	0,65	Ω
Forward Transconductance	g_{fs}	$I_D = 5A$ $V_{DS} = 25V$	3	6		S
Input Capacitance	C_{iss}	$V_{DS} = 25V$		950	1450	pF
Output Capacitance	C_{oss}	$V_{GS} = 0V$		180	270	pF
Reverse Transfer Capacitance	C_{rss}	$f = 1MHz$		80	120	pF
Turn-On-Time t_{on} ($t_{on} = t_{d(on)} + t_r$)	$t_{d(on)}$	$V_{CC} = 300V$		25	40	ns
	t_r	$I_D = 10A$		70	110	ns
Turn-Off-Time t_{off} ($t_{off} = t_{d(off)} + t_f$)	$t_{d(off)}$	$V_{GS} = 10V$		70	110	ns
	t_f	$R_{GS} = 10 \Omega$		50	80	ns
Avalanche Capability	I_{AV}	$L = 100\mu H$ $T_{ch} = 25^\circ C$	10			A
Diode Forward On-Voltage	V_{SD}	$I_F = 2I_{DR}$ $V_{GS} = 0V$ $T_{ch} = 25^\circ C$		1,1	1,65	V
Reverse Recovery Time	t_{rr}	$I_F = I_{DR}$ $V_{GS} = 0V$		400		ns
Reverse Recovery Charge	Q_{rr}	$-dI_F/dt = 100A/\mu s$ $T_{ch} = 25^\circ C$		5,0		μC

- Thermal Characteristics

Item	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Thermal Resistance	$R_{th(ch-a)}$	channel to air			35	$^\circ C/W$
	$R_{th(ch-c)}$	channel to case			1,25	$^\circ C/W$

N-channel MOS-FET			
450V	0,65Ω	10A	100W

2SK2639-01


FAP-IIS Series

FUJI
ELECTRIC

> Characteristics


Typical Output Characteristics

$I_D = f(V_{DS})$; 80μs pulse test; $T_{ch}=25^{\circ}C$

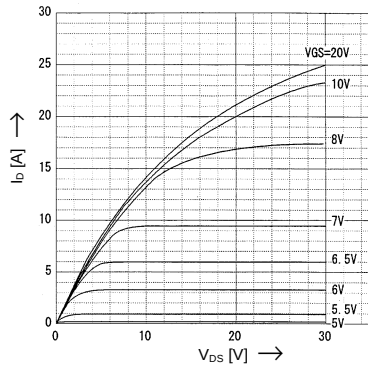


Drain-Source On-State Resistance vs. T_{ch}

$R_{DS(on)} = f(T_{ch})$; $I_D=5A$; $V_{GS}=10V$

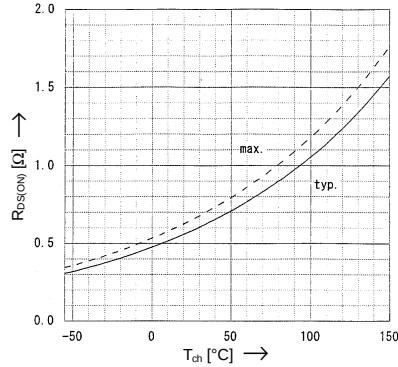


Typical Transfer Characteristics

$I_D = f(V_{GS})$; 80μs pulse test; $V_{DS}=25V$; $T_{ch}=25^{\circ}C$

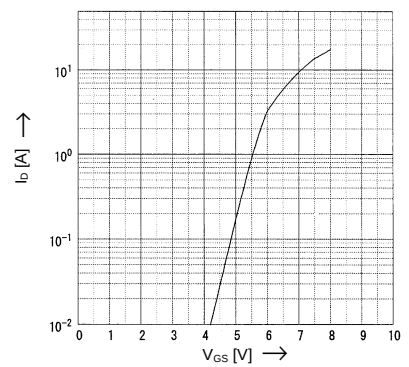


Typical Drain-Source On-State-Resistance vs. I_D

$R_{DS(on)} = f(I_D)$; 80μs pulse test; $T_{ch}=25^{\circ}C$

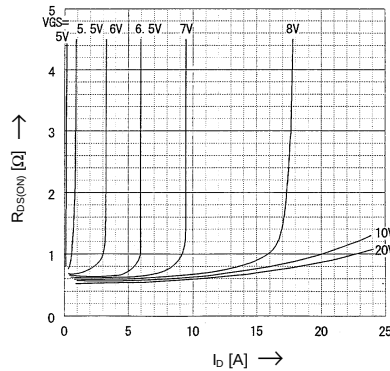


Typical Forward Transconductance vs. I_D

$g_{fs} = f(I_D)$; 80μs pulse test; $V_{DS}=25V$; $T_{ch}=25^{\circ}C$

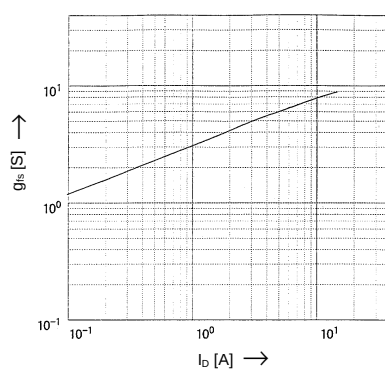


Gate Threshold Voltage vs. T_{ch}

$V_{GS(th)} = f(T_{ch})$; $I_D=1mA$; $V_{DS}=V_{GS}$

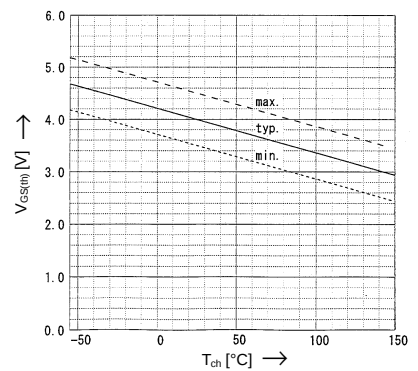


Typical Capacitances vs. V_{DS}

$C = f(V_{DS})$; $V_{GS}=0V$; $f=1MHz$

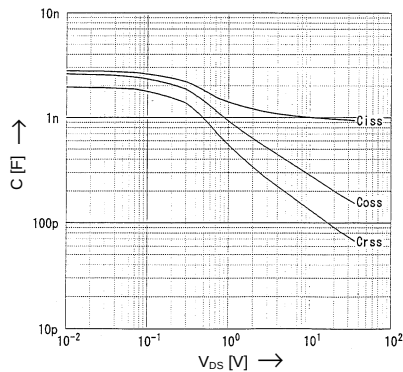


Typical Gate Charge Characteristic

$V_{GS} = f(Q_g)$; $I_D=10A$; $T_{ch}=25^{\circ}C$

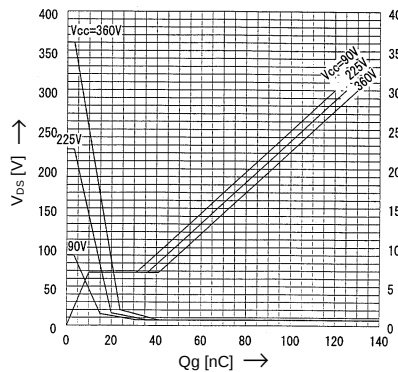


Forward Characteristics of Reverse Diode

$I_F = f(V_{SD})$; 80μs pulse test; $V_{GS}=0V$

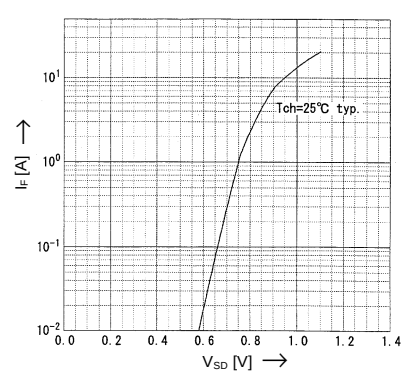


Avalanche Energy Derating

$E_{AS} = f(\text{starting } T_{ch})$; $V_{CC}=45V$; $I_{AV}=10A$

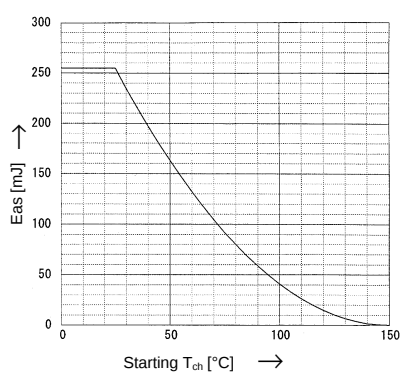

Safe Operation Area

$I_D = f(V_{DS})$; $D=0.01$; $T_{ch}=25^{\circ}C$

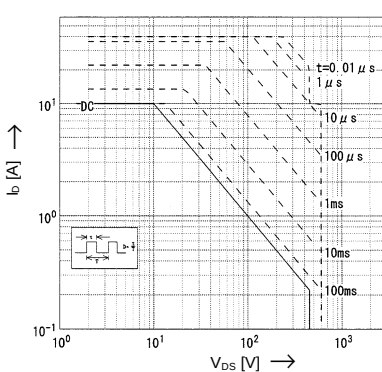

$Z_{th(ch-e)} [K/W]$

Transient Thermal impedance

$Z_{thch} = f(t)$ parameter: $D=t/T$

