

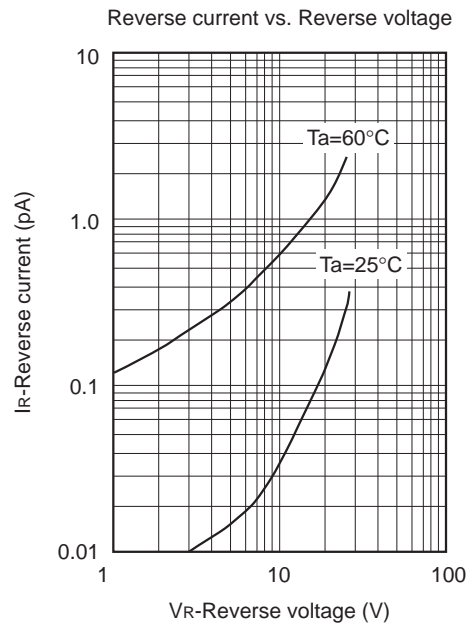
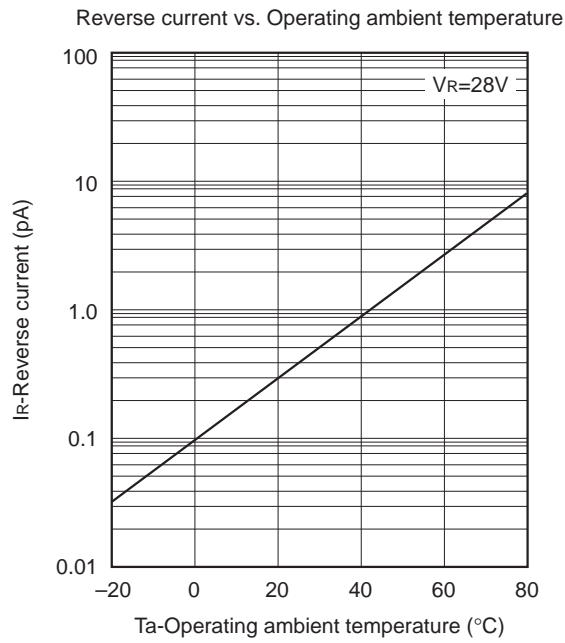
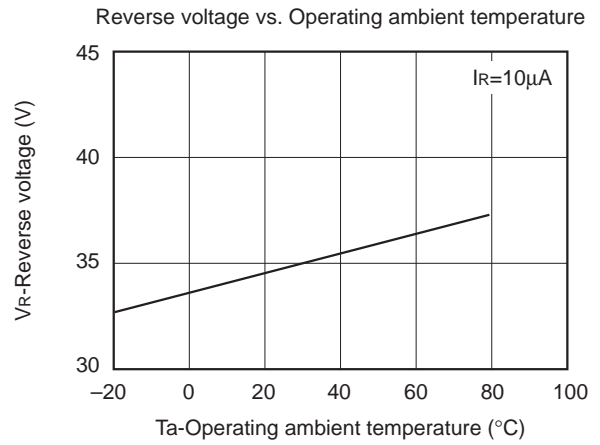



Example of Representative Characteristics

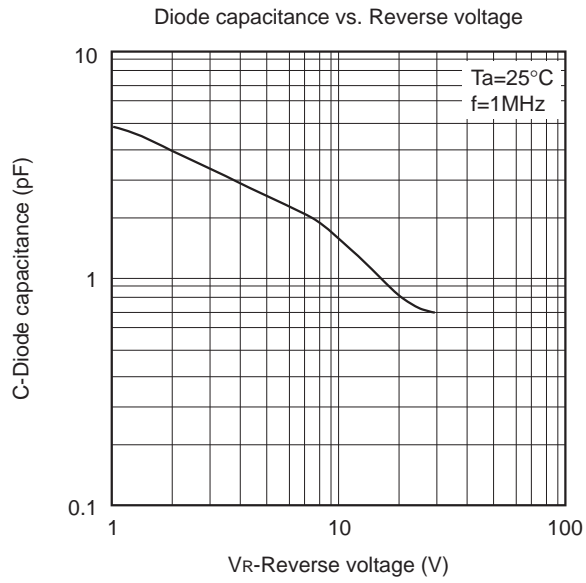


Serial resistance vs. Reverse voltage

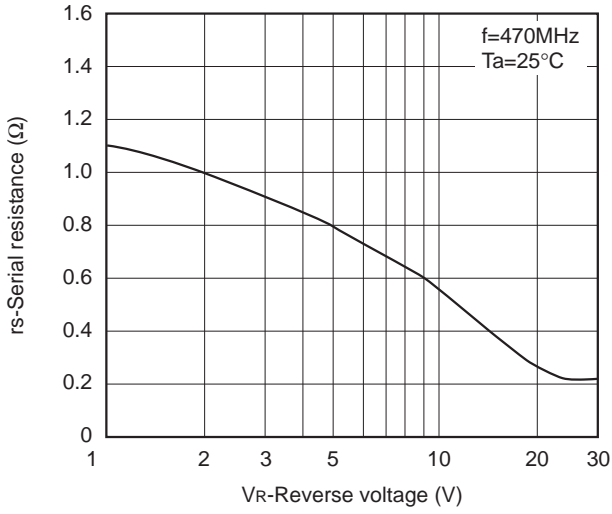


Serial resistance vs. Frequency

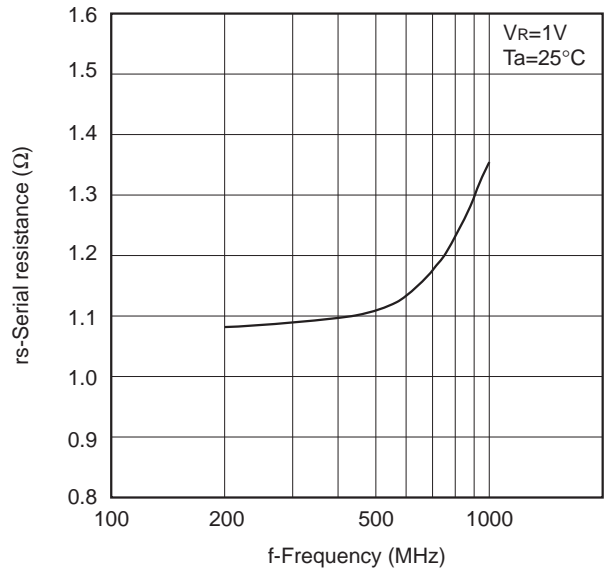

Diode capacitance vs. Operating ambient temperature

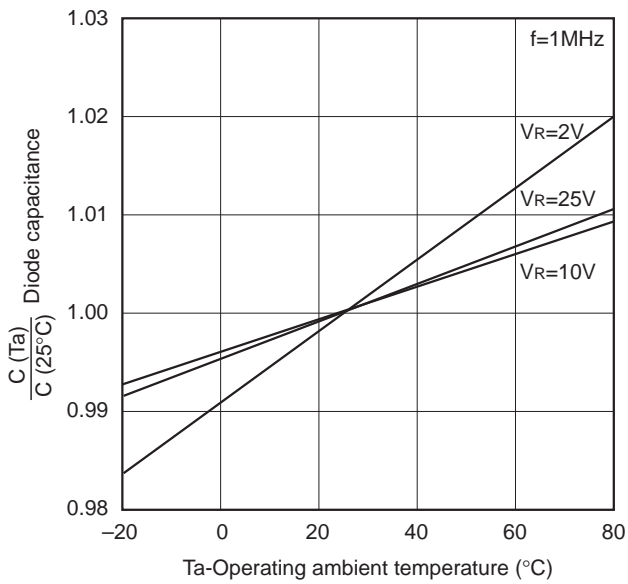


Temperature coefficient of diode capacitance

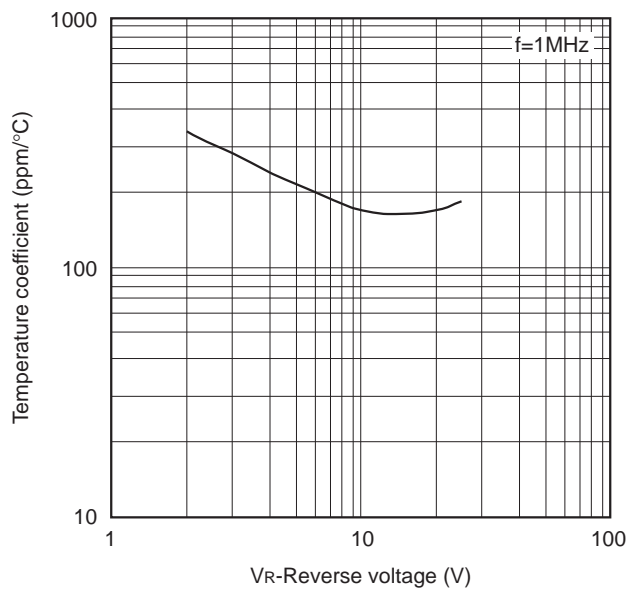

Package Outline Unit : mm

M-235

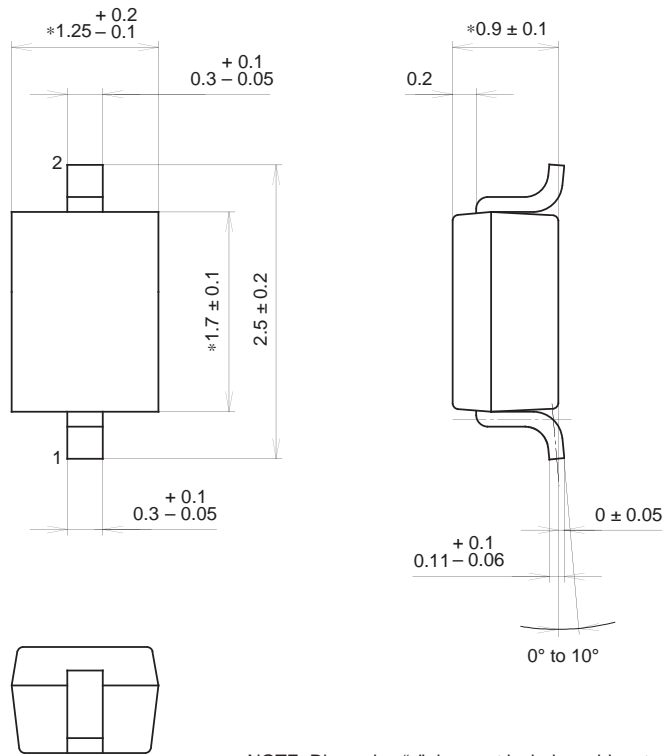


NOTE: Dimension "*" does not include mold protrusion.

| | |
|------------|-------|
| SONY CODE | M-235 |
| EIAJ CODE | _____ |
| JEDEC CODE | _____ |

| | |
|----------------|------|
| PACKAGE WEIGHT | 0.1g |
|----------------|------|

Marking



Notes

- 1) B: Lot No. (Year and Month of manufacture)
Year; Last one digit
Month; A, B, C (for Oct. to Dec.)
1 to 9 (for Jan. to Sept.)