


GENERAL PURPOSE APPLICATION.
SWITCHING APPLICATION.

MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	120	V
Collector-Emitter Voltage	V_{CEO}	80	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	100	mA
Emitter Current	I_E	-100	mA
Collector Power Dissipation	P_C	200	mW
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-65 ~ 150	℃

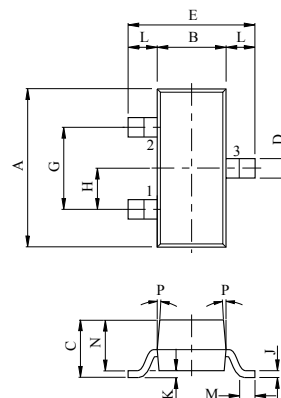


DIM	MILLIMETERS
A	2.93±0.20
B	1.30±0.20/-0.15
C	1.30 MAX
D	0.45±0.15/-0.05
E	2.40±0.30/-0.20
G	1.90
H	0.95
J	0.13±0.10/-0.05
K	0.00 ~ 0.10
L	0.55
M	0.20 MIN
N	1.00±0.20/-0.10
P	7°

1. EMITTER
2. BASE
3. COLLECTOR

SOT-23

Marking

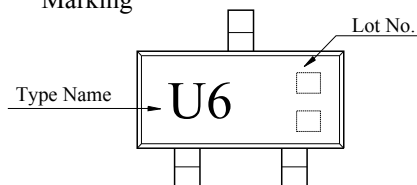

ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=4mA, I_B=0$	80	-	-	V
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	120	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5.0	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB}=90V, I_E=0$	-	-	100	nA
		$V_{CB}=90V, I_E=0, T_a=150^\circ C$	-	-	50	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V, I_C=0$	-	-	200	nA
DC Current Gain	h_{FE}	$V_{CE}=1V, I_C=1mA$	-	60	-	
		$V_{CE}=1V, I_C=4mA$	20	-	-	
		$V_{CE}=1V, I_C=10mA$	-	80	-	
		$V_{CE}=1V, I_C=20mA$	-	55	-	
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=4mA, I_B=0.4mA$	-	-	1.2	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=4mA, I_B=0.4mA$	-	-	0.15	V
		$I_C=50mA, I_B=15mA$	-	-	0.2	
Transition Frequency	f_T	$V_{CE}=10V, I_C=4mA, f=100MHz$	60	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V, I_E=0, f=1MHz$	-	-	5.0	pF