

SWITCHING TYPE POWER SUPPLY APPLICATIONS.

FEATURES


- Ultra-Fast Recovery Time for High Efficiency.
- Low Profile Surface Mount Package.
- Low Forward Voltage Drop, High current Capability, and Low Power Loss.

APPLICATION


- Switching Power Supply.
- DC/DC Converter.
- Home Appliances, Office Equipment.
- Telecommunication, Factory Automation.

MAXIMUM RATING (Ta=25 °C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	V
Average Output Rectitified Current	I_O	1	A
Peak One Cycle Surge Forward Current (Non-Repetitive 60Hz)	I_{FSM}	33	A
Junction Temperature	T_j	-40 ~ 150	°C
Storage Temperature Range	T_{stg}	-40 ~ 150	°C

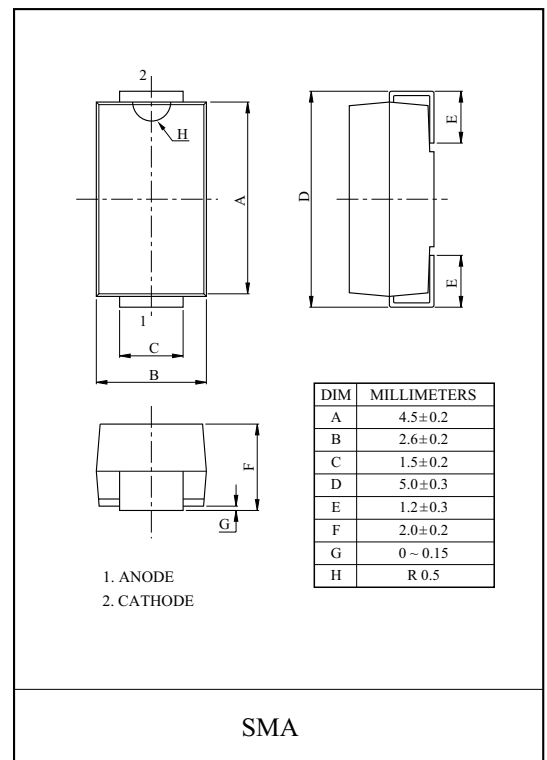

Marking

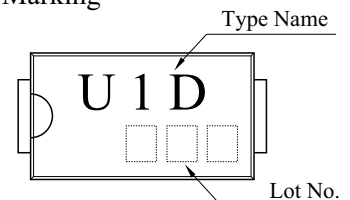


ELECTRICAL CHARACTERISTICS (Ta=25 °C)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage	V_{FM}	$I_{FM}=1.0A$	-	-	0.98	V
Repetitive Peak Reverse Current	I_{RRM}	V_{RRM} =Rated	-	-	10	μA
Reverse Recovery Time	t_{rr}	$I_F=100mA$, $I_R=200mA$	-	-	50	ns
Thermal Resistance	$R_{th(j-l)}$	Junction to lead	-	-	23	°C/W
	$R_{th(j-a)}$	Junction to ambient (on alumina substrate)	-	-	108	°C/W

SMAU1D


$I_F - V_F$

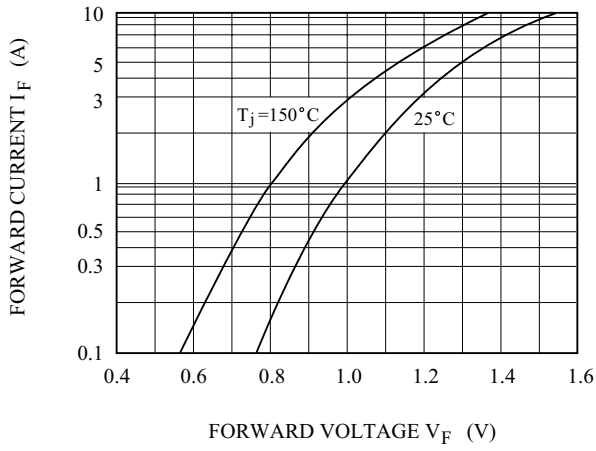

$P_{F(AV)} - I_{F(AV)}$

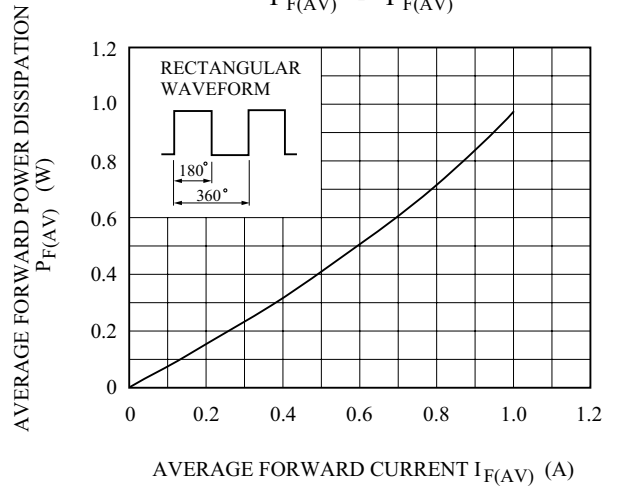

SURGE FORWARD CURRENT
(NON - REPETITIVE)

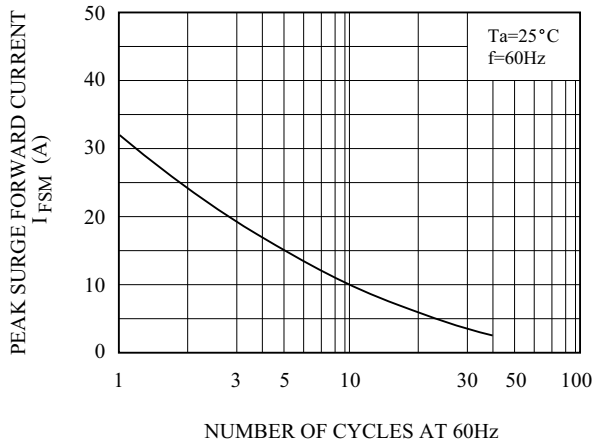

$T_a - I_{F(AV)}$

