

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

TC4520BP, TC4520BF, TC4520BFN


TC4520BP/BF/BFN DUAL BINARY UP COUNTER

TC4520B is up counters of 4 bit binary.


Since both of TC4520B contain two independent circuits of counters with the same functions in one package, counting or frequency division of two BCD digits or eight binary bits can be achieved with one IC. The counters can be reset to "0" ($Q_0 \sim Q_3 = "L"$) by giving "H" level signal to RESET input regardless of other inputs.

The counting condition is changed by the rising edge of CLOCK input if ENABLE="H" or by the falling edge of ENABLE if CLOCK="L".


(Note) The JEDEC SOP (FN) is not available in Japan.



P (DIP16-P-300-2.54A)
Weight : 1.00g (Typ.)



F (SOP16-P-300-1.27)
Weight : 0.18g (Typ.)




FN (SOL16-P-150-1.27)
Weight : 0.13g (Typ.)


MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
DC Supply Voltage	V_{DD}	$V_{SS} - 0.5 \sim V_{SS} + 20$	V
Input Voltage	V_{IN}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
Output Voltage	V_{OUT}	$V_{SS} - 0.5 \sim V_{DD} + 0.5$	V
DC Input Current	I_{IN}	± 10	mA
Power Dissipation	P_D	300 (DIP) / 180 (SOIC)	mW
Operating Temperature Range	T_{opr}	$-40 \sim 85$	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	$-65 \sim 150$	$^{\circ}\text{C}$


PIN ASSIGNMENT

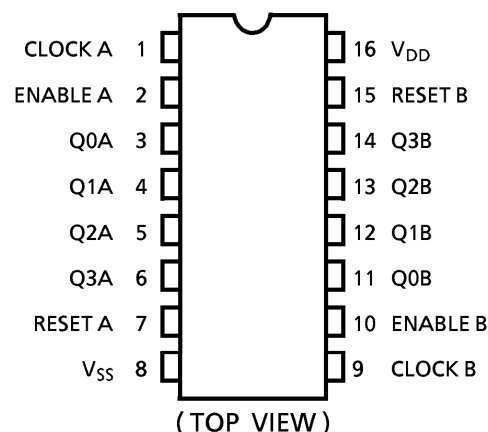

LOGIC DIAGRAM

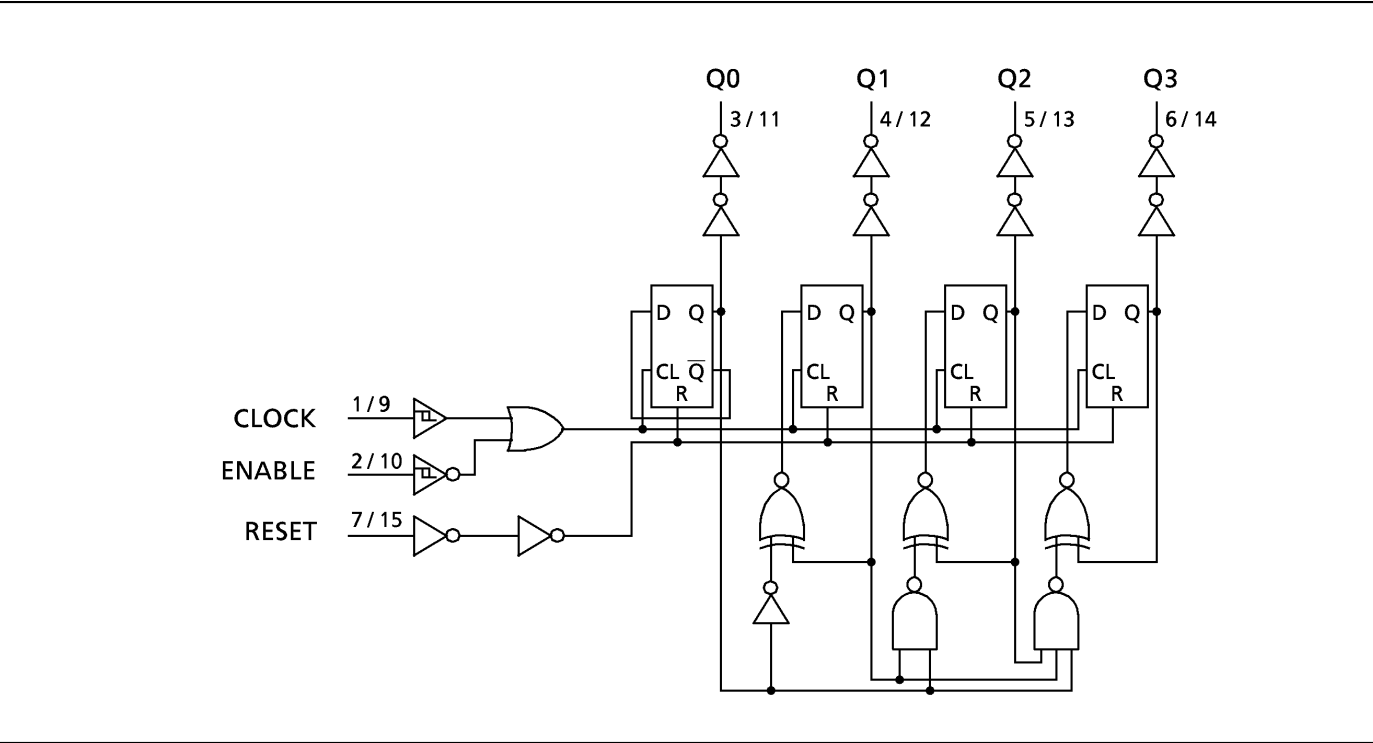

TIMING CHART

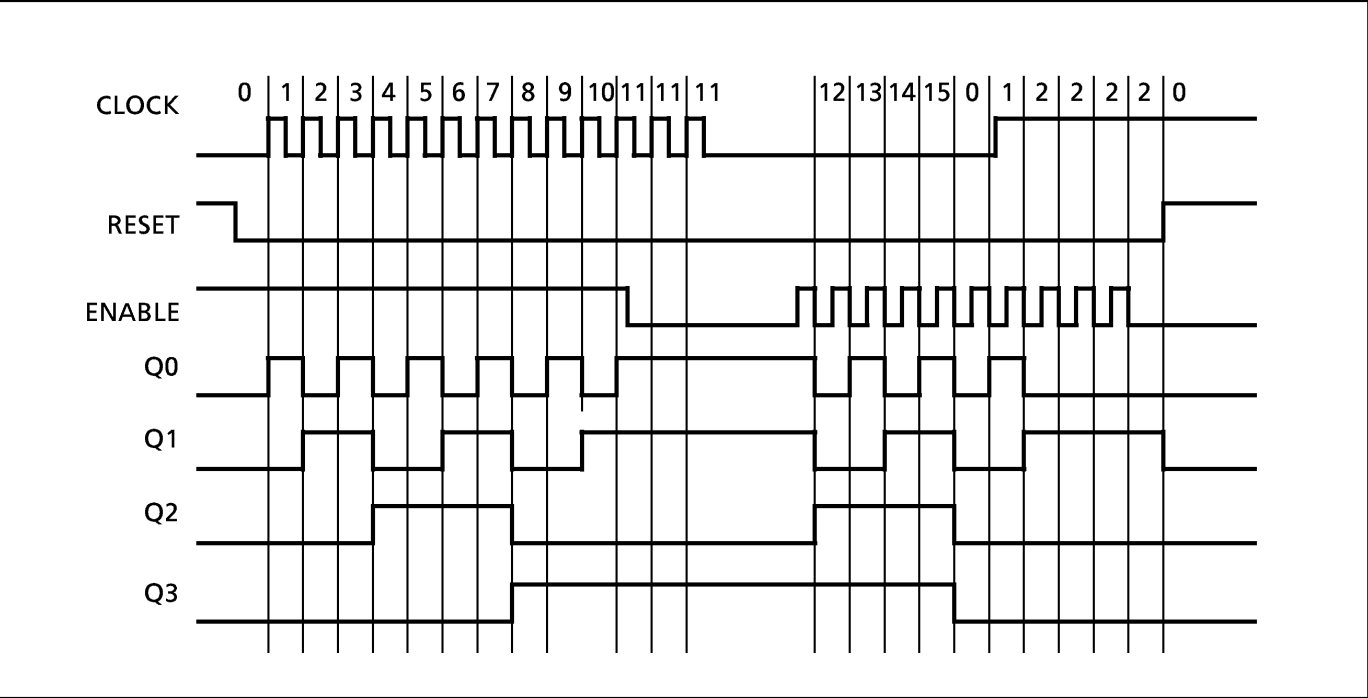

RECOMMENDED OPERATING CONDITIONS ($V_{SS} = 0V$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
DC Supply Voltage	V_{DD}		3	—	18	V
Input Voltage	V_{IN}		0	—	V_{DD}	V

STATIC ELECTRICAL CHARACTERISTICS ($V_{SS} = 0V$)


CHARACTERISTIC		SYM-BOL	TEST CONDITION	V _{DD} (V)	- 40°C		25°C			85°C		UNIT
					MIN.	MAX.	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Output Voltage		V _{OH}	I _{OUT} < 1 μA V _{IN} = V _{SS} , V _{DD}	5 10 15	4.95 9.95 14.95	— — —	4.95 9.95 14.95	5.00 10.00 15.00	— — —	4.95 9.95 14.95	— — —	V
Low-Level Output Voltage		V _{OL}	I _{OUT} < 1 μA V _{IN} = V _{SS} , V _{DD}	5 10 15	— — —	0.05 0.05 0.05	— — —	0.00 0.00 0.00	0.05 0.05 0.05	— — —	0.05 0.05 0.05	
Output High Current		I _{OH}	V _{OH} = 4.6V	5	- 0.61	—	- 0.51	- 1.0	—	- 0.42	—	mA
			V _{OH} = 2.5V	5	- 2.5	—	- 2.1	- 4.0	—	- 1.7	—	
			V _{OH} = 9.5V	10	- 1.5	—	- 1.3	- 2.2	—	- 1.1	—	
			V _{OH} = 13.5V	15	- 4.0	—	- 3.4	- 9.0	—	- 2.8	—	
			V _{IN} = V _{SS} , V _{DD}									
Output Low Current		I _{OL}	V _{OL} = 0.4V	5	0.61	—	0.51	1.2	—	0.42	—	
			V _{OL} = 0.5V	10	1.5	—	1.3	3.2	—	1.1	—	
			V _{OL} = 1.5V	15	4.0	—	3.4	12.0	—	2.8	—	
			V _{IN} = V _{SS} , V _{DD}									
Input High Voltage		V _{IH}	V _{OUT} = 0.5V, 4.5V	5	3.5	—	3.5	2.75	—	3.5	—	V
			V _{OUT} = 1.0V, 9.0V	10	7.0	—	7.0	5.5	—	7.0	—	
			V _{OUT} = 1.5V, 13.5V	15	11.0	—	11.0	8.25	—	11.0	—	
			I _{OUT} < 1 μA									
Input Low Voltage		V _{IL}	V _{OUT} = 0.5V, 4.5V	5	—	1.5	—	2.25	1.5	—	1.5	
			V _{OUT} = 1.0V, 9.0V	10	—	3.0	—	4.5	3.0	—	3.0	
			V _{OUT} = 1.5V, 13.5V	15	—	4.0	—	6.75	4.0	—	4.0	
			I _{OUT} < 1 μA									
Input Current	"H" Level	I _{IH}	V _{IH} = 18V	18	—	0.1	—	10 ⁻⁵	0.1	—	1.0	μA
	"L" Level	I _{IL}	V _{IL} = 0V	18	—	- 0.1	—	- 10 ⁻⁵	- 0.1	—	- 1.0	
Quiescent Supply Current		I _{DD}	V _{IN} = V _{SS} , V _{DD} *	5 10 15	— — —	5 10 20	— — —	0.005 0.010 0.015	5 10 20	— — —	150 300 600	

* All valid input combinations.

DYNAMIC ELECTRICAL CHARACTERISTICS (Ta = 25°C, V_{SS} = 0V, C_L = 50pF)


CHARACTERISTIC	SYMBOL	TEST CONDITION	V _{DD} (V)	MIN.	TYP.	MAX.	UNIT
Output Transition Time (Low to High)	t _{TLH}		5	—	70	200	ns
			10	—	35	100	
			15	—	30	80	
Output Transition Time (High to Low)	t _{THL}		5	—	70	200	ns
			10	—	35	100	
			15	—	30	80	
Propagation Delay Time (CLOCK, ENABLE - Q)	t _{pLH} t _{pHL}		5	—	160	560	ns
			10	—	75	230	
			15	—	60	160	
Propagation Delay Time (RESET - Q)	t _{pHL}		5	—	110	560	ns
			10	—	55	230	
			15	—	40	160	
Max. Clock Frequency	t _{CL}		5	1.5	6	—	MHz
			10	3	14	—	
			15	4	18	—	
Max. Clock Input Rise / Fall Time	t _{rCL} t _{fCL}		5	No Limit			μs
			10				
			15				
Max. Input Rise / Fall Time (ENABLE)	t _r t _f		5	No Limit			μs
			10				
			15				
Min. Clock Pulse Width	t _w		5	—	30	200	ns
			10	—	15	100	
			15	—	10	70	
Min. Pulse Width (ENABLE)	t _w		5	—	35	250	
			10	—	20	110	
			15	—	15	80	
Min. Pulse Width (RESET)	t _{WH}		5	—	45	250	
			10	—	20	110	
			15	—	15	80	
Min. Removal Time (RESET - CLOCK, ENABLE)	t _{rem}		5	—	—	0	
			10	—	—	0	
			15	—	—	0	
Input Capacitance	C _{IN}			—	5	7.5	pF

WAVEFORMS FOR MEASUREMENT OF DYNAMIC CHARACTERISTICS

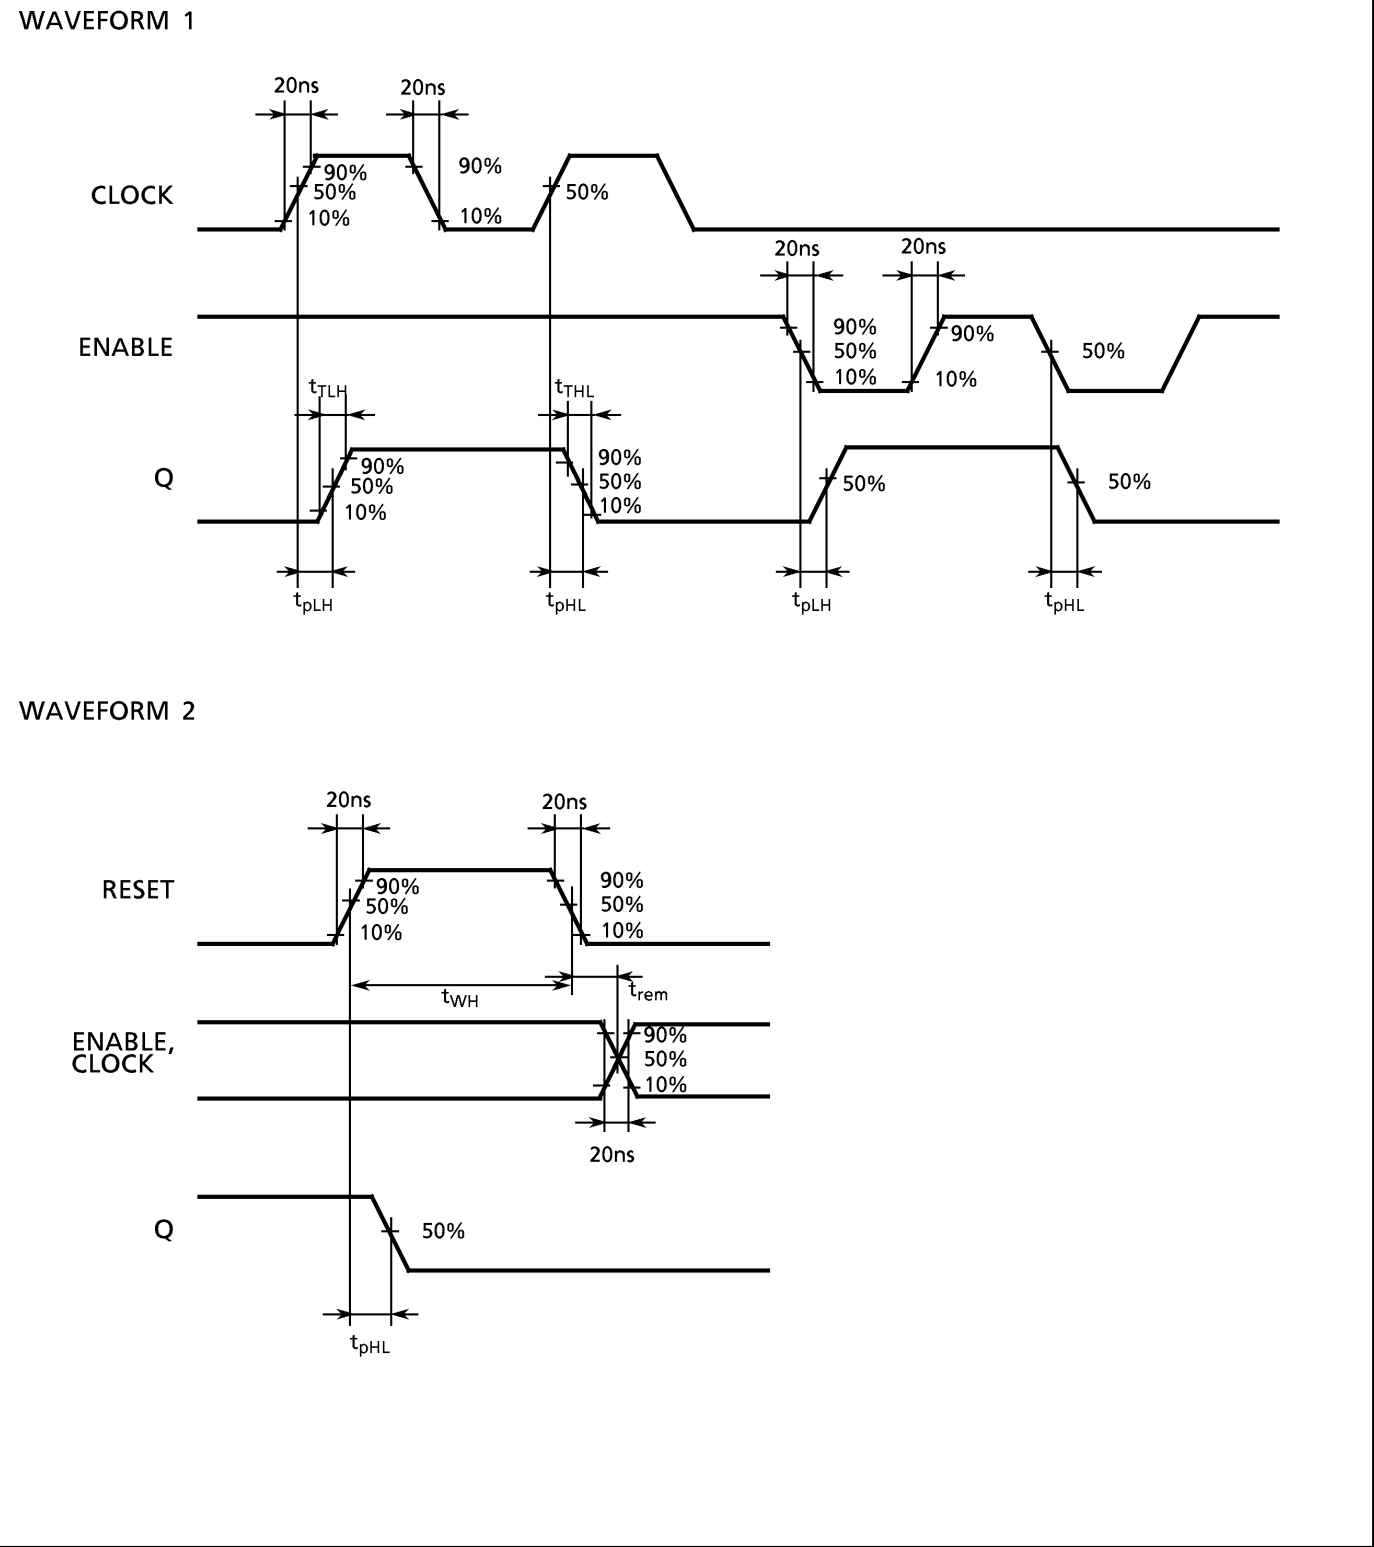


APPLICATION CIRCUIT

(1) RIPPLE CARRY COUNTER

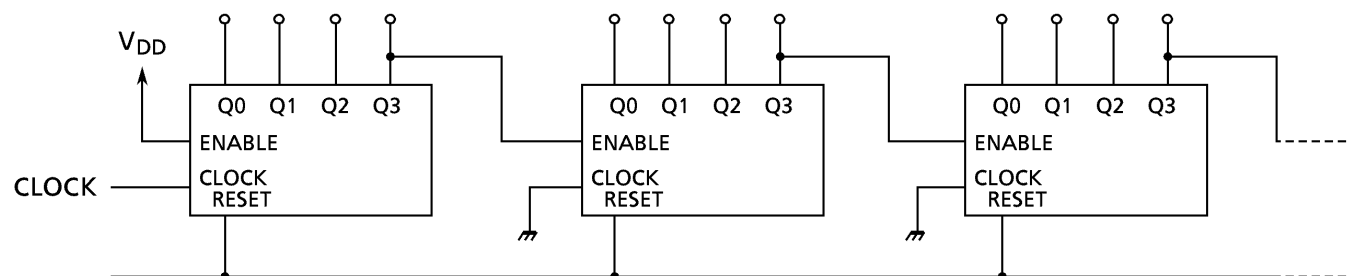


(2) RIPPLE CARRY COUNTER

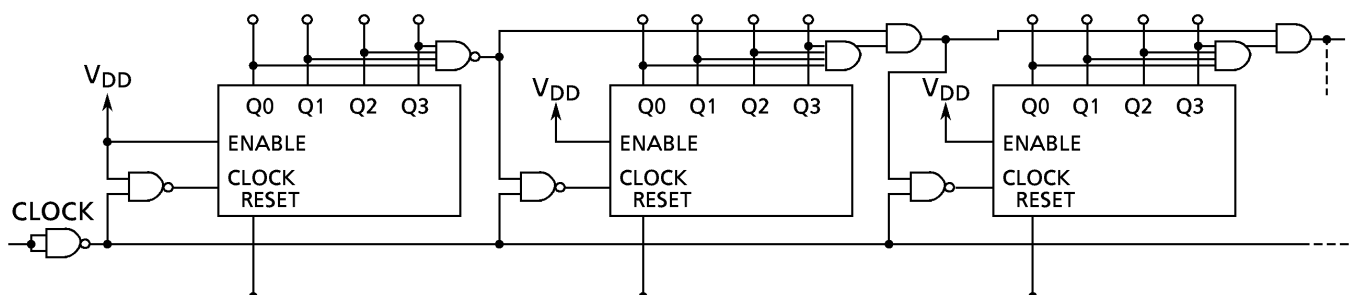

DIP 16PIN PACKAGE DIMENSIONS (DIP16-P-300-2.54A)


Unit in mm

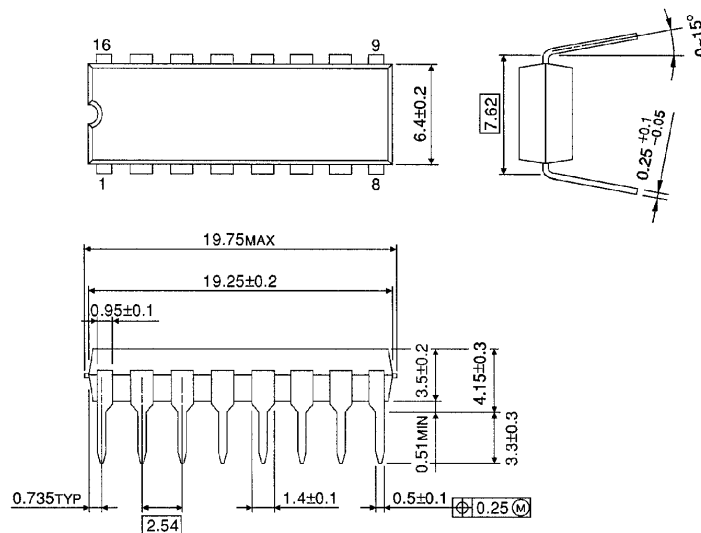

Weight : 1.00g (Typ.)

SOP 16PIN (200mil BODY) PACKAGE DIMENSIONS (SOP16-P-300-1.27)

Unit in mm

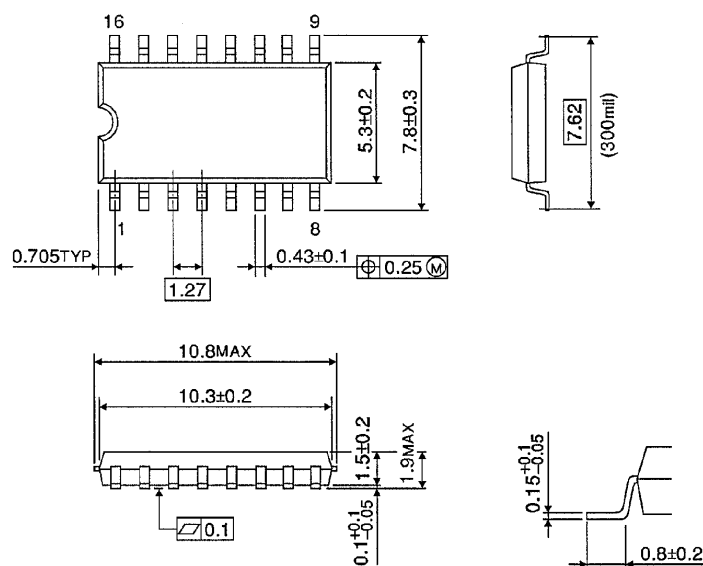


Weight : 0.18g (Typ.)

SOP 16PIN (150mil BODY) PACKAGE DIMENSIONS (SOL16-P-150 -1.27)

Unit in mm

(Note) This package is not available in Japan.

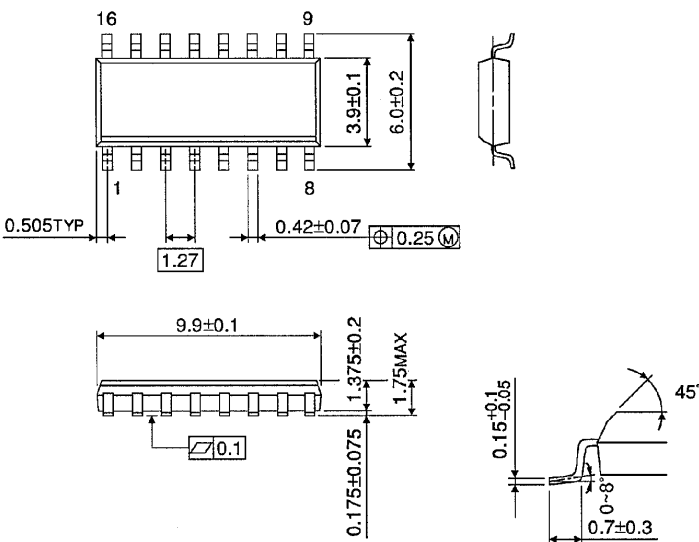

Weight : 0.13g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.