

TENTATIVE TOSHIBA MOS DIGITAL INTEGRATED CIRCUIT SILICON GATE CMOS

262,144-WORD BY 16-BIT FULL CMOS STATIC RAM

## DESCRIPTION

The TC55VEM216ABXN is a 4,194,304-bit static random access memory (SRAM) organized as 262,144 words by 16 bits. Fabricated using Toshiba's CMOS Silicon gate process technology, this device operates from a single 2.3 to 3.6 V power supply. Advanced circuit technology provides both high speed and low power at an operating current of 3 mA/MHz and a minimum cycle time of 40 ns. It is automatically placed in low-power mode at 0.7  $\mu$ A standby current (at  $V_{DD} = 3$  V,  $T_a = 25^\circ\text{C}$ , typical) when chip enable ( $\overline{CE1}$ ) is asserted high or ( $\overline{CE2}$ ) is asserted low. There are three control inputs.  $\overline{CE1}$  and  $\overline{CE2}$  are used to select the device and for data retention control, and output enable ( $\overline{OE}$ ) provides fast memory access. Data byte control pin ( $\overline{LB}$ ,  $\overline{UB}$ ) provides lower and upper byte access. This device is well suited to various microprocessor system applications where high speed, low power and battery backup are required. And, with a guaranteed operating extreme temperature range of  $-40^\circ$  to  $85^\circ\text{C}$ , the TC55VEM216ABXN can be used in environments exhibiting extreme temperature conditions. The TC55VEM216ABXN is available in a plastic 48-ball BGA.

## FEATURES

- Low-power dissipation  
Operating: 9 mW/MHz (typical)
- Single power supply voltage of 2.3 to 3.6 V
- Power down features using  $\overline{CE1}$  and  $\overline{CE2}$
- Data retention supply voltage of 1.5 to 3.6 V
- Direct TTL compatibility for all inputs and outputs
- Wide operating temperature range of  $-40^\circ$  to  $85^\circ\text{C}$
- Standby Current (maximum):

|       |            |
|-------|------------|
| 3.6 V | 10 $\mu$ A |
| 3.0 V | 5 $\mu$ A  |

- Access Times:

|                              | TC55VEM216ABXN |       |
|------------------------------|----------------|-------|
|                              | 40             | 55    |
| Access Time                  | 40 ns          | 55 ns |
| $\overline{CE1}$ Access Time | 40 ns          | 55 ns |
| $\overline{CE2}$ Access Time | 40 ns          | 55 ns |
| $\overline{OE}$ Access Time  | 25 ns          | 30 ns |

- Package:  
P-TFBGA48-0608-0.75BZ (Weight:0.10 g typ)

## PIN ASSIGNMENT (TOP VIEW)

48 PIN BGA


|   | 1               | 2               | 3   | 4   | 5                | 6        |
|---|-----------------|-----------------|-----|-----|------------------|----------|
| A | $\overline{LB}$ | $\overline{OE}$ | A0  | A1  | A2               | CE2      |
| B | I/O9            | $\overline{UB}$ | A3  | A4  | $\overline{CE1}$ | I/O1     |
| C | I/O10           | I/O11           | A5  | A6  | I/O2             | I/O3     |
| D | $V_{SS}$        | I/O12           | A17 | A7  | I/O4             | $V_{DD}$ |
| E | $V_{DD}$        | I/O13           | OP  | A16 | I/O5             | $V_{SS}$ |
| F | I/O15           | I/O14           | A14 | A15 | I/O6             | I/O7     |
| G | I/O16           | NC              | A12 | A13 | R/W              | I/O8     |
| H | NC              | A8              | A9  | A10 | A11              | NC       |

## PIN NAMES

|                                     |                     |
|-------------------------------------|---------------------|
| A0~A17                              | Address Inputs      |
| $\overline{CE1}$ , $\overline{CE2}$ | Chip Enable         |
| R/W                                 | Read/Write Control  |
| $\overline{OE}$                     | Output Enable       |
| $\overline{LB}$ , $\overline{UB}$   | Data Byte Control   |
| I/O1~I/O16                          | Data Inputs/Outputs |
| $V_{DD}$                            | Power               |
| GND                                 | Ground              |
| NC                                  | No Connection       |
| OP*                                 | Option              |

\*: OP pin must be open or connected to GND.

**BLOCK DIAGRAM**

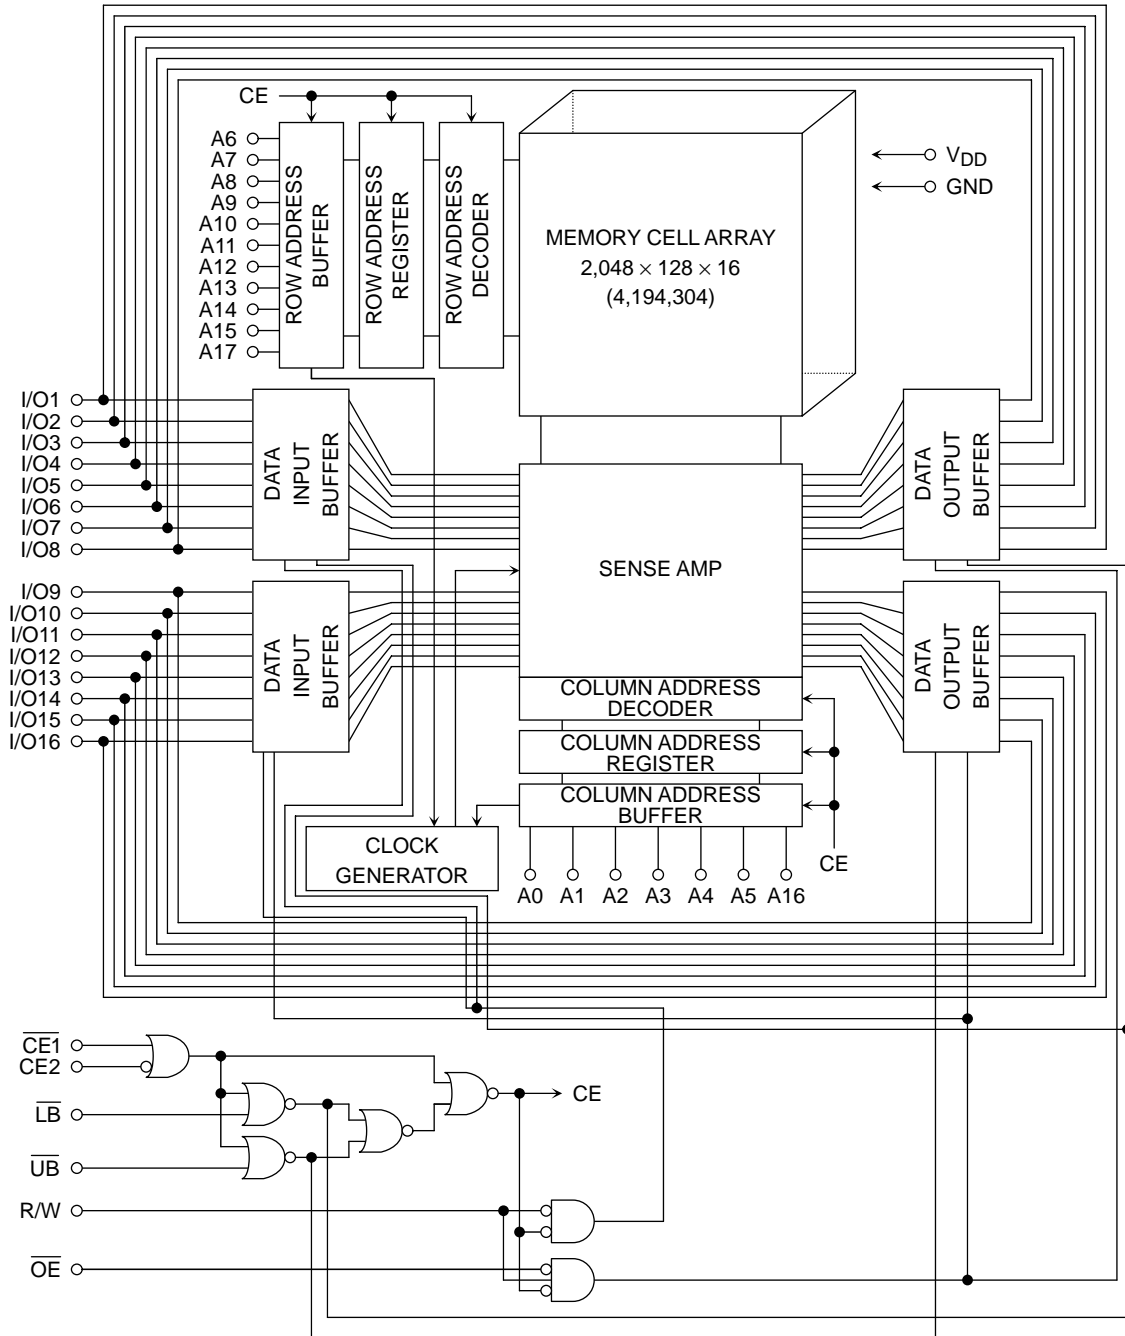

## OPERATING MODE

| MODE            | $\overline{CE1}$ | CE2 | $\overline{OE}$ | R/W | $\overline{LB}$ | $\overline{UB}$ | I/O1~I/O8 | I/O9~I/O16 | POWER            |
|-----------------|------------------|-----|-----------------|-----|-----------------|-----------------|-----------|------------|------------------|
| Read            | L                | H   | L               | H   | L               | L               | Output    | Output     | I <sub>DDO</sub> |
|                 | L                | H   | L               | H   | H               | L               | High-Z    | Output     | I <sub>DDO</sub> |
|                 | L                | H   | L               | H   | L               | H               | Output    | High-Z     | I <sub>DDO</sub> |
| Write           | L                | H   | *               | L   | L               | L               | Input     | Input      | I <sub>DDO</sub> |
|                 | L                | H   | *               | L   | H               | L               | High-Z    | Input      | I <sub>DDO</sub> |
|                 | L                | H   | *               | L   | L               | H               | Input     | High-Z     | I <sub>DDO</sub> |
| Output Deselect | L                | H   | H               | H   | L               | L               | High-Z    | High-Z     | I <sub>DDO</sub> |
|                 | L                | H   | H               | H   | H               | L               | High-Z    | High-Z     | I <sub>DDO</sub> |
|                 | L                | H   | H               | H   | L               | H               | High-Z    | High-Z     | I <sub>DDO</sub> |
| Standby         | H                | *   | *               | *   | *               | *               | High-Z    | High-Z     | I <sub>DDS</sub> |
|                 | *                | L   | *               | *   | *               | *               | High-Z    | High-Z     | I <sub>DDS</sub> |
|                 | *                | *   | *               | *   | H               | H               | High-Z    | High-Z     | I <sub>DDS</sub> |

\* = don't care  
H = logic high  
L = logic low

## MAXIMUM RATINGS

| SYMBOL              | RATING                      | VALUE                      | UNIT |
|---------------------|-----------------------------|----------------------------|------|
| V <sub>DD</sub>     | Power Supply Voltage        | -0.3~4.2                   | V    |
| V <sub>IN</sub>     | Input Voltage               | -0.3*~4.2                  | V    |
| V <sub>I/O</sub>    | Input/Output Voltage        | -0.5~V <sub>DD</sub> + 0.5 | V    |
| P <sub>D</sub>      | Power Dissipation           | 0.6                        | W    |
| T <sub>solder</sub> | Soldering Temperature (10s) | 260                        | °C   |
| T <sub>stg</sub>    | Storage Temperature         | -55~125                    | °C   |
| T <sub>opr</sub>    | Operating Temperature       | -40~85                     | °C   |

\*: -2.0 V when measured at a pulse width of 20ns

## DC RECOMMENDED OPERATING CONDITIONS (Ta = -40° to 85°C)

| SYMBOL          | PARAMETER                     | MIN                           | TYP | MAX                    | UNIT                  |   |
|-----------------|-------------------------------|-------------------------------|-----|------------------------|-----------------------|---|
| V <sub>DD</sub> | Power Supply Voltage          | 2.3                           | —   | 3.6                    | V                     |   |
| V <sub>IH</sub> | Input High Voltage            | V <sub>DD</sub> = 2.3 V~2.7 V | 2.0 | —                      | V <sub>DD</sub> + 0.3 | V |
|                 |                               | V <sub>DD</sub> = 2.7 V~3.6 V | 2.2 |                        |                       |   |
| V <sub>IL</sub> | Input Low Voltage             | -0.3*                         | —   | V <sub>DD</sub> × 0.24 | V                     |   |
| V <sub>DH</sub> | Data Retention Supply Voltage | 1.5                           | —   | 3.6                    | V                     |   |

\*: -2.0 V when measured at a pulse width of 20ns

## DC CHARACTERISTICS (Ta = -40° to 85°C, VDD = 2.3 to 3.6 V)

| SYMBOL            | PARAMETER              | TEST CONDITION  |                              | MIN  | TYP | MAX  | UNIT |    |
|-------------------|------------------------|---|------------------------------|--|-----|------|------|----|
| I <sub>IL</sub>   | Input Leakage Current  | V <sub>IN</sub> = 0 V~V <sub>DD</sub>   |                              | —  | —   | ±1.0 | μA   |    |
| I <sub>OH</sub>   | Output High Current    | V <sub>OH</sub> = V <sub>DD</sub> - 0.5 V   |                              | -0.5   | —   | —    | mA   |    |
| I <sub>OL</sub>   | Output Low Current     | V <sub>OL</sub> = 0.4 V   |                              | 2.1  | —   | —    | mA   |    |
| I <sub>LO</sub>   | Output Leakage Current | $\overline{CE1} = V_{IH}$ or $CE2 = V_{IL}$ or $\overline{LB} = \overline{UB} = V_{IH}$ or $R/W = V_{IL}$ or $OE = V_{IH}$ , V <sub>OUT</sub> = 0 V~V <sub>DD</sub>                       |                              | —  | —   | ±1.0 | μA   |    |
| I <sub>DDO1</sub> | Operating Current      | $\overline{CE1} = V_{IL}$ and $CE2 = V_{IH}$ and $R/W = V_{IH}$ , $\overline{LB} = \overline{UB} = V_{IL}$ ,<br>I <sub>OUT</sub> = 0 mA<br>Other Input = V <sub>IH</sub> /V <sub>IL</sub> | t <sub>cycle</sub>           | min  | —   | —    | 35   | mA |
| I <sub>DDO2</sub> |                        |   |                              | 1 μs   | —   | —    | 8    |    |
|                   |                        | I <sub>DDO2</sub>   |                              | $\overline{CE1} = 0.2 V$ and $CE2 = V_{DD} - 0.2 V$ and $R/W = V_{DD} - 0.2 V$ , $\overline{LB} = \overline{UB} = 0.2 V$ ,<br>I <sub>OUT</sub> = 0 mA<br>Other Input = V <sub>DD</sub> - 0.2 V/0.2 V | min | —    | —    | 30 |
| 1 μs              |                        |   |                              |  | —   | —    | 3    |    |
| I <sub>DDS1</sub> | Standby Current        | 1) $\overline{CE1} = V_{IH}$ or $CE2 = V_{IL}$<br>2) $\overline{LB} = \overline{UB} = V_{IH}$   |                              | —  | —   | 1    | mA   |    |
| I <sub>DDS2</sub> |                        | 1) $\overline{CE1} = V_{DD} - 0.2 V$ , $CE2 = 0.2 V$<br>2) $CE2 = 0.2 V$<br>3) $\overline{LB} = \overline{UB} = V_{DD} - 0.2 V$ ,<br>$\overline{CE1} = 0.2 V$ , $CE2 = V_{DD} - 0.2 V$    | V <sub>DD</sub> = 3.3V±0.3 V | Ta = -40~85°C  | —   | —    | 10   | μA |
|                   |                        |   | V <sub>DD</sub> = 3.0 V      | Ta = 25°C  | —   | 0.7  | —    |    |
|                   |                        |   |                              | Ta = -40~40°C  | —   | —    | 2    |    |
|                   | Ta = -40~85°C          |   |                              | —  | —   | 5    |      |    |

## CAPACITANCE (Ta = 25°C, f = 1 MHz)

| SYMBOL           | PARAMETER          | TEST CONDITION         | MAX | UNIT |
|------------------|--------------------|------------------------|-----|------|
| C <sub>IN</sub>  | Input Capacitance  | V <sub>IN</sub> = GND  | 10  | pF   |
| C <sub>OUT</sub> | Output Capacitance | V <sub>OUT</sub> = GND | 10  | pF   |

Note: This parameter is periodically sampled and is not 100% tested.

## AC CHARACTERISTICS AND OPERATING CONDITIONS

( $T_a = -40^\circ$  to  $85^\circ\text{C}$ ,  $V_{DD} = 2.7$  to  $3.6\text{ V}$ )

### READ CYCLE

| SYMBOL    | PARAMETER                                   | TC55VEM216ABXN |     |     |     | UNIT |
|-----------|---|----------------|-----|-----|-----|------|
|           |   | 40             |     | 55  |     |      |
|           |   | MIN            | MAX | MIN | MAX |      |
| $t_{RC}$  | Read Cycle Time                             | 40             | —   | 55  | —   | ns   |
| $t_{ACC}$ | Address Access Time                         | —              | 40  | —   | 55  |      |
| $t_{CO1}$ | Chip Enable( $\overline{CE1}$ ) Access Time | —              | 40  | —   | 55  |      |
| $t_{CO2}$ | Chip Enable(CE2) Access Time                | —              | 40  | —   | 55  |      |
| $t_{OE}$  | Output Enable Access Time                   | —              | 25  | —   | 30  |      |
| $t_{BA}$  | Data Byte Control Access Time               | —              | 40  | —   | 55  |      |
| $t_{COE}$ | Chip Enable Low to Output Active            | 5              | —   | 5   | —   |      |
| $t_{OEE}$ | Output Enable Low to Output Active          | 0              | —   | 0   | —   |      |
| $t_{BE}$  | Data Byte Control Low to Output Active      | 5              | —   | 5   | —   |      |
| $t_{OD}$  | Chip Enable High to Output High-Z           | —              | 20  | —   | 25  |      |
| $t_{ODO}$ | Output Enable High to Output High-Z         | —              | 20  | —   | 25  |      |
| $t_{BD}$  | Data Byte Control High to Output High-Z     | —              | 20  | —   | 25  |      |
| $t_{OH}$  | Output Data Hold Time                       | 10             | —   | 10  | —   |      |

### WRITE CYCLE

| SYMBOL    | PARAMETER                         | TC55VEM216ABXN |     |     |     | UNIT |
|-----------|-----------------------------------|----------------|-----|-----|-----|------|
|           |                                   | 40             |     | 55  |     |      |
|           |                                   | MIN            | MAX | MIN | MAX |      |
| $t_{WC}$  | Write Cycle Time                  | 40             | —   | 55  | —   | ns   |
| $t_{WP}$  | Write Pulse Width                 | 30             | —   | 40  | —   |      |
| $t_{CW}$  | Chip Enable to End of Write       | 35             | —   | 45  | —   |      |
| $t_{BW}$  | Data Byte Control to End of Write | 35             | —   | 45  | —   |      |
| $t_{AS}$  | Address Setup Time                | 0              | —   | 0   | —   |      |
| $t_{WR}$  | Write Recovery Time               | 0              | —   | 0   | —   |      |
| $t_{ODW}$ | R/W Low to Output High-Z          | —              | 20  | —   | 25  |      |
| $t_{OEW}$ | R/W High to Output Active         | 0              | —   | 0   | —   |      |
| $t_{DS}$  | Data Setup Time                   | 20             | —   | 25  | —   |      |
| $t_{DH}$  | Data Hold Time                    | 0              | —   | 0   | —   |      |

Note:  $t_{OD}$ ,  $t_{ODO}$ ,  $t_{BD}$  and  $t_{ODW}$  are specified in time when an output becomes high impedance, and are not judged depending on an output voltage level.

## AC CHARACTERISTICS AND OPERATING CONDITIONS

( $T_a = -40^\circ$  to  $85^\circ\text{C}$ ,  $V_{DD} = 2.3$  to  $3.6\text{ V}$ )

### READ CYCLE

| SYMBOL    | PARAMETER                                   | TC55VEM216ABXN |     |     |     | UNIT |
|-----------|---|----------------|-----|-----|-----|------|
|           |   | 40             |     | 55  |     |      |
|           |   | MIN            | MAX | MIN | MAX |      |
| $t_{RC}$  | Read Cycle Time                             | 55             | —   | 70  | —   | ns   |
| $t_{ACC}$ | Address Access Time                         | —              | 55  | —   | 70  |      |
| $t_{CO1}$ | Chip Enable( $\overline{CE1}$ ) Access Time | —              | 55  | —   | 70  |      |
| $t_{CO2}$ | Chip Enable(CE2) Access Time                | —              | 55  | —   | 70  |      |
| $t_{OE}$  | Output Enable Access Time                   | —              | 30  | —   | 35  |      |
| $t_{BA}$  | Data Byte Control Access Time               | —              | 55  | —   | 70  |      |
| $t_{COE}$ | Chip Enable Low to Output Active            | 5              | —   | 5   | —   |      |
| $t_{OEE}$ | Output Enable Low to Output Active          | 0              | —   | 0   | —   |      |
| $t_{BE}$  | Data Byte Control Low to Output Active      | 5              | —   | 5   | —   |      |
| $t_{OD}$  | Chip Enable High to Output High-Z           | —              | 25  | —   | 30  |      |
| $t_{ODO}$ | Output Enable High to Output High-Z         | —              | 25  | —   | 30  |      |
| $t_{BD}$  | Data Byte Control High to Output High-Z     | —              | 25  | —   | 30  |      |
| $t_{OH}$  | Output Data Hold Time                       | 10             | —   | 10  | —   |      |

### WRITE CYCLE


| SYMBOL    | PARAMETER                         | TC55VEM216ABXN |     |     |     | UNIT |
|-----------|-----------------------------------|----------------|-----|-----|-----|------|
|           |                                   | 40             |     | 55  |     |      |
|           |                                   | MIN            | MAX | MIN | MAX |      |
| $t_{WC}$  | Write Cycle Time                  | 55             | —   | 70  | —   | ns   |
| $t_{WP}$  | Write Pulse Width                 | 40             | —   | 50  | —   |      |
| $t_{CW}$  | Chip Enable to End of Write       | 45             | —   | 55  | —   |      |
| $t_{BW}$  | Data Byte Control to End of Write | 45             | —   | 55  | —   |      |
| $t_{AS}$  | Address Setup Time                | 0              | —   | 0   | —   |      |
| $t_{WR}$  | Write Recovery Time               | 0              | —   | 0   | —   |      |
| $t_{ODW}$ | R/W Low to Output High-Z          | —              | 25  | —   | 30  |      |
| $t_{OEW}$ | R/W High to Output Active         | 0              | —   | 0   | —   |      |
| $t_{DS}$  | Data Setup Time                   | 25             | —   | 30  | —   |      |
| $t_{DH}$  | Data Hold Time                    | 0              | —   | 0   | —   |      |

Note:  $t_{OD}$ ,  $t_{ODO}$ ,  $t_{BD}$  and  $t_{ODW}$  are specified in time when an output becomes high impedance, and are not judged depending on an output voltage level.


## AC TEST CONDITIONS

| PARAMETER           | TEST CONDITION                       |
|---------------------|--------------------------------------|
| Input pulse level   | 0.2 V, $V_{DD} \times 0.7 V + 0.2 V$ |
| $t_R, t_F$          | 1 V / ns (Fig.1)                     |
| Timing measurements | $V_{DD} \times 0.5$                  |
| Reference level     | $V_{DD} \times 0.5$                  |
| Output load         | 30 pF + 1 TTL Gate (Fig.2)           |

**Fig.1** : Input rise and fall time

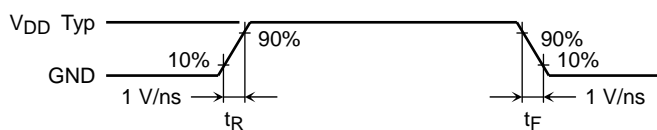


**Fig.2** : Output load

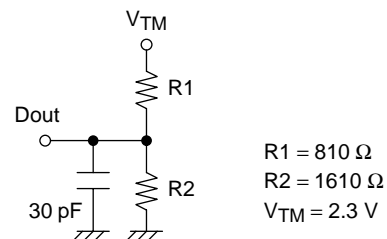


## TIMING DIAGRAMS


### READ CYCLE (See Note 1)

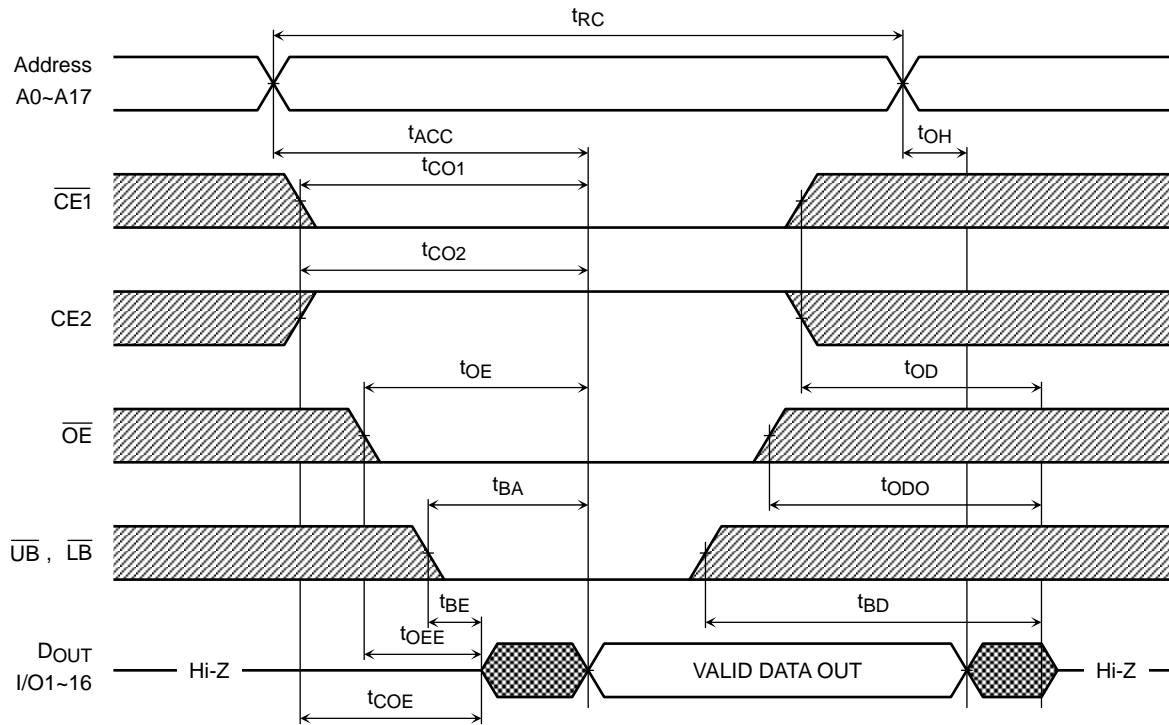


### WRITE CYCLE 1 (R/W CONTROLLED) (See Note 4)

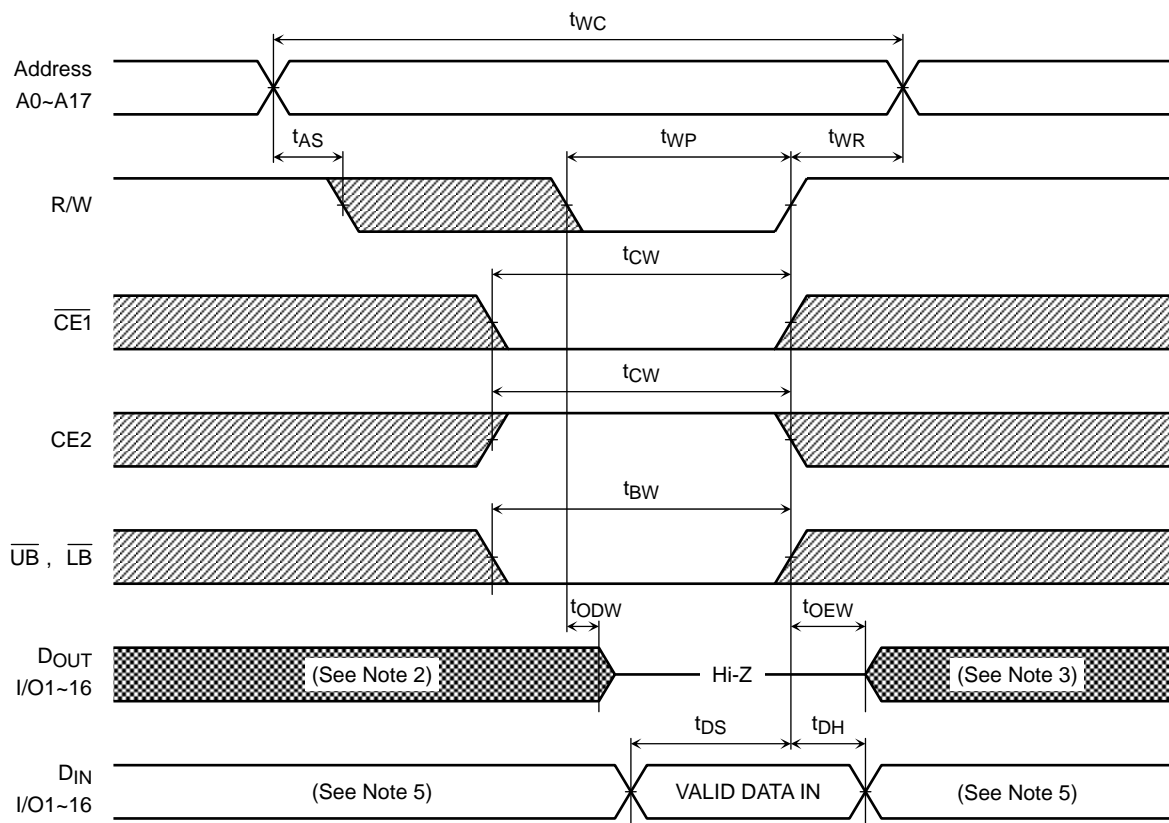


WRITE CYCLE 2 ( $\overline{CE1}$  CONTROLLED) (See Note 4)

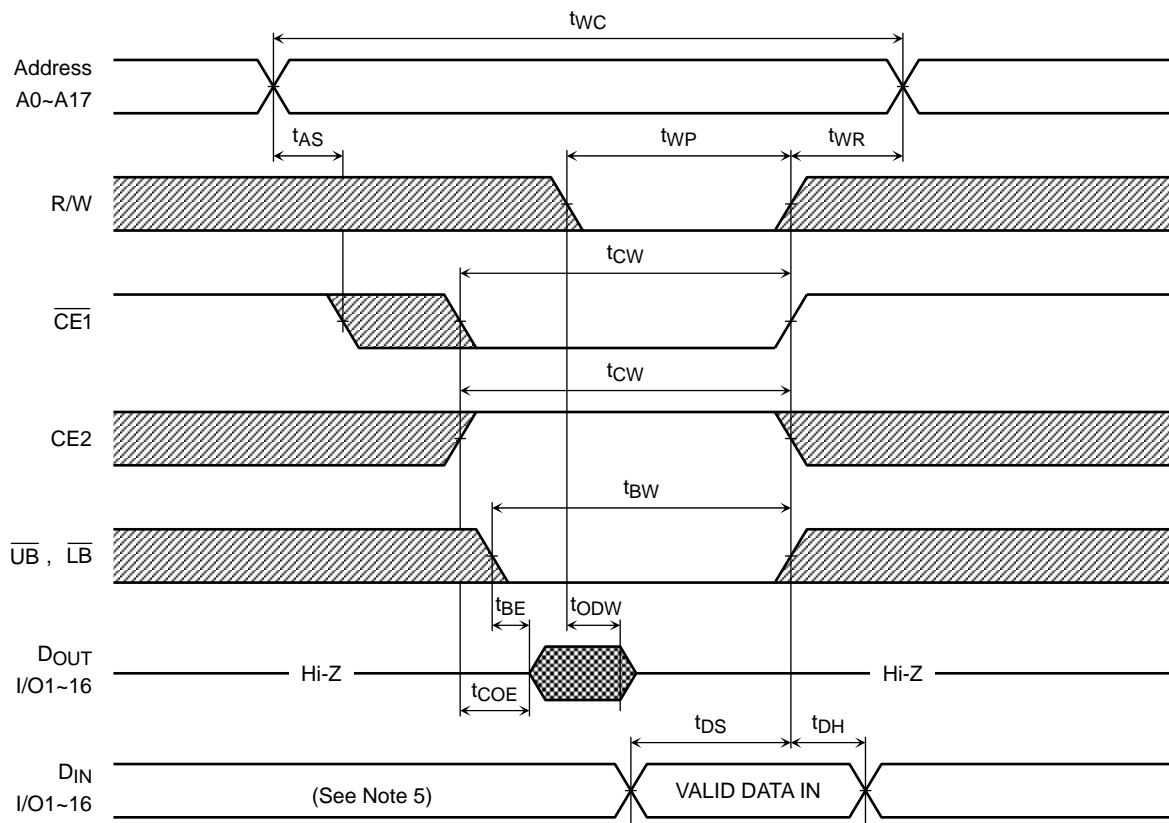

WRITE CYCLE 3 ( $CE2$  CONTROLLED) (See Note 4)

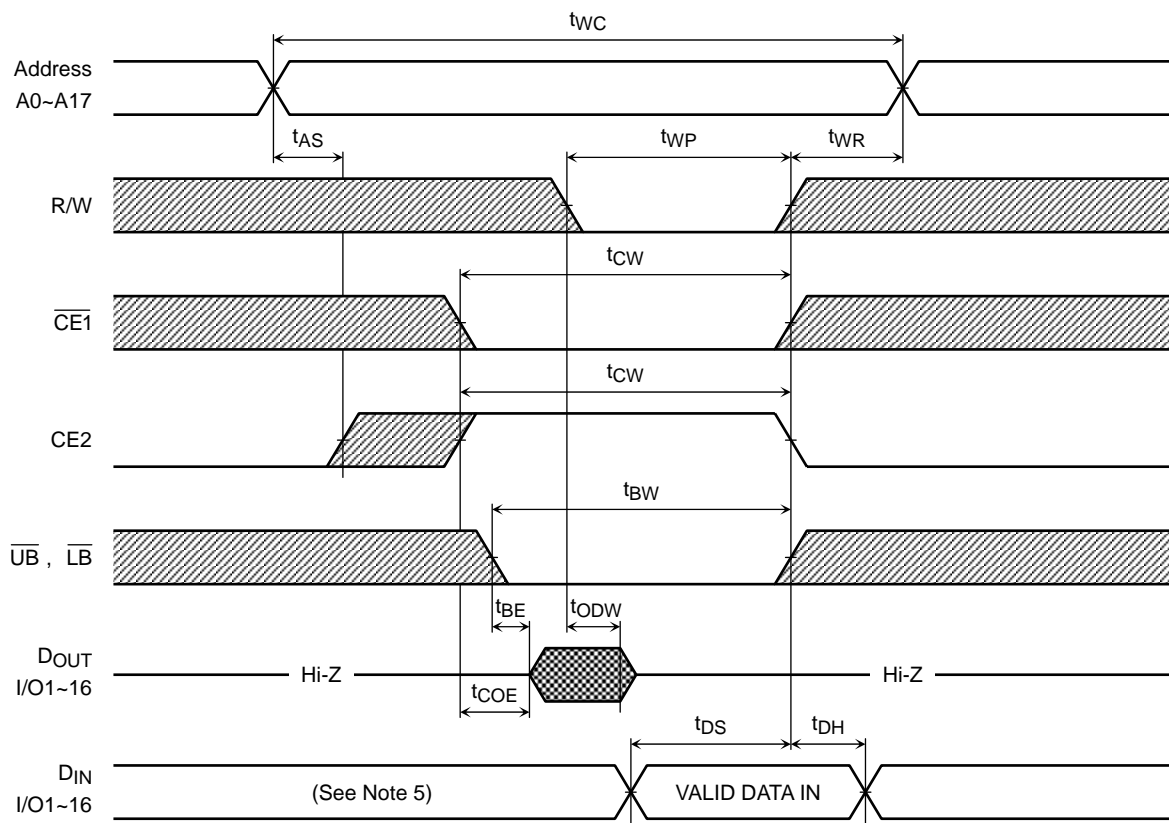

## WRITE CYCLE 4 ( $\overline{UB}$ , $\overline{LB}$ CONTROLLED) (See Note 4)

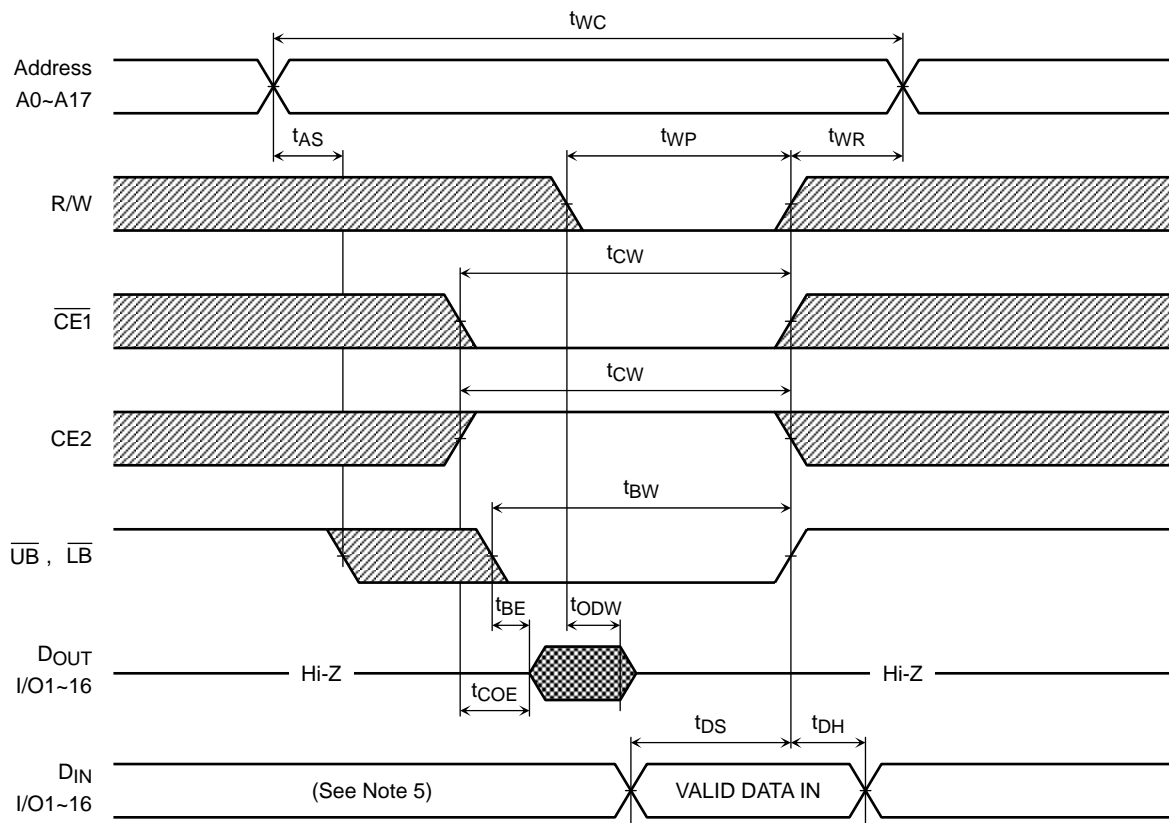


### Note:

- (1) R/W remains HIGH for the read cycle.
- (2) If  $\overline{CE1}$  (or  $\overline{UB}$  or  $\overline{LB}$ ) goes LOW (or CE2 goes HIGH) coincident with or after R/W goes LOW, the outputs will remain at high impedance.
- (3) If  $\overline{CE1}$  (or  $\overline{UB}$  or  $\overline{LB}$ ) goes HIGH (or CE2 goes LOW) coincident with or before R/W goes HIGH, the outputs will remain at high impedance.
- (4) If  $\overline{OE}$  is HIGH during the write cycle, the outputs will remain at high impedance.
- (5) Because I/O signals may be in the output state at this time, input signals of reverse polarity must not be applied.


**DATA RETENTION CHARACTERISTICS (Ta = -40° to 85°C)**

| SYMBOL            | PARAMETER                                 |                         | MIN           | TYP | MAX | UNIT |    |
|-------------------|---|-------------------------|---------------|-----|-----|------|----|
| V <sub>DH</sub>   | Data Retention Supply Voltage             |                         | 1.5           | —   | 3.6 | V    |    |
| I <sub>DDS2</sub> | Standby Current                           | V <sub>DH</sub> = 3.6 V | Ta = -40~85°C | —   | —   | 10   | μA |
|                   |   | V <sub>DH</sub> = 3.0 V | Ta = -40~40°C | —   | —   | 2    |    |
|                   |   |                         | Ta = -40~85°C | —   | —   | 5    |    |
| t <sub>CDR</sub>  | Chip Deselect to Data Retention Mode Time |                         | 0             | —   | —   | ns   |    |
| t <sub>R</sub>    | Recovery Time                             |                         | 5             | —   | —   | ms   |    |


CE1 CONTROLLED DATA RETENTION MODE (See Note 1)

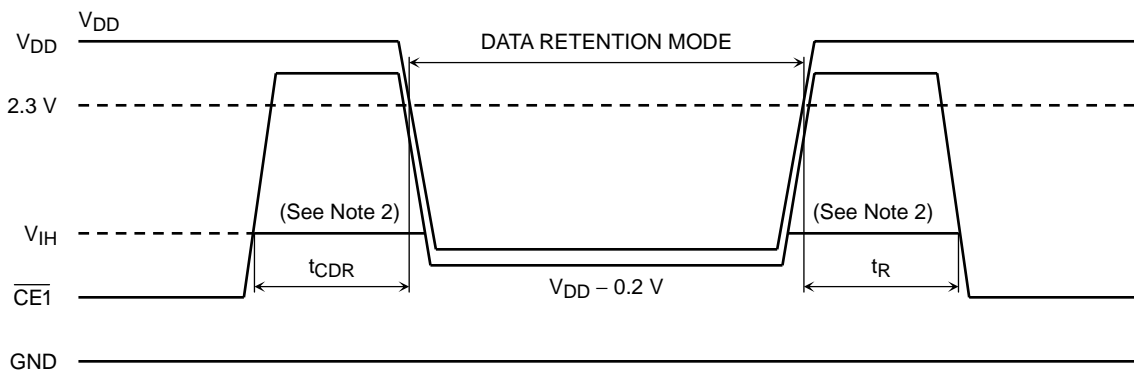

CE2 CONTROLLED DATA RETENTION MODE (See Note 3)

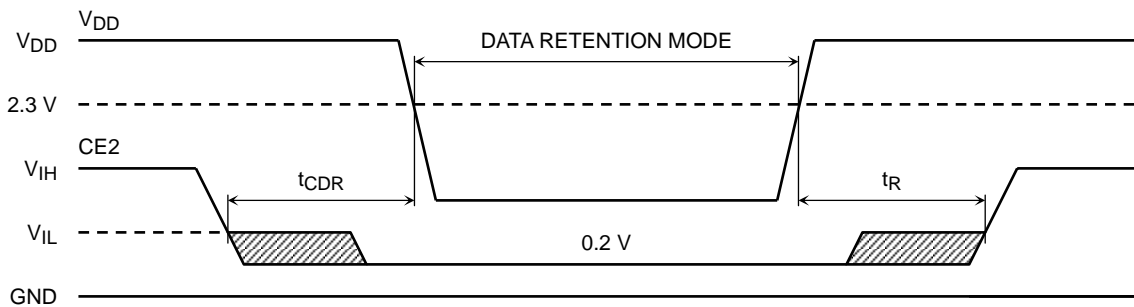

UB, LB CONTROLLED DATA RETENTION MODE (See Note 4)

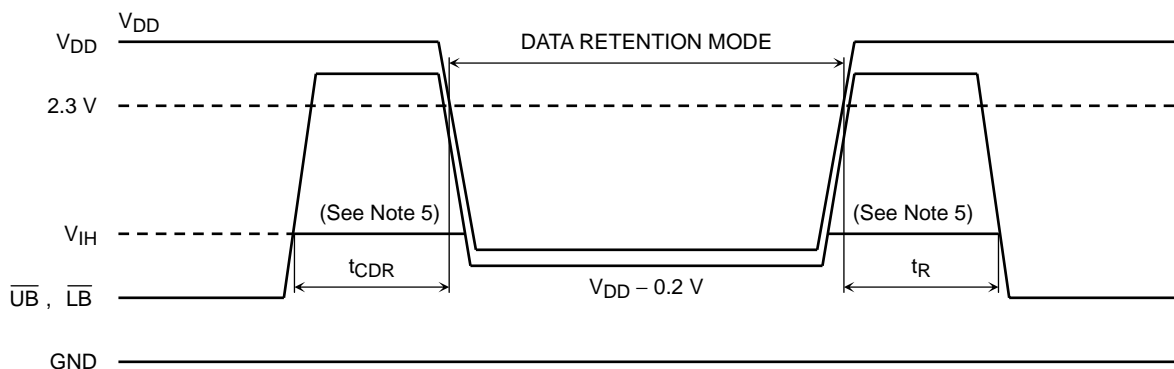

## Note:

- (1) In  $\overline{\text{CE1}}$  controlled data retention mode, minimum standby current mode is entered when  $\text{CE2} \leq 0.2 \text{ V}$  or  $\text{CE2} \geq \text{V}_{\text{DD}} - 0.2 \text{ V}$ .
- (2) When  $\overline{\text{CE1}}$  is operating at the  $\text{V}_{\text{IH}}(\text{min.})$  level, the operating current is given by  $\text{I}_{\text{DDS1}}$  during the transition of  $\text{V}_{\text{DD}}$  from 2.3(2.7) to 2.2V(2.4 V).
- (3) In  $\text{CE2}$  controlled data retention mode, minimum standby current mode is entered when  $\text{CE2} \leq 0.2 \text{ V}$ .
- (4) In  $\overline{\text{UB}}$  (or  $\overline{\text{LB}}$ ) controlled data retention mode, minimum standby current mode is entered when  $\overline{\text{CE1}} \leq 0.2 \text{ V}$  or  $\overline{\text{CE1}} \geq \text{V}_{\text{DD}} - 0.2 \text{ V}$ ,  $\text{CE2} \leq 0.2 \text{ V}$  or  $\text{CE2} \geq \text{V}_{\text{DD}} - 0.2 \text{ V}$ .
- (5) When  $\overline{\text{CE1}}$  is operating at the  $\text{V}_{\text{IH}}(\text{min.})$  level, the operating current is given by  $\text{I}_{\text{DDS1}}$  during the transition of  $\text{V}_{\text{DD}}$  from 2.3(2.7) to 2.2V(2.4 V).



**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.