

SINGLE CHANNEL IL250/251/252 DUAL CHANNEL ILD250/251/252 BIDIRECTIONAL INPUT OPTOCOUPLER

FEATURES

- Selected Current Transfer Ratios
20%, 50%, 100% Minimum
- AC or Polarity Insensitive Input
- Built-in Reverse Polarity Input Protection
- Improved CTR Symmetry
- Industry Standard DIP Package
- Underwriters Lab File #E52744
-  VDE 0884 Available with Option 1

Maximum Ratings (Per Channel)

Emitter

Continuous Forward Current60 mA
Power Dissipation at 25°C.....100 mW
Derate Linearly from 25°C.....1.33 mW/°C

Detector

Collector-Emitter Breakdown Voltage..... 30 V
Emitter-Base Breakdown Voltage5 V
Collector-Base Breakdown Voltage70 V
Power Dissipation at 25°C

Single Channel200 mW

Dual Channel150 mW

Derate Linearly from 25°C

Single Channel2.6 mW/°C

Dual Channel2.0 mW/°C

Package

Isolation Test Voltage (between
emitter and detector referred to
standard climate 23°C/50%RH,
DIN 50014)5300 VAC_{RMS}

Creepage7 mm min.

Clearance7 mm min.

Isolation Resistance

$V_{IO}=500V$, $T_A=25^{\circ}C$ $10^{12} \Omega$

$V_{IO}=500V$, $T_A=100^{\circ}C$ $10^{11} \Omega$

Total Dissipation at 25°C

Single Channel250 mW

Dual Channel400 mW

Derate Linearly from 25°C

Single Channel3.3 mW/°C

Dual Channel5.3 mW/°C


Storage Temperature-55°C to +150°C

Operating Temperature-55°C to +100°C


Lead Soldering Time at 260°C.....10 sec.

Dimensions in inches (mm)

Single Channel

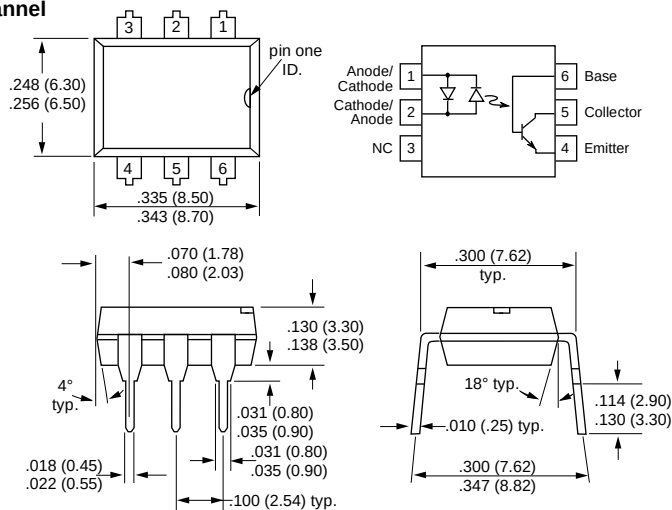

Dual Channel

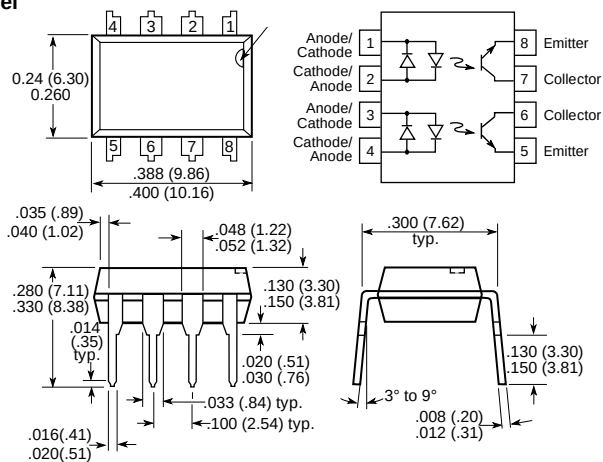

DESCRIPTION

The IL/ILD250/251/252 are bidirectional input optically coupled isolators consisting of two Gallium Arsenide infrared LEDs coupled to a silicon NPN phototransistor per channel.

The IL/ILD250 has a minimum CTR of 50%, the IL/ILD251 has a minimum CTR of 20%, and the IL/ILD252 has a minimum CTR of 100%.

The IL/IL250/1/2 are single channel optocouplers. The

ILD250/1/2 has two isolated channels in a single DIP package.

These optocouplers are ideal for applications requiring AC signal detection and monitoring.

Electrical Characteristics (T_A=25 C)

Parameter	Min.	Typ.	Max	Unit	Condition
Emitter					
Forward Voltage V _F		1/2	1.5	V	I _F =±10 mA
Detector					
BV _{CEO}	30	50		V	I _C =1 mA
BV _{EBO}	7	10		V	I _E =100 μA
BV _{CBO}	70	90		V	I _C =10 μA
I _{CEO}		5	50	nA	V _{CE} =10 V
Package					
V _{CEsat}			0.4	V	I _F =±16 mA, I _C =2 mA
DC Current Transfer Ratio				%	I _F =±10 mA, V _{CE} =10 V
IL/D250	50				
IL/D251	20				
IL/D252	100				
Symmetry CTR @ +10 mA CTR @ -10 mA	0.50	1.0	2.0		

Figure 1. LED forward current versus forward voltage

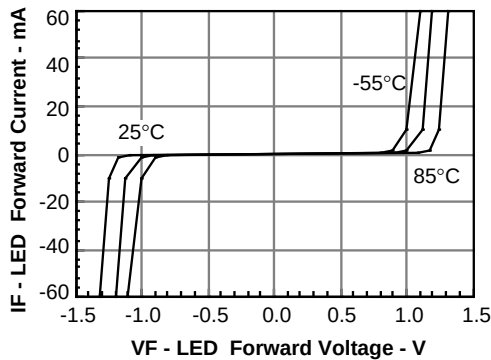


Figure 2. Normalized non-saturated and saturated CTR at T_A = 25°C versus LED current

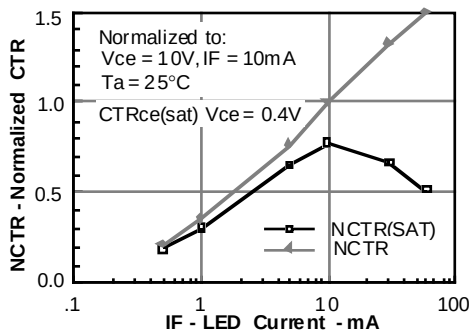


Figure 3. Normalized non-saturated and saturated CTR at T_A = 50°C versus LED current

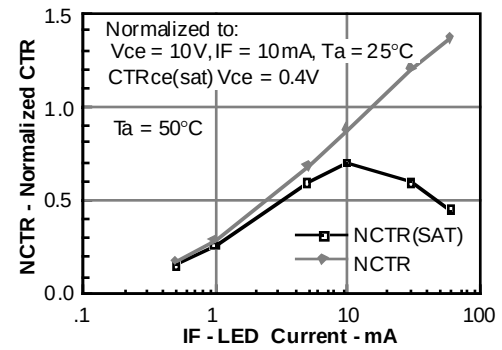


Figure 4. Normalized non-saturated and saturated CTR at T_A = 70°C versus LED current

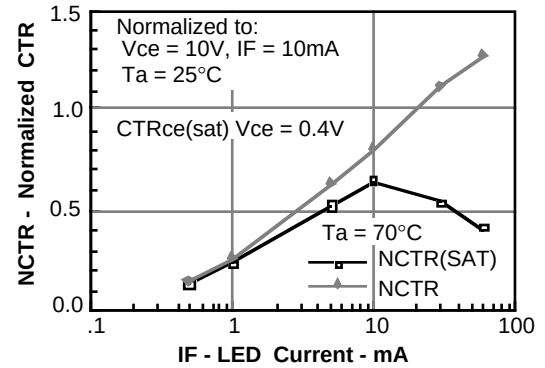


Figure 5. Normalized non-saturated and saturated CTR at T_A = 85°C versus LED current

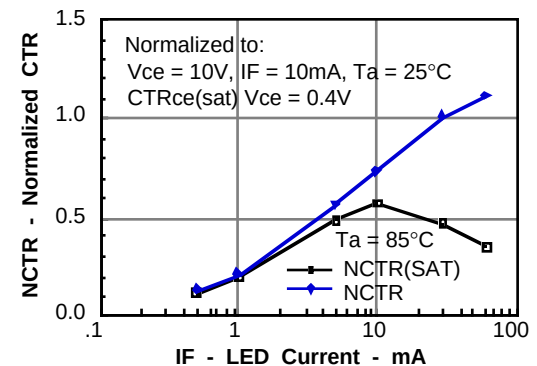


Figure 6. Collector-emitter current versus temperature and LED current

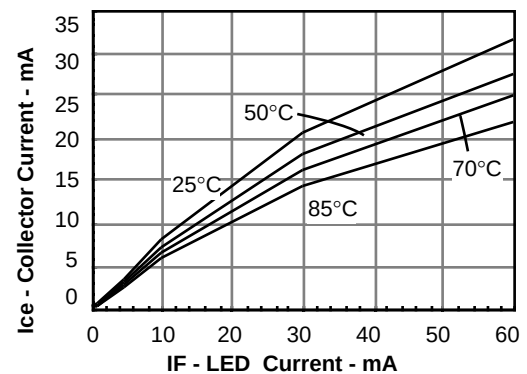


Figure 7. Collector-emitter leakage current versus temperature

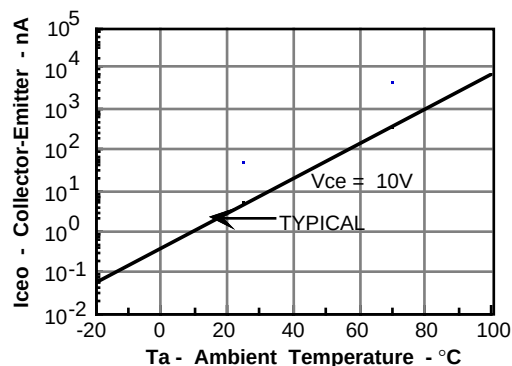


Figure 8. Normalized CTRcb versus LED current and temperature

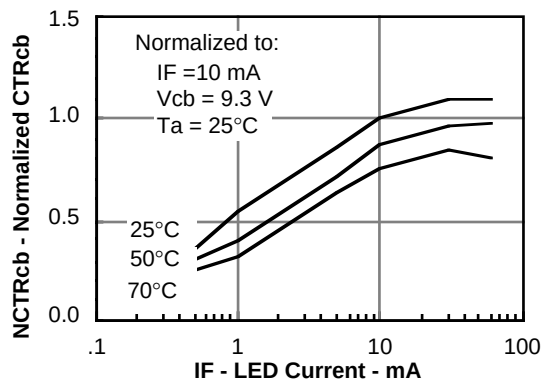


Figure 9. Collector base photocurrent versus LED current

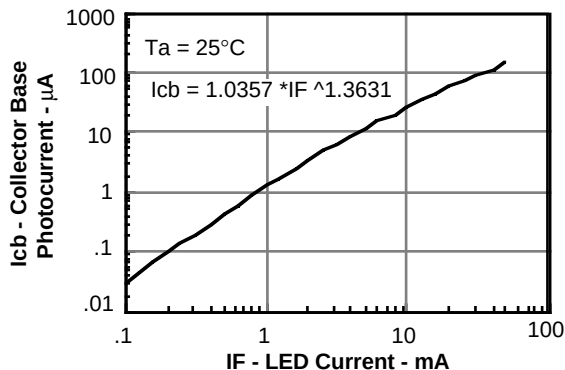


Figure 10. Normalized photocurrent versus I_f and temperature

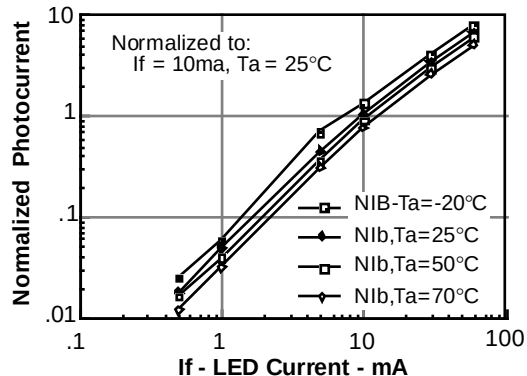


Figure 11. Normalized non-saturated HFE versus base current and temperature

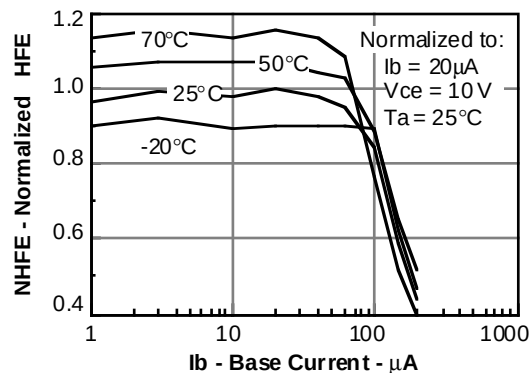


Figure 12. Normalized saturated HFE versus base current and temperature

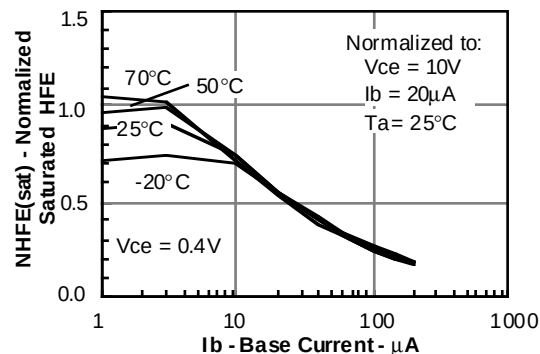


Figure 13. Propagation delay versus collector load resistor

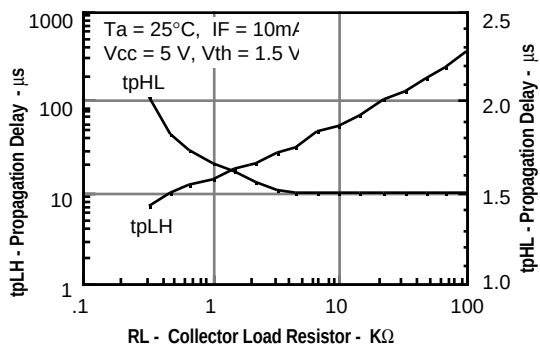


Figure 14. Switching timing and schematic

