


SIEMENS

SURFACE MOUNT LEAD BEND OPTIONS

-004

-009

T-91-30

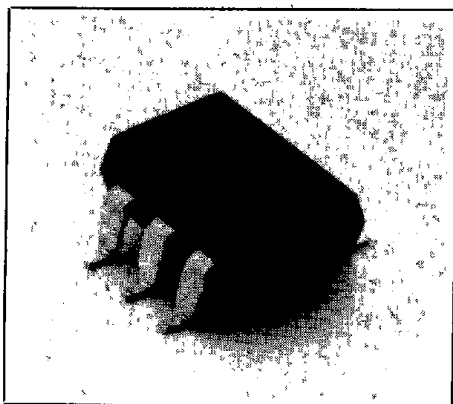

The entire optocoupler line is available with a lead bend for surface mounting.

FEATURES

- **Surface Mountable**
- **Available for all 4, 6, 8 & 16 Pin Plastic Packages with 0.1" Lead Spacing**
- **All Electrical Parameters Remain Unchanged from Standard Packages**
- **Two Stand-off Heights (.004" and .009")**

ORDERING INFORMATION

To order any standard optocoupler with a surface mount lead bend, add -004 or -009 to the standard part number.

Example:

Standard part number: ILD1

Surface Mount: ILD1-004 or
ILD1-009


Dimensions in inches (mm)

Standard Packages (0.1" lead spacing)


4-pin




8-pin



6-pin



16-pin

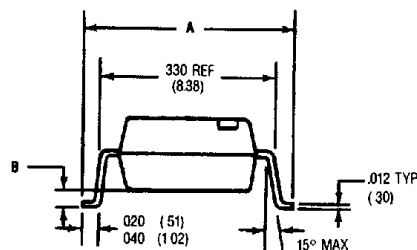

Version Dimension	-004		-009	
	Min.	Max.	Min.	Max.
A	(.947) 373	(.998) 393	(.953) 375	(1.003) 395
B	(.013) 0005	(.102) .0040	(.102) 0040	(.249) 0098

All other package dimensions remain unchanged

Optocouplers
(Optoisolators)