

PNP SILICON POWER TRANSISTORS

2SA1011 transistor is designed for use in general purpose Power amplifier, vertical output application

FEATURES:


- * Collector-Emitter Voltage
 $V_{CEO} = 160V(\text{Min})$
- * DC Current Gain
 $hFE = 60-200 @ I_C = 300mA$

MAXIMUM RATINGS

Characteristic	Symbol	2SA1011	Unit
Collector-Emitter Voltage	V_{CEO}	160	V
Collector-Base Voltage	V_{CBO}	180	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous - Peak	I_C I_{CM}	1.5 3.0	A
Total Power Dissipation @ $T_C = 25^\circ C$ Derate above $25^\circ C$	P_D	25 0.2	W W/ $^\circ C$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ C$


THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	5.0	$^\circ C/W$

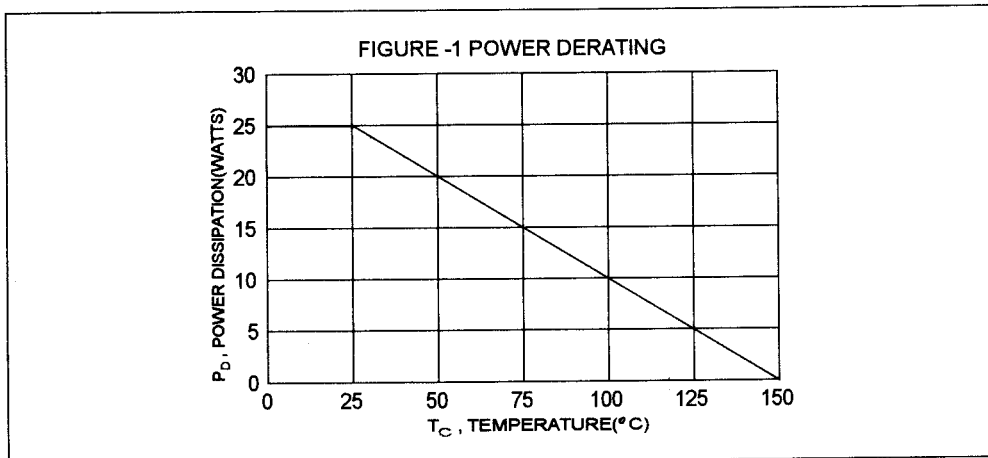


PNP 2SA1011

1.5 AMPERE
POWER
TRANSISTORS
160 VOLTS
25 WATTS



TO-220



PIN 1.BASE
2.COLLECTOR
3.EMITTER
4.COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.31
B	9.78	10.42
C	5.01	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	3.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.97
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Base Voltage ($I_C = 1.0 \text{ mA}$, $I_B = 0$)	V_{CBO}	180		V
Collector-Emitter Voltage ($I_C = 1.0 \text{ mA}$, $I_B = 0$)	V_{CEO}	140		V
Emitter-Base Voltage ($I_B = 1.0 \text{ mA}$, $I_C = 0$)	V_{EBO}	6.0		V
Collector Cutoff Current ($V_{CB} = 120 \text{ V}$, $I_E = 0$)	I_{CBO}		10	μA
Emitter Cutoff Current ($V_{EB} = 4.0 \text{ V}$, $I_C = 0$)	I_{EBO}		10	μA

ON CHARACTERISTICS (1)

DC Current Gain ** ($I_C = 0.3 \text{ A}$, $V_{CE} = 5.0 \text{ V}$)	hFE	60	200	
Collector-Emitter Saturation Voltage ($I_C = 0.5 \text{ A}$, $I_B = 50 \text{ mA}$)	$V_{CE(sat)}$		0.5	V
Base-Emitter On Voltage ($I_C = 10 \text{ mA}$, $V_{CE} = 5 \text{ V}$)	$V_{BE(on)}$		1.5	V

SWITCHING CHARACTERISTICS


Turn-on Time	$V_{CC} = 20 \text{ V}$, $I_C = 0.5 \text{ A}$ $I_{B1} = -I_{B2} = 50 \text{ mA}$ $PW = 20 \mu\text{s}$	t_{on}	0.3	μs
Storage Time		t_s	0.5	μs
Fall Time		t_f	0.2	μs

(1) Pulse Test: Pulse Width = $300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$


** The 2SA1011 is Classified by 300mA hFE as Follows:

60	D	120	100	E	200
----	---	-----	-----	---	-----


$I_c - V_{ce}$

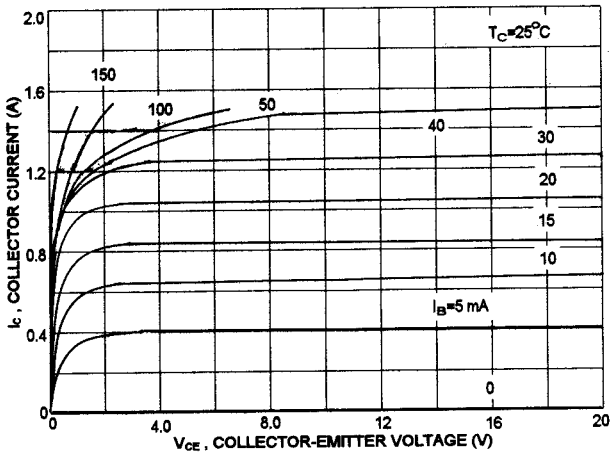


$V_{ce(sat)} - I_c$

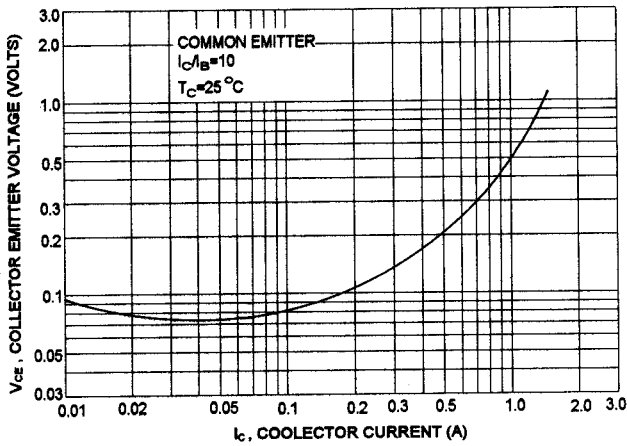

DC CURRENT GAIN

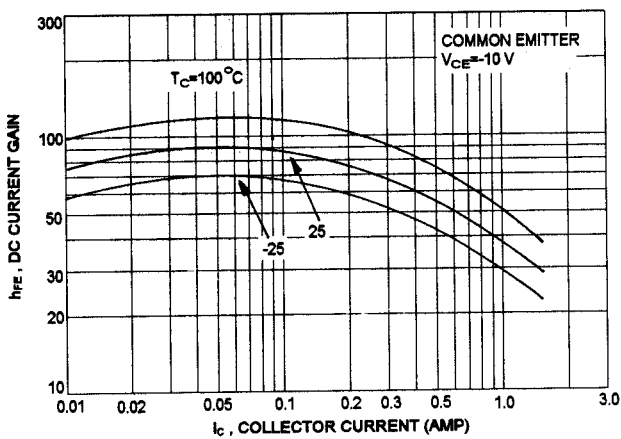

ACTIVE-REGION SAFE OPERATING AREA (SOA)

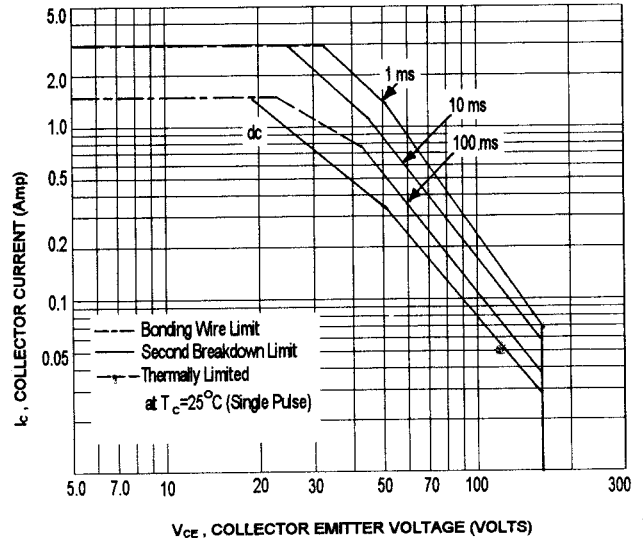

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate $I_c - V_{ce}$ limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

The data of SOA curve is base on $T_{j(pk)} = 150^\circ\text{C}$; T_c is variable depending on conditions. second breakdown pulse limits are valid for duty cycles to 10% provided $T_{j(pk)} \leq 150^\circ\text{C}$. At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.