

isc Silicon NPN Power Transistor

2SC4830

DESCRIPTION



- High Breakdown Voltage-
: $V_{CBO}= 1500V(\text{Min})$
- High Switching Speed
- Low Saturation Voltage

APPLICATIONS

- Horizontal deflection output for high resolution display.
- High speed switching power supply output applications.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	1500	V
V_{CEO}	Collector-Emitter Voltage	600	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	6	A
I_{CM}	Collector Current-Peak	12	A
I_B	Base Current-Continuous	3	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	50	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

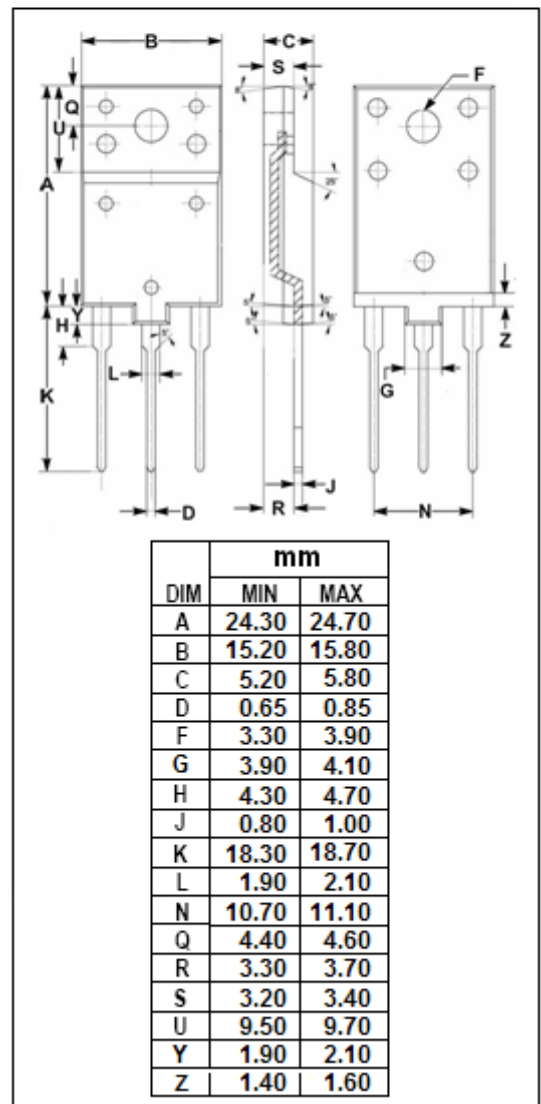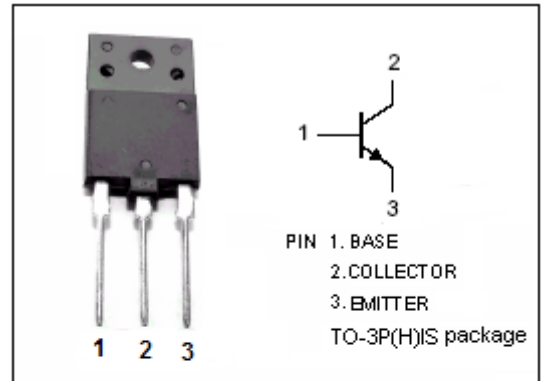

isc Silicon NPN Power Transistor**2SC4830****ELECTRICAL CHARACTERISTICS** $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 4A; I_B= 1A$			5.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 4A; I_B= 1A$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}= 1500V; I_E= 0$			1.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 5V; I_C= 0$			10	μA
h_{FE-1}	DC Current Gain	$I_C= 1A; V_{CE}= 5V$	8			
h_{FE-2}	DC Current Gain	$I_C= 4A; V_{CE}= 5V$	4		8	
f_T	Current-Gain—Bandwidth Product	$I_C= 0.1A; V_{CE}= 10V$		3		MHz
C_{OB}	Output Capacitance	$I_E= 0; V_{CB}= 10V; f_{test}= 1.0MHz$		175		pF

Switching Times; Resistive Load

t_{stg}	Storage Time	$I_C= 4A; I_{B1}= 0.8A; I_{B2}= -1.6A;$ $R_L= 51 \Omega$			2.5	μs
t_f	Fall Time				0.2	μs